

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1256484

Luminaire Tested: P3AS05R129040DE010 E3DLP1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1256484
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R129040DE010 E3DLP1LI
Description: 3in Adjustable LED luminaire with, R12 optic, 4000K CCT AND, 90CRI , E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 314.9 lumens
Efficiency: N/A
Efficacy: 41.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1256484

CATALOG NUMBER: P3AS05R129040DE010 E3DLP1LI

Luminous Intensity Polar Plot

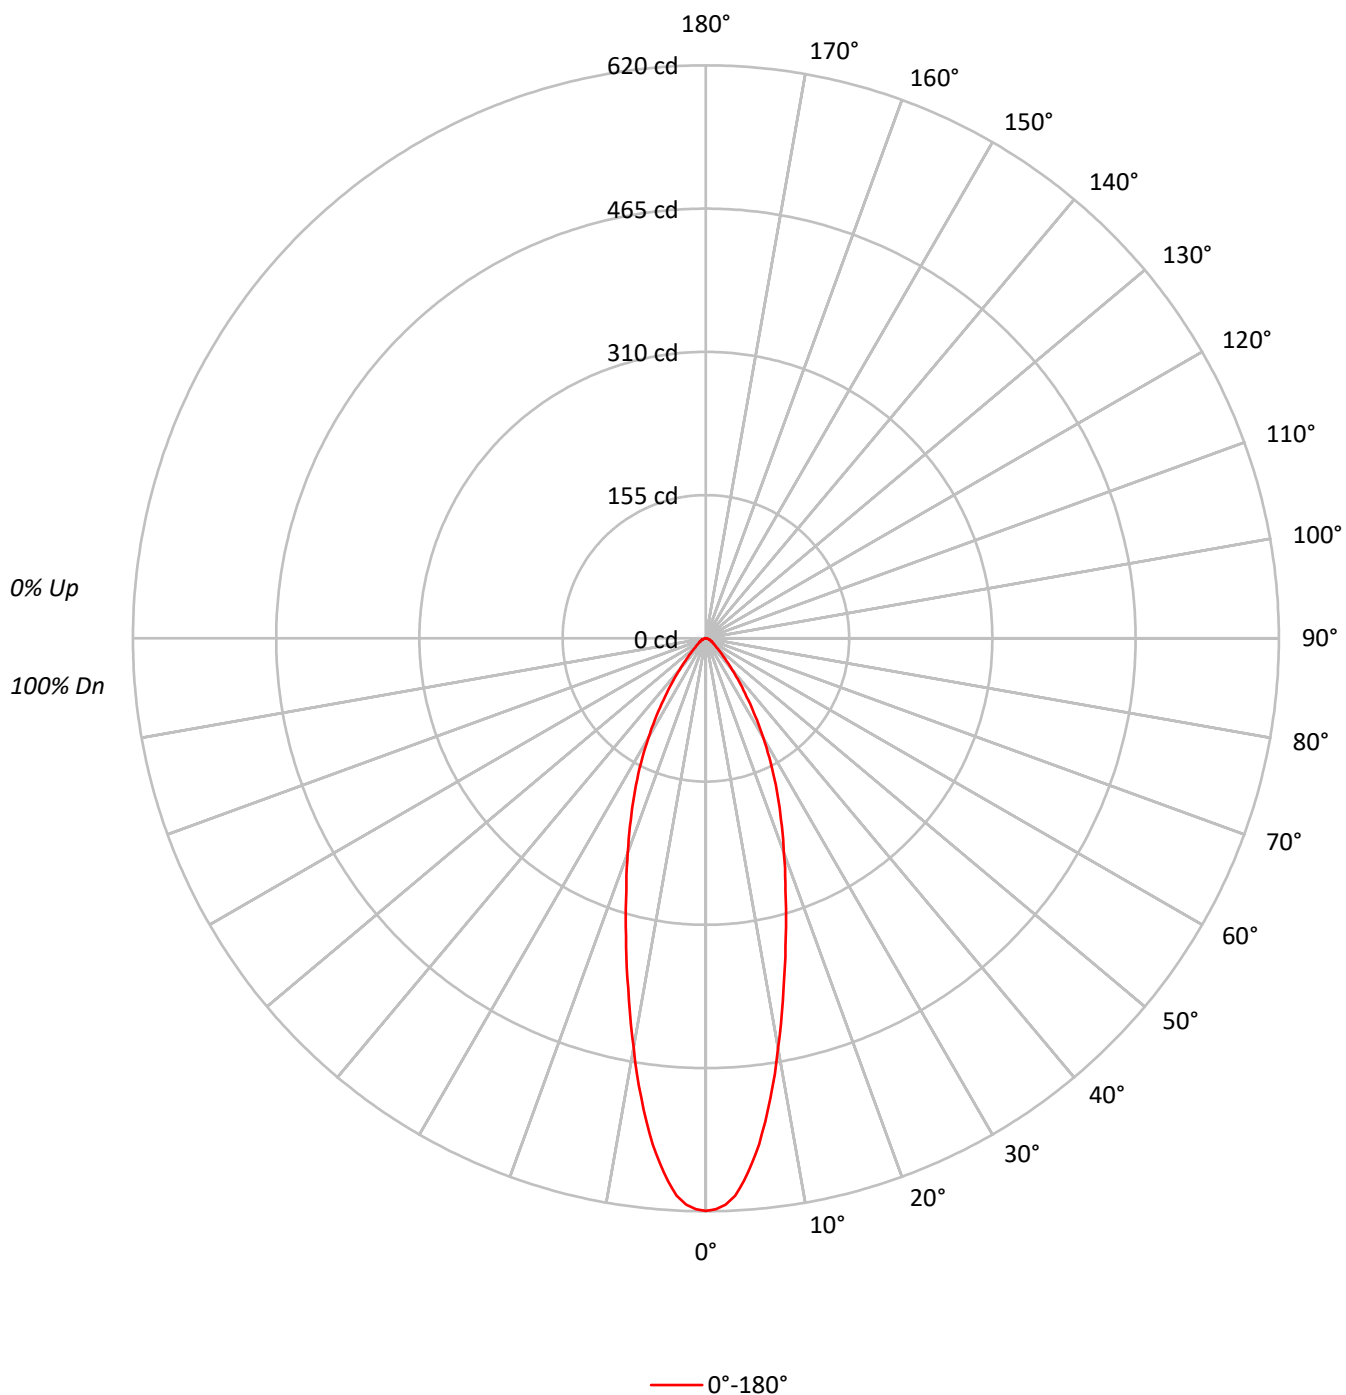

TEST NUMBER: P1256484

CATALOG NUMBER: P3AS05R129040DE010 E3DLP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	106	111	108	106	104	104	102	101		100	99	98		97
2	108	103	98	95	105	101	97	94	98	95	92		95	92	90		92
3	102	96	91	87	100	94	90	86	92	88	85		89	86	83		87
4	97	90	84	80	95	88	83	79	86	82	78		84	81	78		82
5	93	84	78	74	91	83	78	74	81	77	73		80	76	73		78
6	88	79	73	69	87	79	73	69	77	72	69		76	71	68		74
7	84	75	69	65	83	74	69	65	73	68	64		72	67	64		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		68
9	77	68	62	58	76	67	62	58	66	61	58		65	61	57		64
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	135844
5°	125555
10°	100221
15°	75710
20°	57662
25°	43938
30°	31473
35°	20532
40°	12595
45°	7629
50°	5049
55°	3900
60°	3377
65°	2906
70°	2629
75°	2626
80°	1894
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7629 cd/sqm

TEST NUMBER: P1256484

CATALOG NUMBER: P3AS05R129040DE010 E3DLP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.5	16.0
10°-20°	93.2	29.6
20°-30°	83.0	26.4
30°-40°	49.1	15.6
40°-50°	20.1	6.4
50°-60°	9.5	3.0
60°-70°	5.7	1.8
70°-80°	3.0	1.0
80°-90°	0.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	226.7	72.0
0°-40°	275.8	87.6
0°-60°	305.4	97.0
0°-90°	314.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	314.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	620	
5°	570	51
15°	334	93
25°	182	83
35°	77	49
45°	25	20
55°	10	9
65°	6	6
75°	3	3
85°	0	1
90°	0	

TEST NUMBER: P1256484

CATALOG NUMBER: P3AS05R129040DE010 E3DLP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	619.5
1°	617.9
2°	613.3
3°	604.1
4°	588.8
5°	570.4
6°	550.4
7°	526.9
8°	502.3
9°	477.3
10°	450.1
12.5°	388.2
15°	333.5
17.5°	286.5
20°	247.1
22.5°	212.3
25°	181.6
27.5°	151.9
30°	124.3
32.5°	99.2
35°	76.7
37.5°	58.8
40°	44.0
42.5°	32.7
45°	24.6
47.5°	18.9
50°	14.8
52.5°	12.3
55°	10.2
57.5°	8.7
60°	7.7
62.5°	6.6
65°	5.6
67.5°	5.1
70°	4.1
72.5°	3.6
75°	3.1
77.5°	2.0
80°	1.5
82.5°	1.0
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)