

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1256524

Luminaire Tested: P3AS05R209040DE010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1256524
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209040DE010 E3CB1MW
Description: 3in Adjustable LED luminaire with, R20 optic, 4000K CCT AND, 90CRI , E3CB1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 680.0 lumens
Efficiency: N/A
Efficacy: 94.4 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1256524

CATALOG NUMBER: P3AS05R209040DE010 E3CB1MW

Luminous Intensity Polar Plot

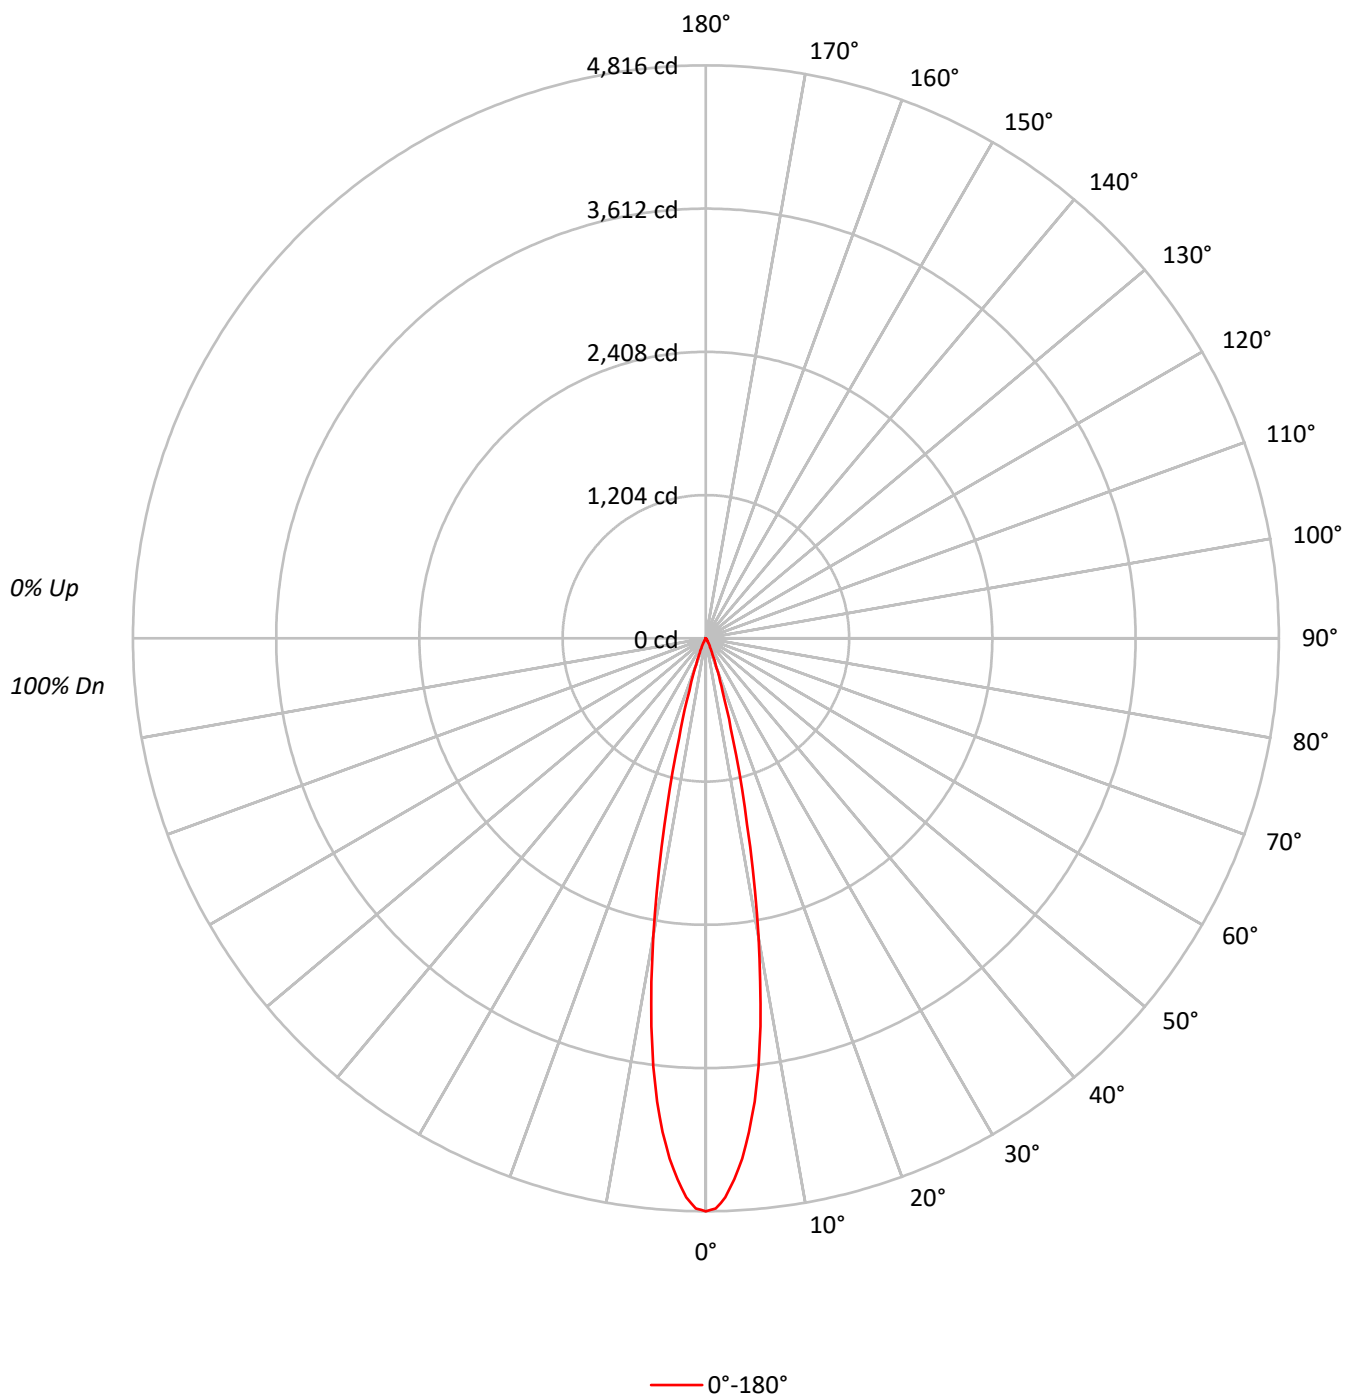

TEST NUMBER: P1256524

CATALOG NUMBER: P3AS05R209040DE010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98		
2	112	109	107	104	110	108	105	103	104	103	101	102	100	99	99	98	97	95		
3	109	105	102	100	108	104	101	99	102	99	97	99	98	96	97	96	95	93		
4	107	102	99	96	105	101	98	96	99	97	95	97	95	93	96	94	92	91		
5	104	99	96	93	103	98	95	93	97	94	92	95	93	91	94	92	91	90		
6	102	97	93	91	101	96	93	90	95	92	90	94	91	89	93	90	89	88		
7	100	94	91	88	99	94	91	88	93	90	88	92	89	87	91	89	87	86		
8	98	92	89	86	97	92	89	86	91	88	86	90	88	86	89	87	85	85		
9	96	90	87	85	95	90	87	85	89	86	84	89	86	84	88	86	84	83		
10	94	89	85	83	93	88	85	83	88	85	83	87	84	83	87	84	82	82		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1056122
5°	916683
10°	566411
15°	196732
20°	60415
25°	21364
30°	7900
35°	3159
40°	1689
45°	682
50°	375
55°	421
60°	482
65°	259
70°	321
75°	424
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 682 cd/sqm

TEST NUMBER: P1256524

CATALOG NUMBER: P3AS05R209040DE010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	345.6	50.8
10°-20°	274.2	40.3
20°-30°	47.5	7.0
30°-40°	8.6	1.3
40°-50°	2.0	0.3
50°-60°	1.0	0.1
60°-70°	0.6	0.1
70°-80°	0.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	667.3	98.1
0°-40°	676.0	99.4
0°-60°	678.9	99.8
0°-90°	680.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	680.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4816	
5°	4164	346
15°	867	274
25°	88	47
35°	12	9
45°	2	2
55°	1	1
65°	0	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1256524

CATALOG NUMBER: P3AS05R209040DE010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	4816.3
1°	4793.1
2°	4701.6
3°	4554.7
4°	4382.5
5°	4164.5
6°	3914.7
7°	3624.1
8°	3293.0
9°	2921.1
10°	2543.8
12.5°	1604.5
15°	866.6
17.5°	462.9
20°	258.9
22.5°	148.0
25°	88.3
27.5°	53.8
30°	31.2
32.5°	18.3
35°	11.8
37.5°	8.1
40°	5.9
42.5°	3.8
45°	2.2
47.5°	1.1
50°	1.1
52.5°	1.1
55°	1.1
57.5°	1.1
60°	1.1
62.5°	0.5
65°	0.5
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.5
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)