

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1256536

Luminaire Tested: P3AS05R209040DE010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1256536
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209040DE010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R20 optic, 4000K CCT AND, 90CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 557.0 lumens
Efficiency: N/A
Efficacy: 77.4 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1256536

CATALOG NUMBER: P3AS05R209040DE010 E3DL1MW

Luminous Intensity Polar Plot

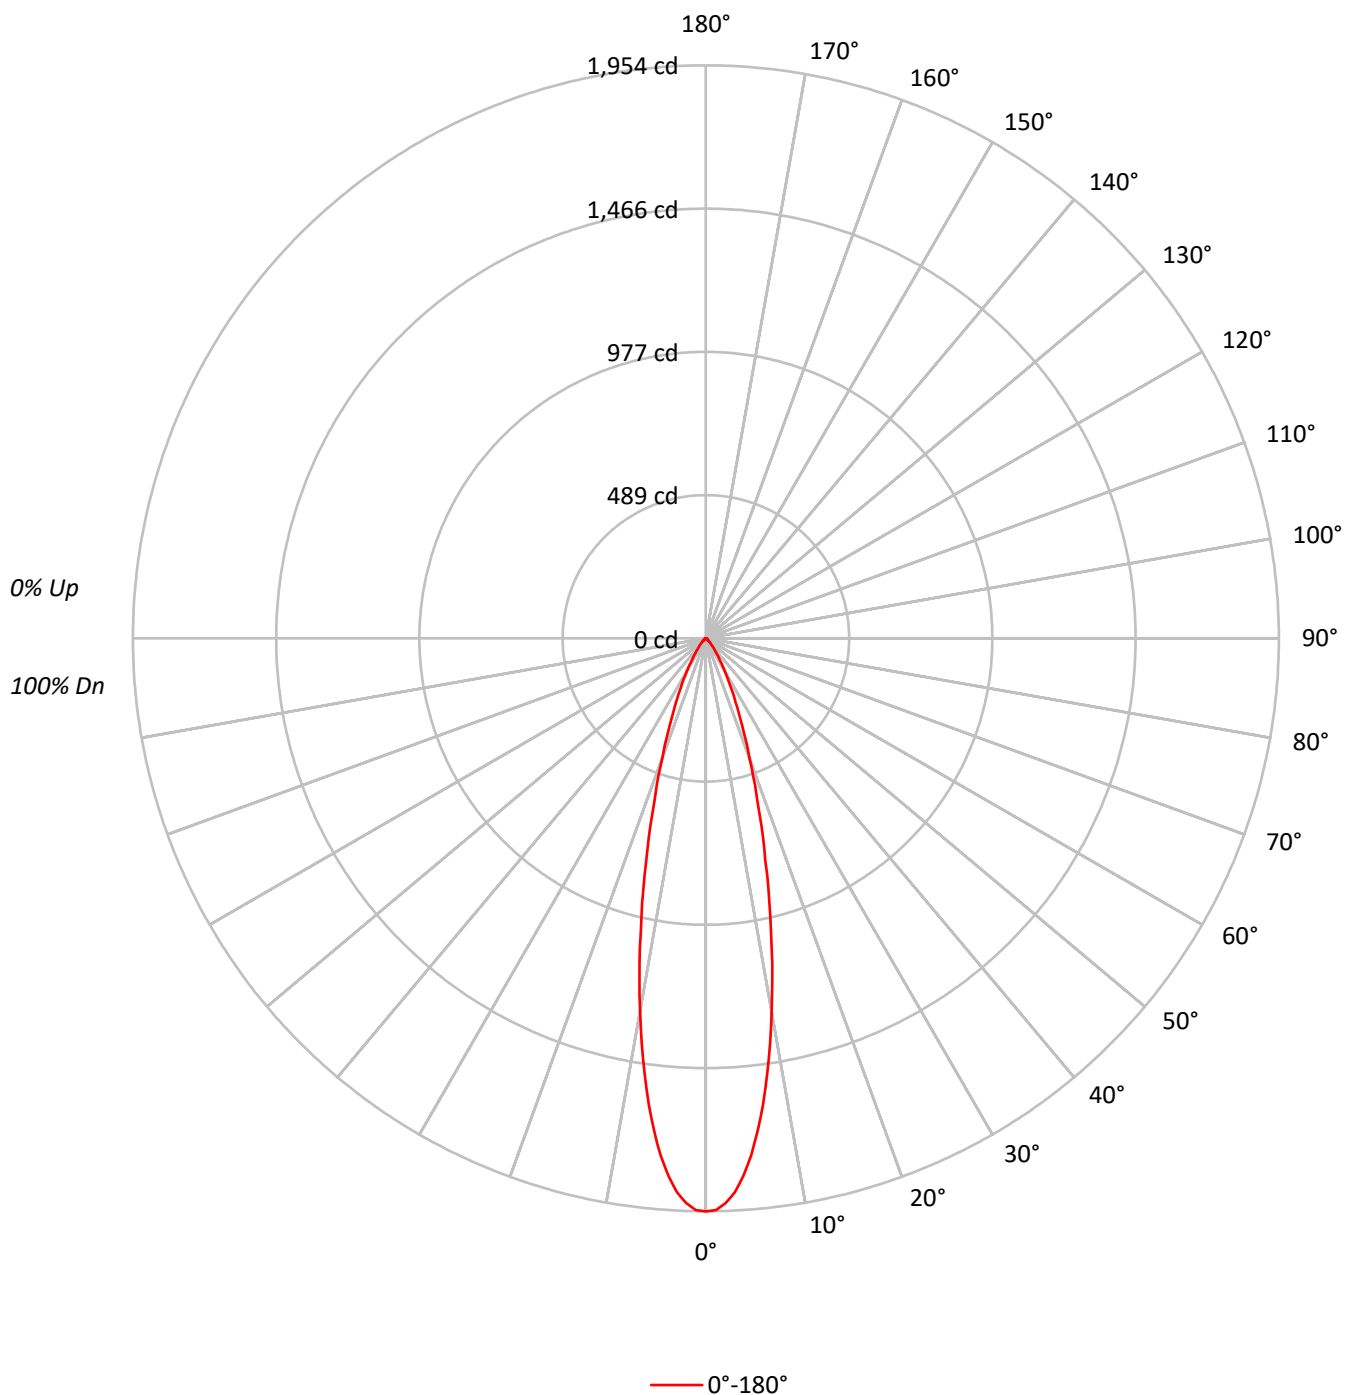

TEST NUMBER: P1256536

CATALOG NUMBER: P3AS05R209040DE010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	106	102	100	108	104	101	98	101	98	96		98	96	94		95	94	92	91
3	106	100	96	93	104	99	95	92	97	93	91		94	92	89		92	90	88	87
4	102	96	91	88	100	95	90	87	92	89	86		91	88	85		89	86	84	83
5	98	91	87	83	97	90	86	83	89	85	82		87	84	81		86	83	81	79
6	95	87	83	79	93	87	82	79	85	81	78		84	81	78		83	80	77	76
7	91	84	79	76	90	83	79	76	82	78	75		81	78	75		80	77	75	73
8	88	81	76	73	87	80	76	73	79	75	72		78	75	72		78	74	72	71
9	85	78	73	70	85	77	73	70	77	73	70		76	72	69		75	72	69	68
10	83	75	71	68	82	75	70	67	74	70	67		73	70	67		73	69	67	66

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	428540
5°	389565
10°	287904
15°	178094
20°	101719
25°	58068
30°	32562
35°	17721
40°	9704
45°	5334
50°	3104
55°	2256
60°	2105
65°	1972
70°	1731
75°	1864
80°	1389
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5334 cd/sqm

TEST NUMBER: P1256536

CATALOG NUMBER: P3AS05R209040DE010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.3	27.5
10°-20°	218.8	39.3
20°-30°	114.2	20.5
30°-40°	44.2	7.9
40°-50°	14.3	2.6
50°-60°	5.6	1.0
60°-70°	3.7	0.7
70°-80°	2.2	0.4
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	486.2	87.3
0°-40°	530.4	95.2
0°-60°	550.3	98.8
0°-90°	557.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	557.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1954	
5°	1770	153
15°	784	219
25°	240	114
35°	66	44
45°	17	14
55°	6	6
65°	4	4
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1256536

CATALOG NUMBER: P3AS05R209040DE010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1954.3
1°	1950.6
2°	1927.4
3°	1891.9
4°	1837.0
5°	1769.8
6°	1690.1
7°	1601.9
8°	1499.7
9°	1400.1
10°	1293.0
12.5°	1027.7
15°	784.5
17.5°	587.1
20°	435.9
22.5°	322.9
25°	240.0
27.5°	177.0
30°	128.6
32.5°	93.1
35°	66.2
37.5°	47.9
40°	33.9
42.5°	24.2
45°	17.2
47.5°	12.4
50°	9.1
52.5°	7.0
55°	5.9
57.5°	5.4
60°	4.8
62.5°	4.3
65°	3.8
67.5°	3.2
70°	2.7
72.5°	2.7
75°	2.2
77.5°	1.6
80°	1.1
82.5°	1.1
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)