

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1256559

Luminaire Tested: P3AS05R259040DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1256559
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259040DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R25 optic, 4000K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 276.0 lumens
Efficiency: N/A
Efficacy: 38.3 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1256559
CATALOG NUMBER: P3AS05R259040DE010 E3DL1GPH

Luminous Intensity Polar Plot

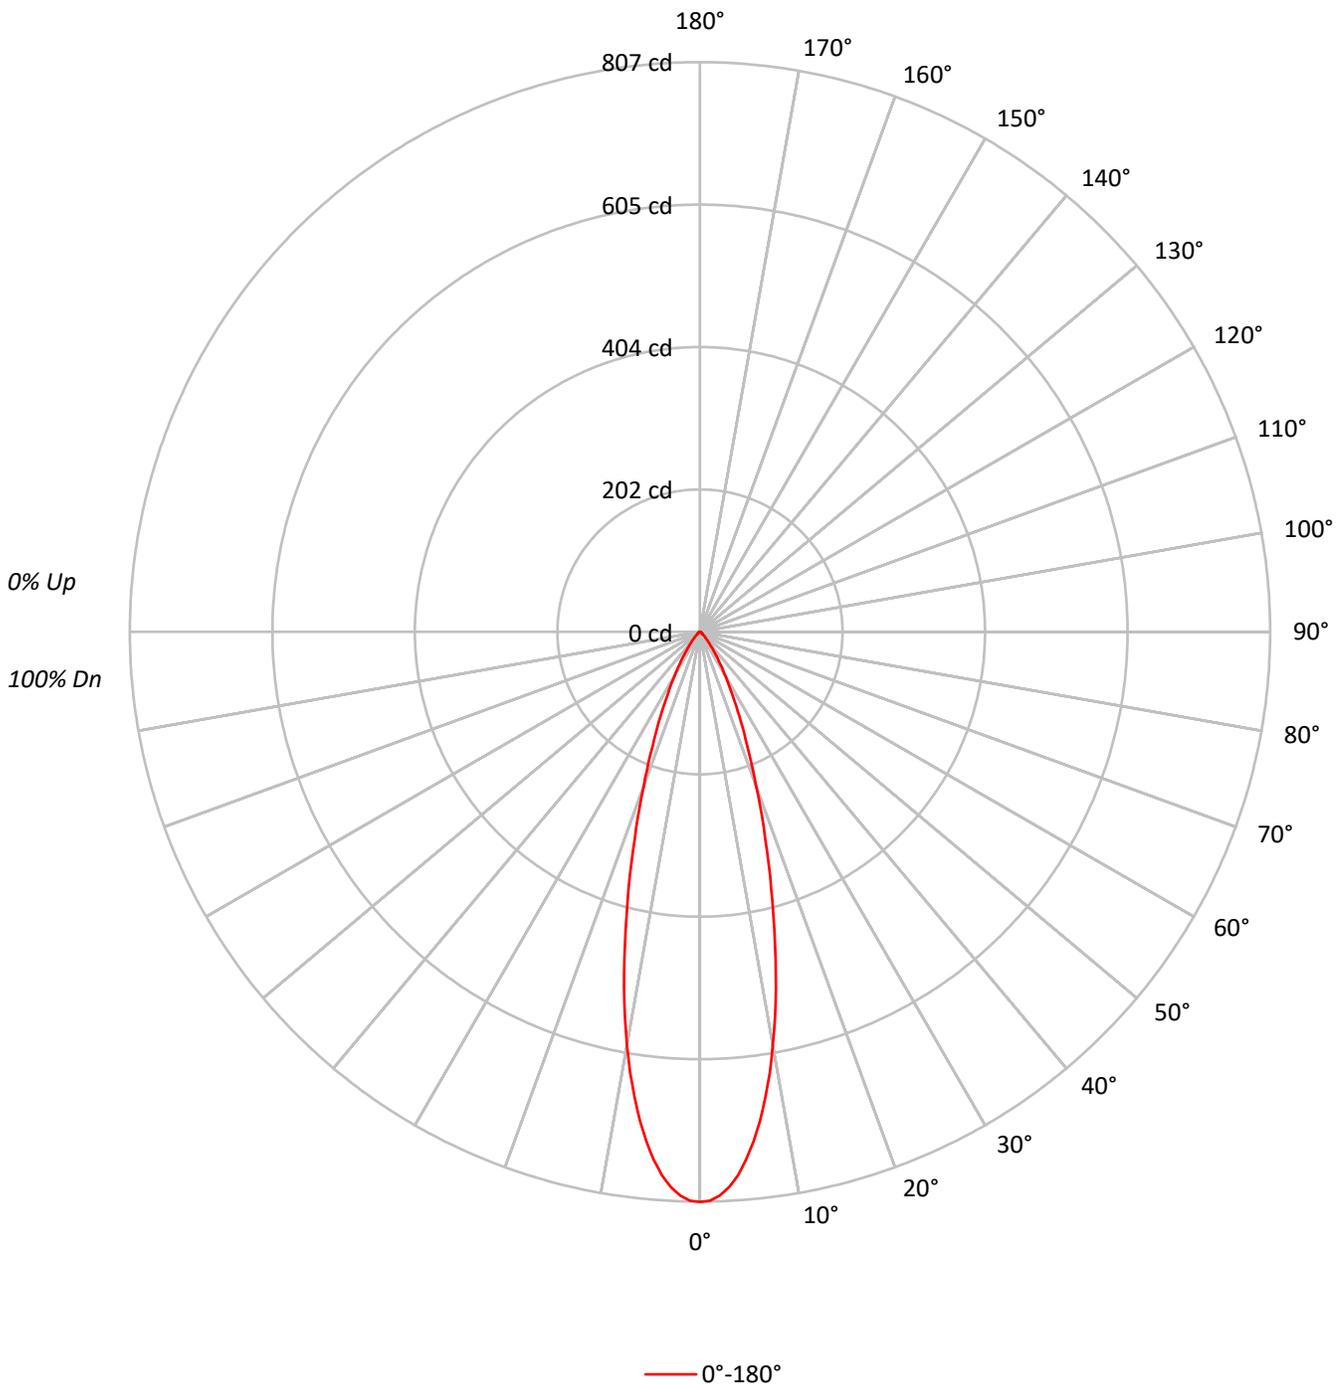



TEST NUMBER: P1256559

CATALOG NUMBER: P3AS05R259040DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	86	86	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	82	82	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	78	78	78
6	94	86	81	78	92	86	81	78	84	80	77	83	79	77	82	78	76	75	75	75	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	75	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	66	66	66	66
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	177047
5°	165177
10°	132329
15°	89808
20°	54348
25°	31792
30°	18104
35°	9958
40°	5296
45°	2791
50°	1603
55°	1223
60°	1053
65°	1090
70°	1026
75°	932
80°	631
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2791 cd/sqm



TEST NUMBER: P1256559

CATALOG NUMBER: P3AS05R259040DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.6	24.1
10°-20°	108.8	39.4
20°-30°	62.2	22.5
30°-40°	24.5	8.9
40°-50°	7.5	2.7
50°-60°	3.0	1.1
60°-70°	2.0	0.7
70°-80°	1.1	0.4
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	237.5	86.0
0°-40°	262.1	94.9
0°-60°	272.6	98.7
0°-90°	276.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	276.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	807	
5°	750	67
15°	396	109
25°	131	62
35°	37	25
45°	9	8
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1256559
CATALOG NUMBER: P3AS05R259040DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	807.4
1°	805.8
2°	799.2
3°	787.6
4°	771.5
5°	750.4
6°	725.6
7°	697.7
8°	665.2
9°	632.0
10°	594.3
11°	557.1
12°	516.2
13°	475.8
14°	434.4
15°	395.6
17.5°	306.8
20°	232.9
22.5°	174.9
25°	131.4
27.5°	97.3
30°	71.5
32.5°	51.7
35°	37.2
37.5°	26.4
40°	18.5
42.5°	12.7
45°	9.0
47.5°	6.3
50°	4.7
52.5°	3.7
55°	3.2
57.5°	2.9
60°	2.4
62.5°	2.1
65°	2.1
67.5°	1.8
70°	1.6
72.5°	1.3
75°	1.1
77.5°	0.8
80°	0.5
82.5°	0.5
85°	0.3
87.5°	0.3



TEST NUMBER: P1256559
CATALOG NUMBER: P3AS05R259040DE010 E3DL1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)