

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1256730

Luminaire Tested: P3AS05R559040DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1256730
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R559040DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 90CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 695.1 lumens
Efficiency: N/A
Efficacy: 96.5 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1256730

CATALOG NUMBER: P3AS05R559040DE010 E3D1LI

Luminous Intensity Polar Plot

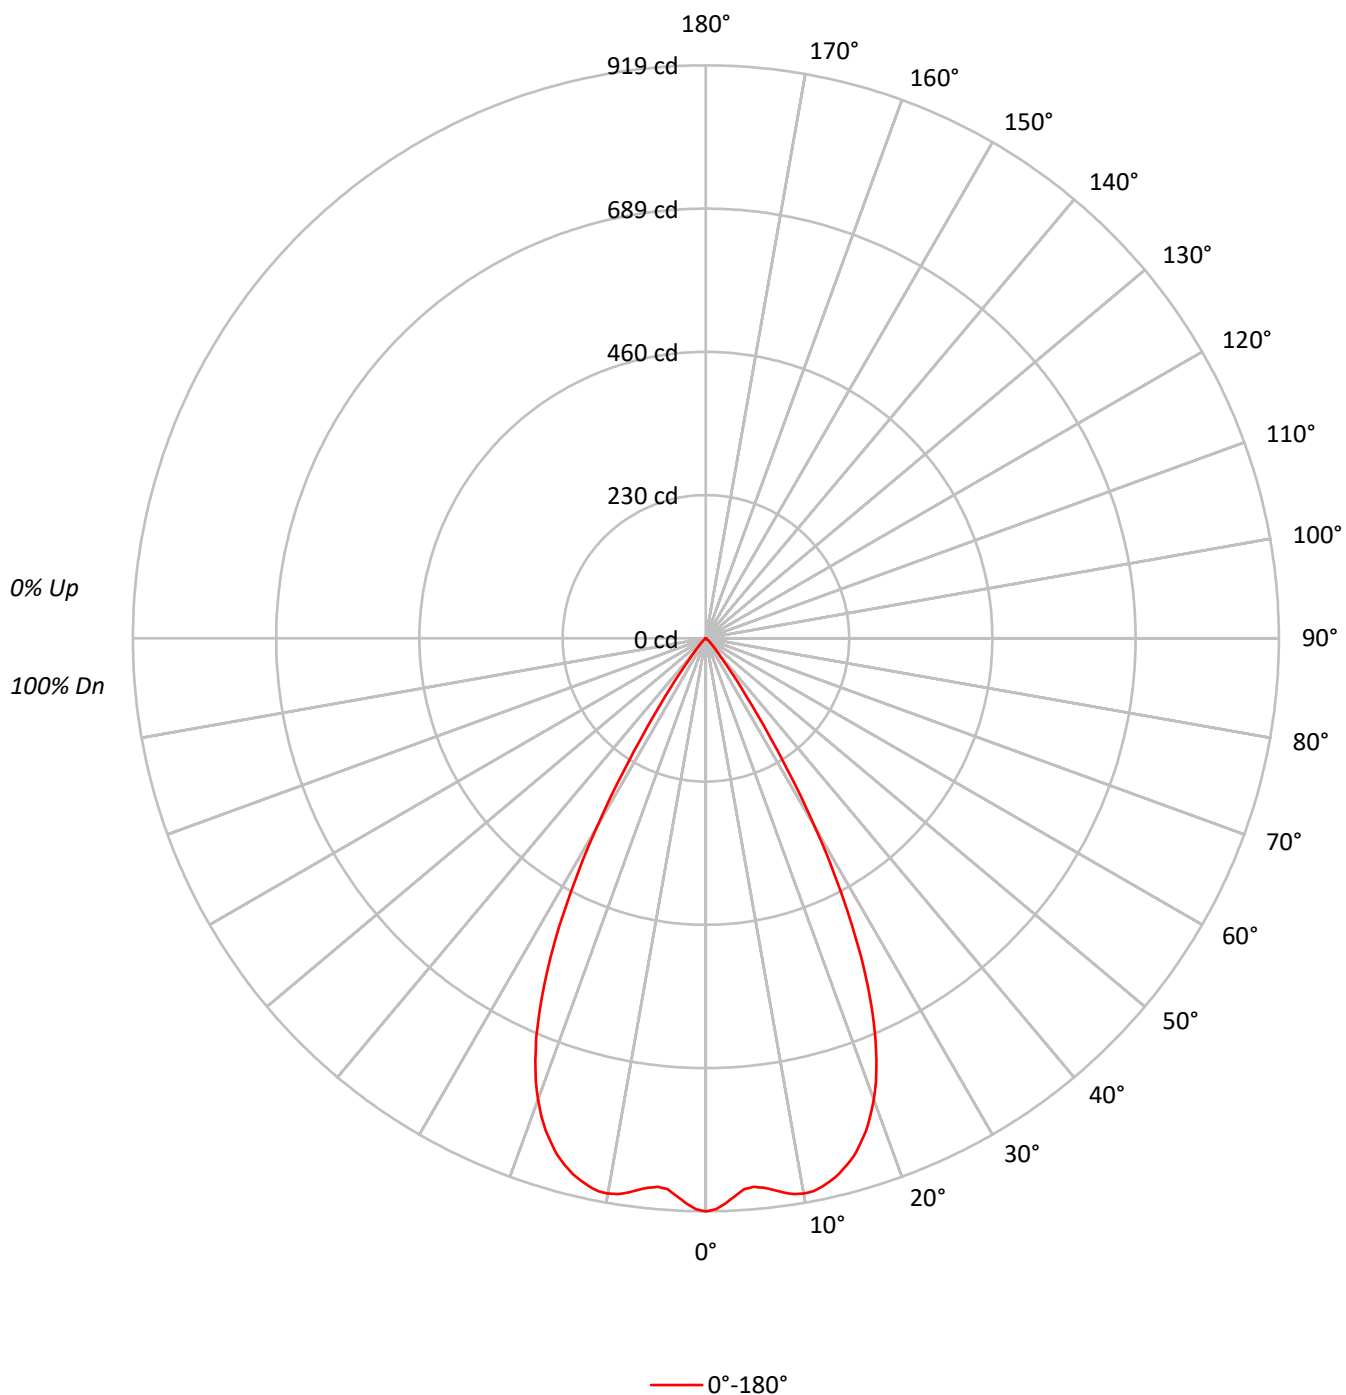

TEST NUMBER: P1256730

CATALOG NUMBER: P3AS05R559040DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	109	107		112	109	107	105		105	104	102		102	100	99		98	97	96
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	92	91
3	104	98	94	90		102	97	93	90		95	91	88		92	89	87		90	88	86
4	100	93	88	84		98	92	87	84		90	86	83		88	84	82		86	83	81
5	95	88	82	79		94	87	82	78		85	81	78		84	80	77		82	79	76
6	91	83	78	74		90	82	77	74		81	76	73		80	76	73		78	75	72
7	87	79	73	70		86	78	73	69		77	72	69		76	72	69		75	71	68
8	83	75	69	66		82	74	69	65		73	69	65		72	68	65		71	68	65
9	80	71	66	62		79	71	66	62		70	65	62		69	65	62		68	64	61
10	77	68	62	59		76	67	62	59		67	62	59		66	62	59		65	61	58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	201541
5°	194408
10°	201355
15°	198526
20°	183743
25°	148581
30°	89052
35°	30169
40°	8301
45°	3690
50°	1092
55°	191
60°	132
65°	156
70°	192
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3690 cd/sqm

TEST NUMBER: P1256730

CATALOG NUMBER: P3AS05R559040DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.5	12.3
10°-20°	243.5	35.0
20°-30°	270.6	38.9
30°-40°	84.2	12.1
40°-50°	10.1	1.5
50°-60°	0.8	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	599.6	86.3
0°-40°	683.8	98.4
0°-60°	694.7	100.0
0°-90°	695.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	695.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	919	
5°	883	85
15°	874	243
25°	614	271
35°	113	84
45°	12	10
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1256730

CATALOG NUMBER: P3AS05R559040DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	919.1
1°	915.7
2°	906.7
3°	895.6
4°	885.6
5°	883.2
6°	885.8
7°	891.4
8°	897.7
9°	902.7
10°	904.3
11°	903.3
12°	899.0
13°	892.4
14°	884.8
15°	874.5
16°	862.6
17°	847.6
18°	830.7
19°	810.3
20°	787.4
21°	761.2
22°	730.3
23°	696.3
24°	657.2
25°	614.1
26°	566.9
27°	516.7
28°	463.1
29°	407.9
30°	351.7
31°	295.2
32°	240.0
32.5°	215.5
33°	190.1
34°	147.1
35°	112.7
36°	85.8
37°	63.6
37.5°	54.4
38°	47.3
39°	35.9
40°	29.0
42.5°	18.5
45°	11.9



TEST NUMBER: P1256730

CATALOG NUMBER: P3AS05R559040DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	7.1
50°	3.2
52.5°	1.1
55°	0.5
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)