

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257066

Luminaire Tested: P3AS09R459040DE010 E3DLP1LI

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1257066  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R459040DE010 E3DLP1LI  
Description: 3in Adjustable LED luminaire with, R45 optic, 4000K CCT AND, 90CRI , E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 568.0 lumens  
Efficiency: N/A  
Efficacy: 51.2 lumens/watt  
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1257066  
CATALOG NUMBER: P3AS09R459040DE010 E3DLP1LI

### Luminous Intensity Polar Plot

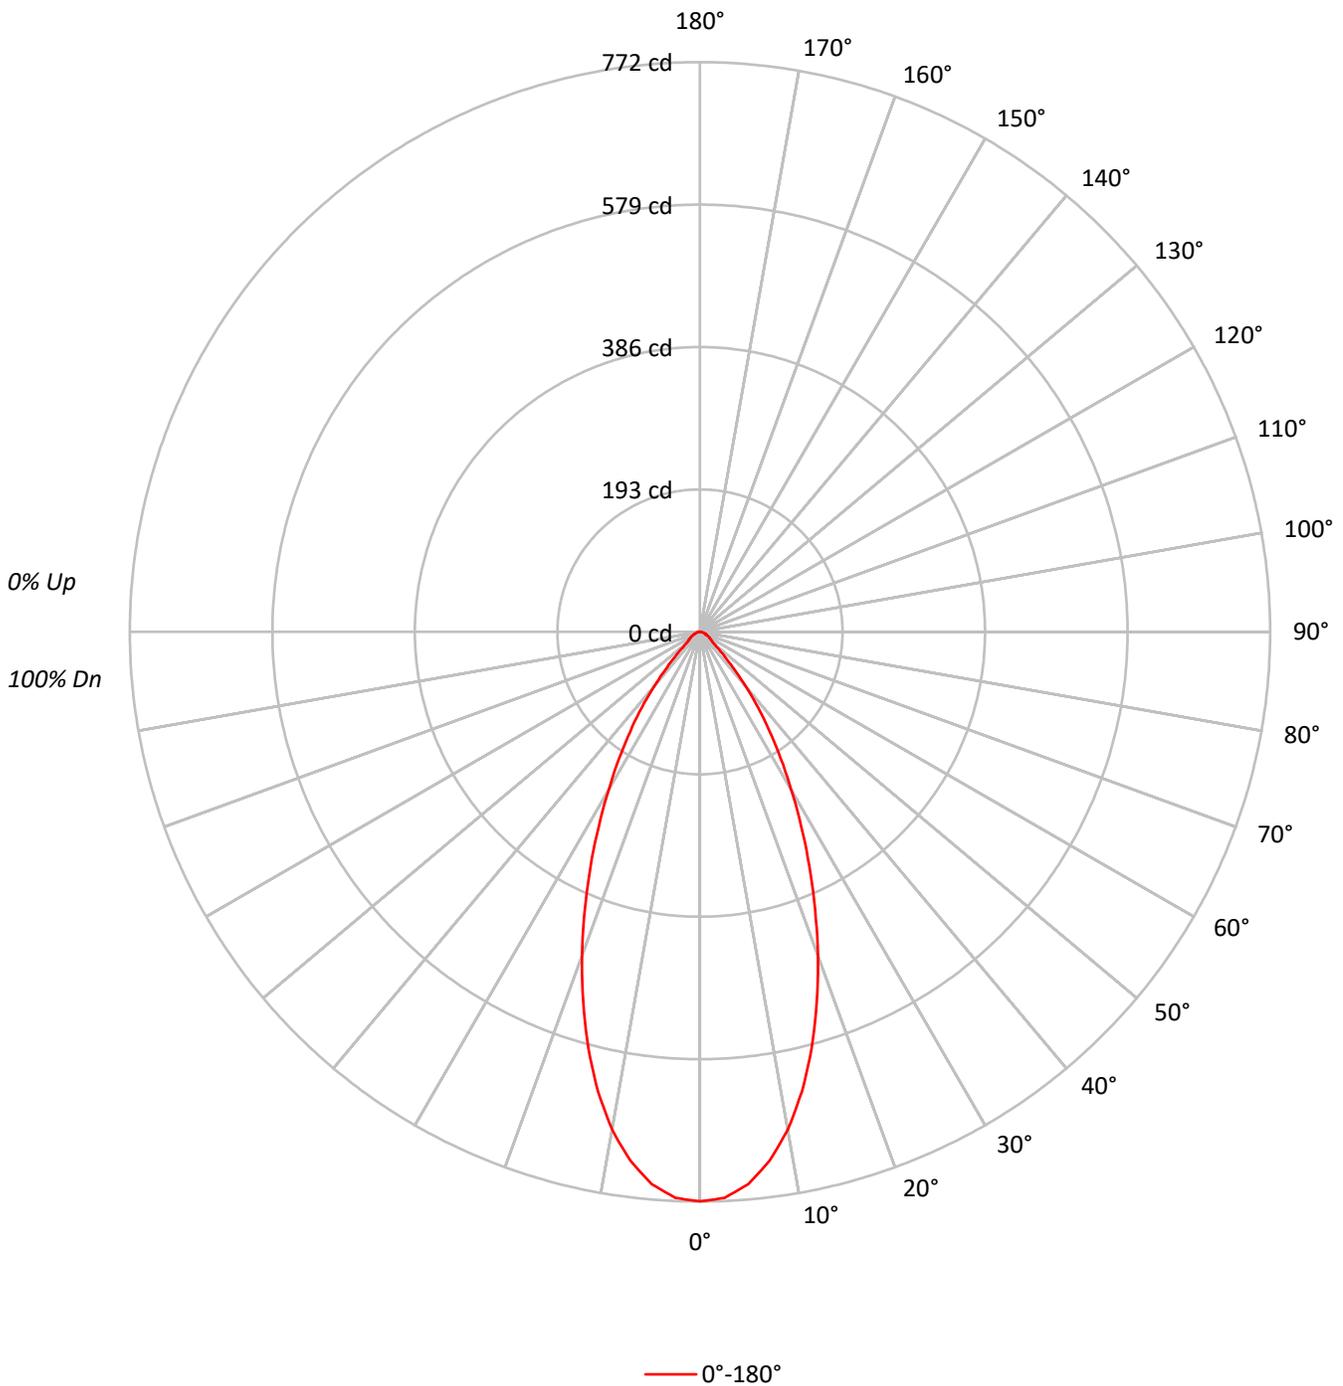



TEST NUMBER: P1257066  
 CATALOG NUMBER: P3AS09R459040DE010 E3DLP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86				86
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79				79
4	96	88	83	78	94	87	82	78	85	81	77	83	79	76	81	78	75	74				74
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69				69
6	87	78	72	67	85	77	71	67	75	70	66	74	69	66	73	69	66	64				64
7	83	73	67	63	81	72	67	63	71	66	62	70	65	62	69	65	61	60				60
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56				56
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53				53
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50				50

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	169175
5°	165331
10°	152502
15°	132623
20°	108953
25°	84755
30°	62592
35°	44035
40°	27480
45°	14885
50°	8051
55°	6920
60°	6228
65°	5292
70°	4552
75°	4660
80°	3915
85°	4026

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14885 cd/sqm



TEST NUMBER: P1257066  
 CATALOG NUMBER: P3AS09R459040DE010 E3DLP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	69.6	12.2
10°-20°	161.5	28.4
20°-30°	160.3	28.2
30°-40°	103.2	18.2
40°-50°	39.8	7.0
50°-60°	16.2	2.8
60°-70°	10.2	1.8
70°-80°	5.5	1.0
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	391.4	68.9
0°-40°	494.6	87.1
0°-60°	550.5	96.9
0°-90°	568.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	568.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	772	
5°	751	70
15°	584	161
25°	350	160
35°	164	103
45°	48	40
55°	18	16
65°	10	10
75°	6	5
85°	2	2
90°	0	



TEST NUMBER: P1257066  
CATALOG NUMBER: P3AS09R459040DE010 E3DLP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	771.5
2.5°	767.6
5°	751.1
7.5°	722.7
10°	684.9
12.5°	637.7
15°	584.2
17.5°	525.9
20°	466.9
22.5°	407.0
25°	350.3
27.5°	296.8
30°	247.2
32.5°	203.9
35°	164.5
37.5°	129.1
40°	96.0
42.5°	69.3
45°	48.0
47.5°	32.3
50°	23.6
52.5°	19.7
55°	18.1
57.5°	15.7
60°	14.2
62.5°	11.8
65°	10.2
67.5°	8.7
70°	7.1
72.5°	6.3
75°	5.5
77.5°	3.9
80°	3.1
82.5°	2.4
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)