

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257329

Luminaire Tested: P3AS13R209040DE010 E3PHLD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1257329
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R209040DE010 E3PHLD1MW
Description: 3in Adjustable LED luminaire with, R20 optic, 4000K CCT AND, 90CRI , E3PHLD1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 720.0 lumens
Efficiency: N/A
Efficacy: 49.3 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.68
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1257329
CATALOG NUMBER: P3AS13R209040DE010 E3PHLD1MW

Luminous Intensity Polar Plot

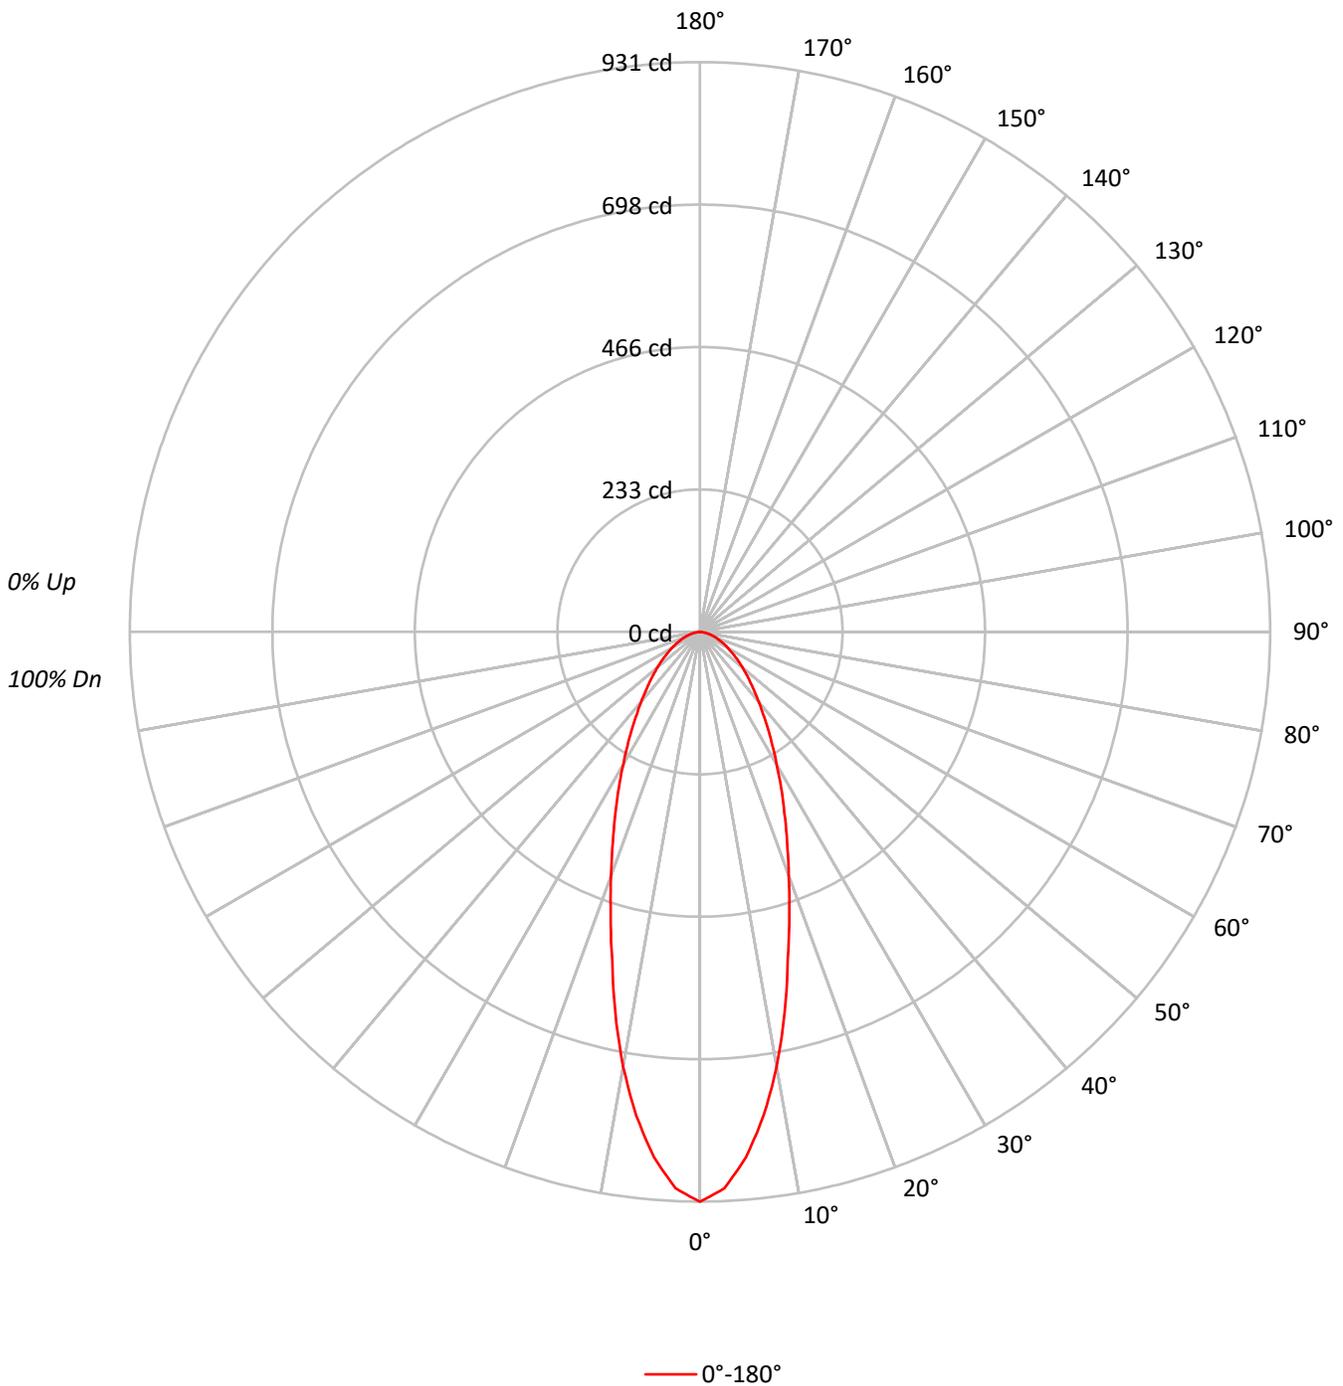



TEST NUMBER: P1257329
 CATALOG NUMBER: P3AS13R209040DE010 E3PHLD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90	90	90	90
2	104	98	93	89	102	96	92	88	93	89	86	90	87	84	87	85	82	80	80	80	80
3	98	90	83	78	95	88	82	78	85	81	77	83	79	75	80	77	74	72	72	72	72
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66	66	66	66
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	70	65	62	60	60	60	60
6	81	70	63	58	79	70	63	58	68	62	58	66	61	57	65	60	57	55	55	55	55
7	76	66	59	54	75	65	58	53	64	58	53	62	57	53	61	56	53	51	51	51	51
8	72	61	54	50	71	61	54	50	60	54	49	58	53	49	57	53	49	47	47	47	47
9	69	58	51	46	67	57	51	46	56	50	46	55	50	46	54	49	46	44	44	44	44
10	65	54	48	43	64	54	48	43	53	47	43	52	47	43	51	46	43	41	41	41	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	204194
5°	189698
10°	160629
15°	125744
20°	98965
25°	78876
30°	63427
35°	51718
40°	42766
45°	36035
50°	30907
55°	26532
60°	23156
65°	20339
70°	17439
75°	15335
80°	11491
85°	7548

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 36035 cd/sqm



TEST NUMBER: P1257329
 CATALOG NUMBER: P3AS13R209040DE010 E3PHLD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.8	10.8
10°-20°	155.1	21.5
20°-30°	150.6	20.9
30°-40°	121.6	16.9
40°-50°	90.4	12.6
50°-60°	62.8	8.7
60°-70°	39.3	5.5
70°-80°	19.1	2.7
80°-90°	3.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	383.4	53.3
0°-40°	505.1	70.2
0°-60°	658.3	91.4
0°-90°	720.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	720.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	931	
5°	862	78
15°	554	155
25°	326	151
35°	193	122
45°	116	90
55°	69	63
65°	39	39
75°	18	19
85°	3	3
90°	0	



TEST NUMBER: P1257329
CATALOG NUMBER: P3AS13R209040DE010 E3PHLD1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	931.2
2.5°	910.1
5°	861.8
7.5°	796.9
10°	721.4
12.5°	638.4
15°	553.9
17.5°	484.5
20°	424.1
22.5°	371.3
25°	326.0
27.5°	286.8
30°	250.5
32.5°	220.3
35°	193.2
37.5°	169.0
40°	149.4
42.5°	131.3
45°	116.2
47.5°	102.6
50°	90.6
52.5°	80.0
55°	69.4
57.5°	60.4
60°	52.8
62.5°	46.8
65°	39.2
67.5°	33.2
70°	27.2
72.5°	22.6
75°	18.1
77.5°	13.6
80°	9.1
82.5°	4.5
85°	3.0
87.5°	0.0
90°	0.0

(END OF REPORT)