

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257348

Luminaire Tested: P3AS13R259040DE010 E3DLD1GPH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1257348  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R259040DE010 E3DLD1GPH  
Description: 3in Adjustable LED luminaire with, R25 optic, 4000K CCT AND, 90CRI , E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 411.0 lumens  
Efficiency: N/A  
Efficacy: 28.2 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1257348

CATALOG NUMBER: P3AS13R259040DE010 E3DLD1GPH

### Luminous Intensity Polar Plot

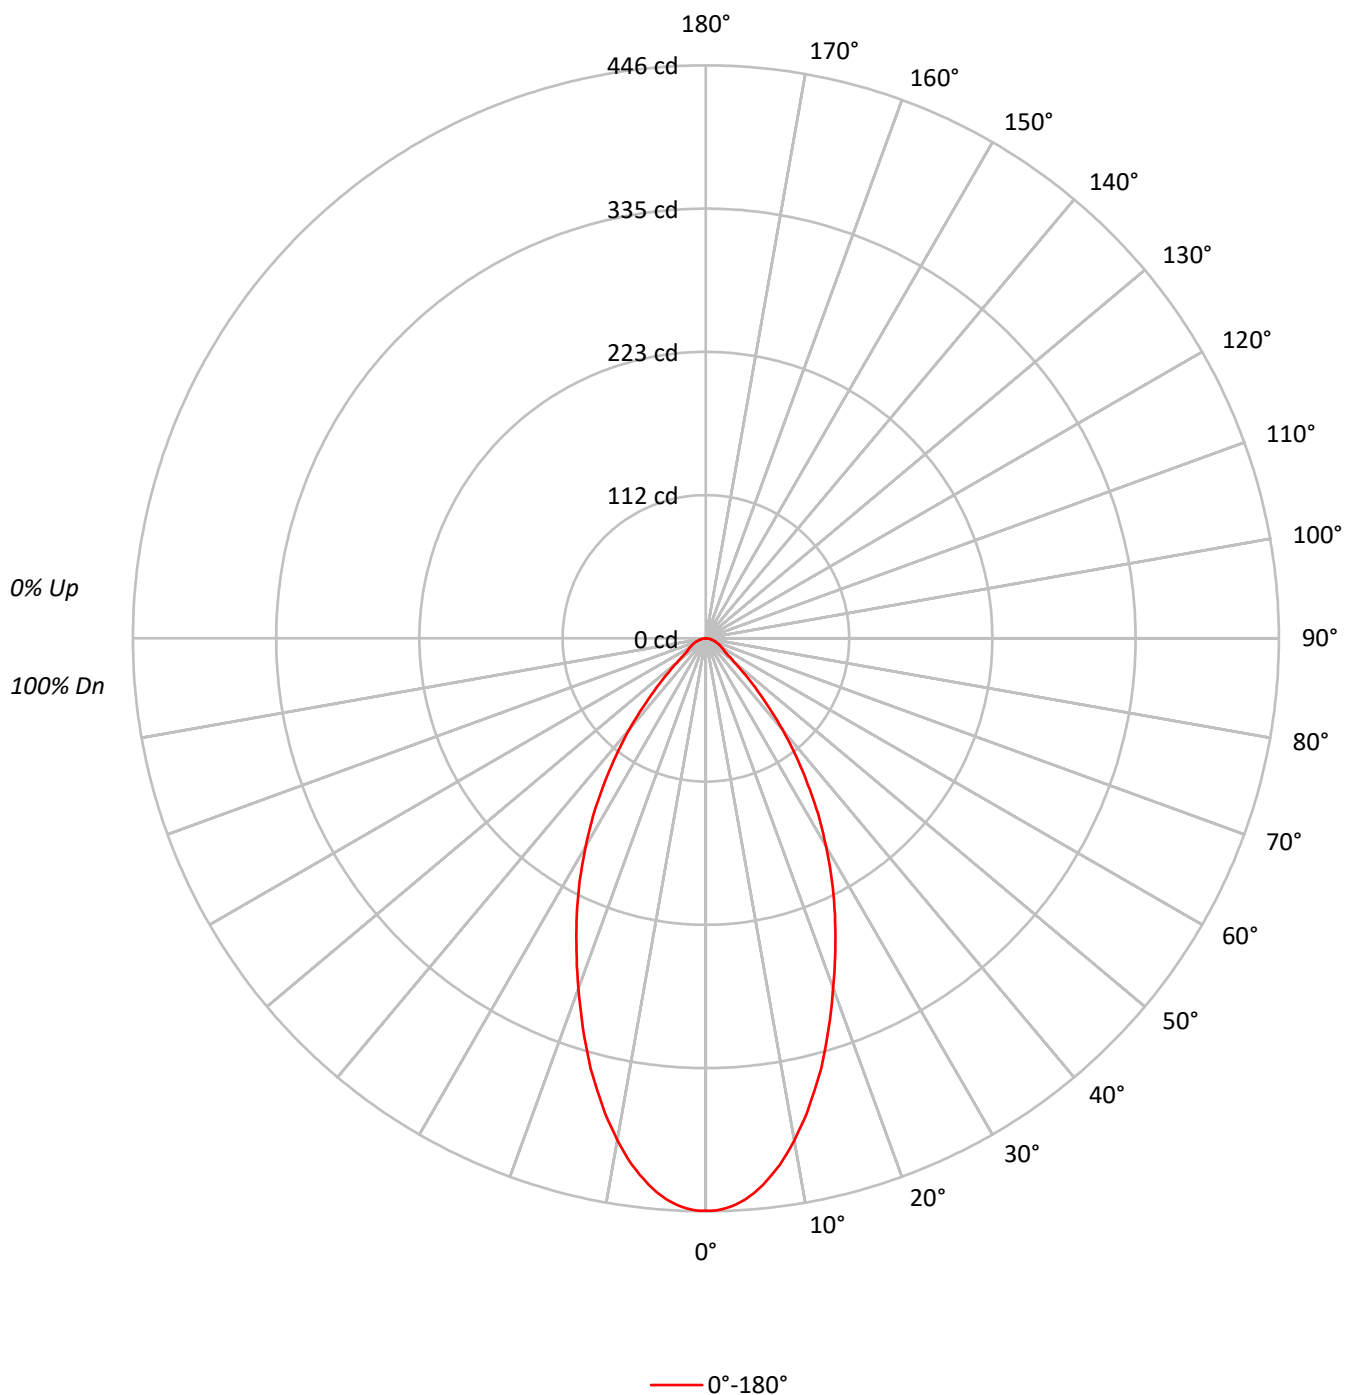

TEST NUMBER: P1257348

CATALOG NUMBER: P3AS13R259040DE010 E3DLD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 112 | 109 | 106 | 104 | 110 | 107 | 105 | 102 | 103 | 101 | 99  |  | 99  | 98  | 96  |  | 96  |
| 2   | 106 | 100 | 96  | 92  | 104 | 99  | 94  | 91  | 95  | 92  | 89  |  | 92  | 89  | 87  |  | 89  |
| 3   | 100 | 92  | 87  | 82  | 98  | 91  | 86  | 82  | 88  | 84  | 80  |  | 86  | 82  | 79  |  | 83  |
| 4   | 94  | 85  | 79  | 74  | 92  | 84  | 78  | 74  | 82  | 77  | 73  |  | 80  | 76  | 72  |  | 78  |
| 5   | 89  | 79  | 73  | 68  | 87  | 78  | 72  | 68  | 76  | 71  | 67  |  | 75  | 70  | 66  |  | 73  |
| 6   | 84  | 74  | 67  | 62  | 82  | 73  | 67  | 62  | 71  | 66  | 62  |  | 70  | 65  | 61  |  | 69  |
| 7   | 79  | 69  | 62  | 58  | 78  | 68  | 62  | 58  | 67  | 61  | 57  |  | 66  | 61  | 57  |  | 65  |
| 8   | 75  | 65  | 58  | 54  | 74  | 64  | 58  | 53  | 63  | 57  | 53  |  | 62  | 57  | 53  |  | 61  |
| 9   | 71  | 61  | 54  | 50  | 70  | 60  | 54  | 50  | 59  | 54  | 50  |  | 58  | 53  | 50  |  | 57  |
| 10  | 68  | 57  | 51  | 47  | 67  | 57  | 51  | 47  | 56  | 50  | 47  |  | 55  | 50  | 46  |  | 54  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 97690 |
| 5°  | 95355 |
| 10° | 88353 |
| 15° | 78684 |
| 20° | 67626 |
| 25° | 57487 |
| 30° | 47324 |
| 35° | 36861 |
| 40° | 26535 |
| 45° | 16839 |
| 50° | 9961  |
| 55° | 6843  |
| 60° | 6271  |
| 65° | 5863  |
| 70° | 5257  |
| 75° | 4745  |
| 80° | 4546  |
| 85° | 3774  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 16839 cd/sqm

TEST NUMBER: P1257348

CATALOG NUMBER: P3AS13R259040DE010 E3DLD1GPH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 40.2   | 9.8       |
| 10°-20°   | 96.2   | 23.4      |
| 20°-30°   | 108.7  | 26.5      |
| 30°-40°   | 86.0   | 20.9      |
| 40°-50°   | 43.4   | 10.6      |
| 50°-60°   | 17.4   | 4.2       |
| 60°-70°   | 11.1   | 2.7       |
| 70°-80°   | 6.1    | 1.5       |
| 80°-90°   | 1.7    | 0.4       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 245.1  | 59.6      |
| 0°-40°    | 331.1  | 80.6      |
| 0°-60°    | 392.0  | 95.4      |
| 0°-90°    | 411.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 411.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 446 |      |
| 5°  | 433 | 40   |
| 15° | 347 | 96   |
| 25° | 238 | 109  |
| 35° | 138 | 86   |
| 45° | 54  | 43   |
| 55° | 18  | 17   |
| 65° | 11  | 11   |
| 75° | 6   | 6    |
| 85° | 2   | 2    |
| 90° | 0   |      |

TEST NUMBER: P1257348

CATALOG NUMBER: P3AS13R259040DE010 E3DLD1GPH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 445.5 |
| 1°    | 445.5 |
| 2°    | 443.9 |
| 3°    | 441.4 |
| 4°    | 437.8 |
| 5°    | 433.2 |
| 6°    | 427.5 |
| 7°    | 420.9 |
| 8°    | 413.7 |
| 9°    | 405.5 |
| 10°   | 396.8 |
| 11°   | 387.1 |
| 12°   | 377.9 |
| 13°   | 367.1 |
| 14°   | 356.9 |
| 15°   | 346.6 |
| 17.5° | 318.0 |
| 20°   | 289.8 |
| 22.5° | 263.2 |
| 25°   | 237.6 |
| 27.5° | 212.5 |
| 30°   | 186.9 |
| 32.5° | 162.8 |
| 35°   | 137.7 |
| 37.5° | 114.7 |
| 40°   | 92.7  |
| 42.5° | 72.2  |
| 45°   | 54.3  |
| 47.5° | 40.4  |
| 50°   | 29.2  |
| 52.5° | 22.0  |
| 55°   | 17.9  |
| 57.5° | 16.4  |
| 60°   | 14.3  |
| 62.5° | 12.8  |
| 65°   | 11.3  |
| 67.5° | 9.7   |
| 70°   | 8.2   |
| 72.5° | 7.2   |
| 75°   | 5.6   |
| 77.5° | 4.6   |
| 80°   | 3.6   |
| 82.5° | 2.6   |
| 85°   | 1.5   |
| 87.5° | 0.5   |



TEST NUMBER: P1257348

CATALOG NUMBER: P3AS13R259040DE010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)