

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257534

Luminaire Tested: P3AS13R559040DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1257534
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R559040DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 90CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 761.0 lumens
Efficiency: N/A
Efficacy: 52.1 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1257534

CATALOG NUMBER: P3AS13R559040DE010 E3DLP1WMH

Luminous Intensity Polar Plot

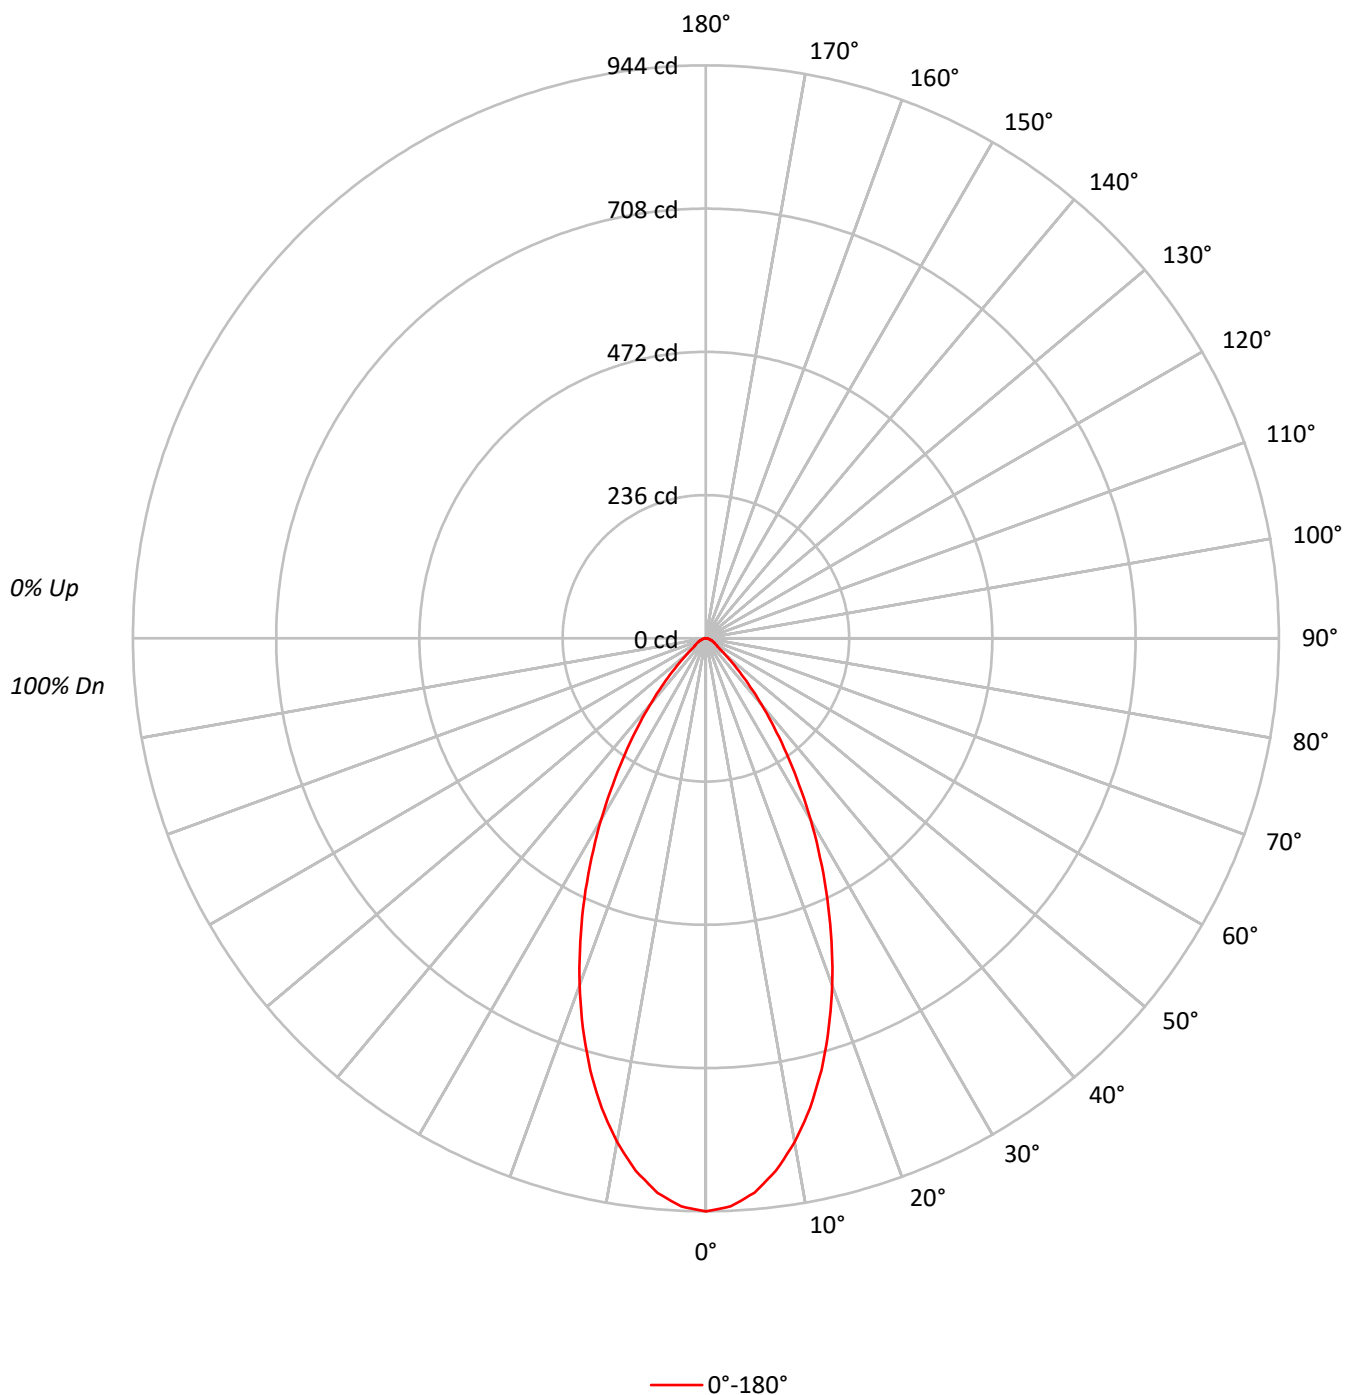

TEST NUMBER: P1257534

CATALOG NUMBER: P3AS13R559040DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		97
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	96	88	82	77	94	87	81	77	84	80	76		82	78	75		80
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	60		68
8	78	68	62	57	76	67	61	57	66	61	57		65	60	57		64
9	74	64	58	54	73	63	58	54	62	57	53		62	57	53		61
10	70	60	55	51	69	60	54	50	59	54	50		58	54	50		58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	207023
5°	201826
10°	187638
15°	167084
20°	141996
25°	114587
30°	87355
35°	62131
40°	40991
45°	24313
50°	14260
55°	8793
60°	7806
65°	7057
70°	6027
75°	5338
80°	5304
85°	5284

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24313 cd/sqm

TEST NUMBER: P1257534

CATALOG NUMBER: P3AS13R559040DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.1	11.2
10°-20°	204.1	26.8
20°-30°	216.1	28.4
30°-40°	146.0	19.2
40°-50°	64.0	8.4
50°-60°	22.9	3.0
60°-70°	13.4	1.8
70°-80°	7.0	0.9
80°-90°	2.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	505.3	66.4
0°-40°	651.3	85.6
0°-60°	738.3	97.0
0°-90°	761.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	761.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	944	
5°	917	85
15°	736	204
25°	474	216
35°	232	146
45°	78	64
55°	23	23
65°	14	13
75°	6	7
85°	2	2
90°	0	

TEST NUMBER: P1257534

CATALOG NUMBER: P3AS13R559040DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	944.1
2.5°	936.7
5°	916.9
7.5°	884.5
10°	842.7
12.5°	792.5
15°	736.0
17.5°	673.3
20°	608.5
22.5°	540.5
25°	473.6
27.5°	407.7
30°	345.0
32.5°	285.4
35°	232.1
37.5°	184.0
40°	143.2
42.5°	107.7
45°	78.4
47.5°	57.5
50°	41.8
52.5°	29.3
55°	23.0
57.5°	20.9
60°	17.8
62.5°	15.7
65°	13.6
67.5°	11.5
70°	9.4
72.5°	8.4
75°	6.3
77.5°	5.2
80°	4.2
82.5°	3.1
85°	2.1
87.5°	1.0
90°	0.0

(END OF REPORT)