

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257692

Luminaire Tested: P3AS17R209040DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1257692
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R209040DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R20 optic, 4000K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 703.0 lumens
Efficiency: N/A
Efficacy: 33.2 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1257692
CATALOG NUMBER: P3AS17R209040DE010 E3DL1GPH

Luminous Intensity Polar Plot

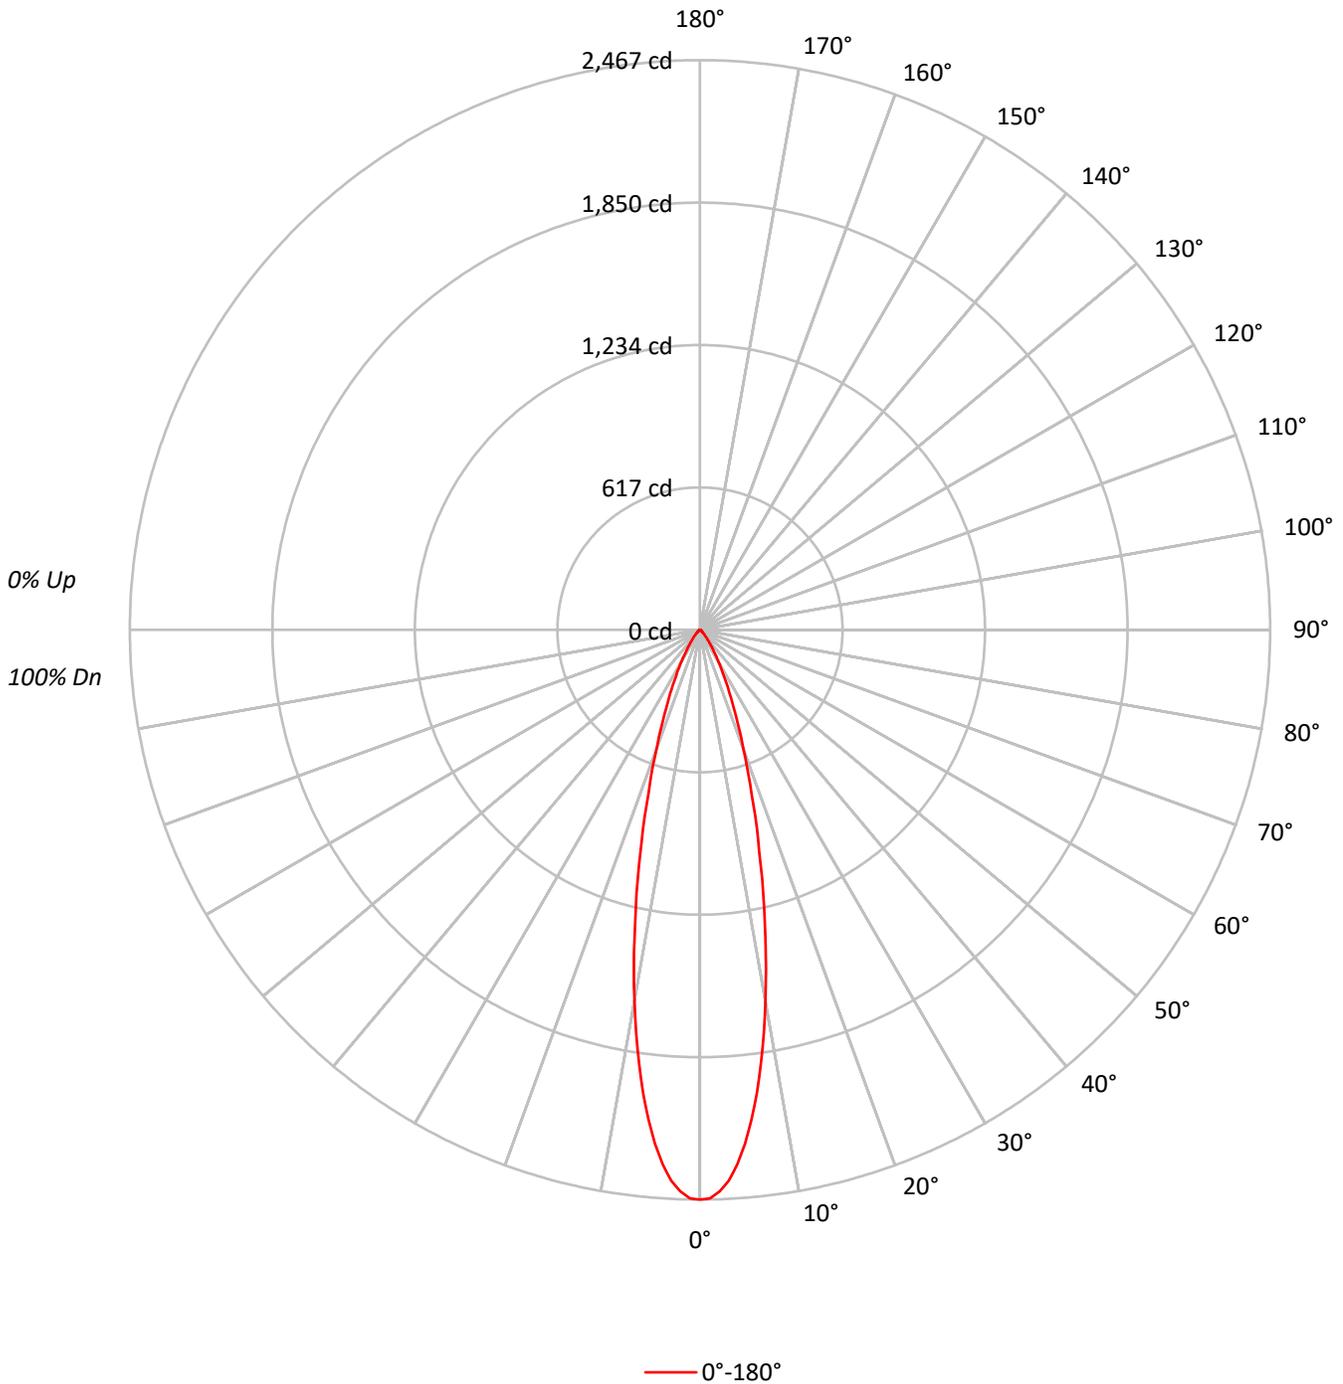



TEST NUMBER: P1257692

CATALOG NUMBER: P3AS17R209040DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87	87	87	87
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83	83	83	83
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79	79	79	79
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77	76	76	76	76
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73	73	73	73
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	78	74	72	71	71	71	71
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69	68	68	68	68
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67	66	66	66	66

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	540878
5°	491678
10°	363387
15°	224791
20°	128368
25°	73286
30°	41095
35°	22352
40°	12252
45°	6729
50°	3923
55°	2867
60°	2675
65°	2491
70°	2180
75°	2288
80°	1768
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6729 cd/sqm



TEST NUMBER: P1257692
 CATALOG NUMBER: P3AS17R209040DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.4	27.5
10°-20°	276.1	39.3
20°-30°	144.1	20.5
30°-40°	55.7	7.9
40°-50°	18.1	2.6
50°-60°	7.1	1.0
60°-70°	4.7	0.7
70°-80°	2.8	0.4
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	613.7	87.3
0°-40°	669.4	95.2
0°-60°	694.6	98.8
0°-90°	703.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	703.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2467	
5°	2234	193
15°	990	276
25°	303	144
35°	84	56
45°	22	18
55°	8	7
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1257692
CATALOG NUMBER: P3AS17R209040DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2466.6
1°	2461.8
2°	2432.6
3°	2387.8
4°	2318.6
5°	2233.7
6°	2133.1
7°	2021.8
8°	1892.7
9°	1767.1
10°	1632.0
12.5°	1297.1
15°	990.2
17.5°	740.9
20°	550.1
22.5°	407.5
25°	302.9
27.5°	223.4
30°	162.3
32.5°	117.5
35°	83.5
37.5°	60.4
40°	42.8
42.5°	30.6
45°	21.7
47.5°	15.6
50°	11.5
52.5°	8.8
55°	7.5
57.5°	6.8
60°	6.1
62.5°	5.4
65°	4.8
67.5°	4.1
70°	3.4
72.5°	3.4
75°	2.7
77.5°	2.0
80°	1.4
82.5°	1.4
85°	0.7
87.5°	0.7
90°	0.0

(END OF REPORT)