

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257731

Luminaire Tested: P3AS17R259040DE010 E3DLP1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1257731
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R259040DE010 E3DLP1H
Description: 3in Adjustable LED luminaire with, R25 optic, 4000K CCT AND, 90CRI , E3DLP1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 888.0 lumens
Efficiency: N/A
Efficacy: 41.9 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.68
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1257731

CATALOG NUMBER: P3AS17R259040DE010 E3DLP1H

Luminous Intensity Polar Plot

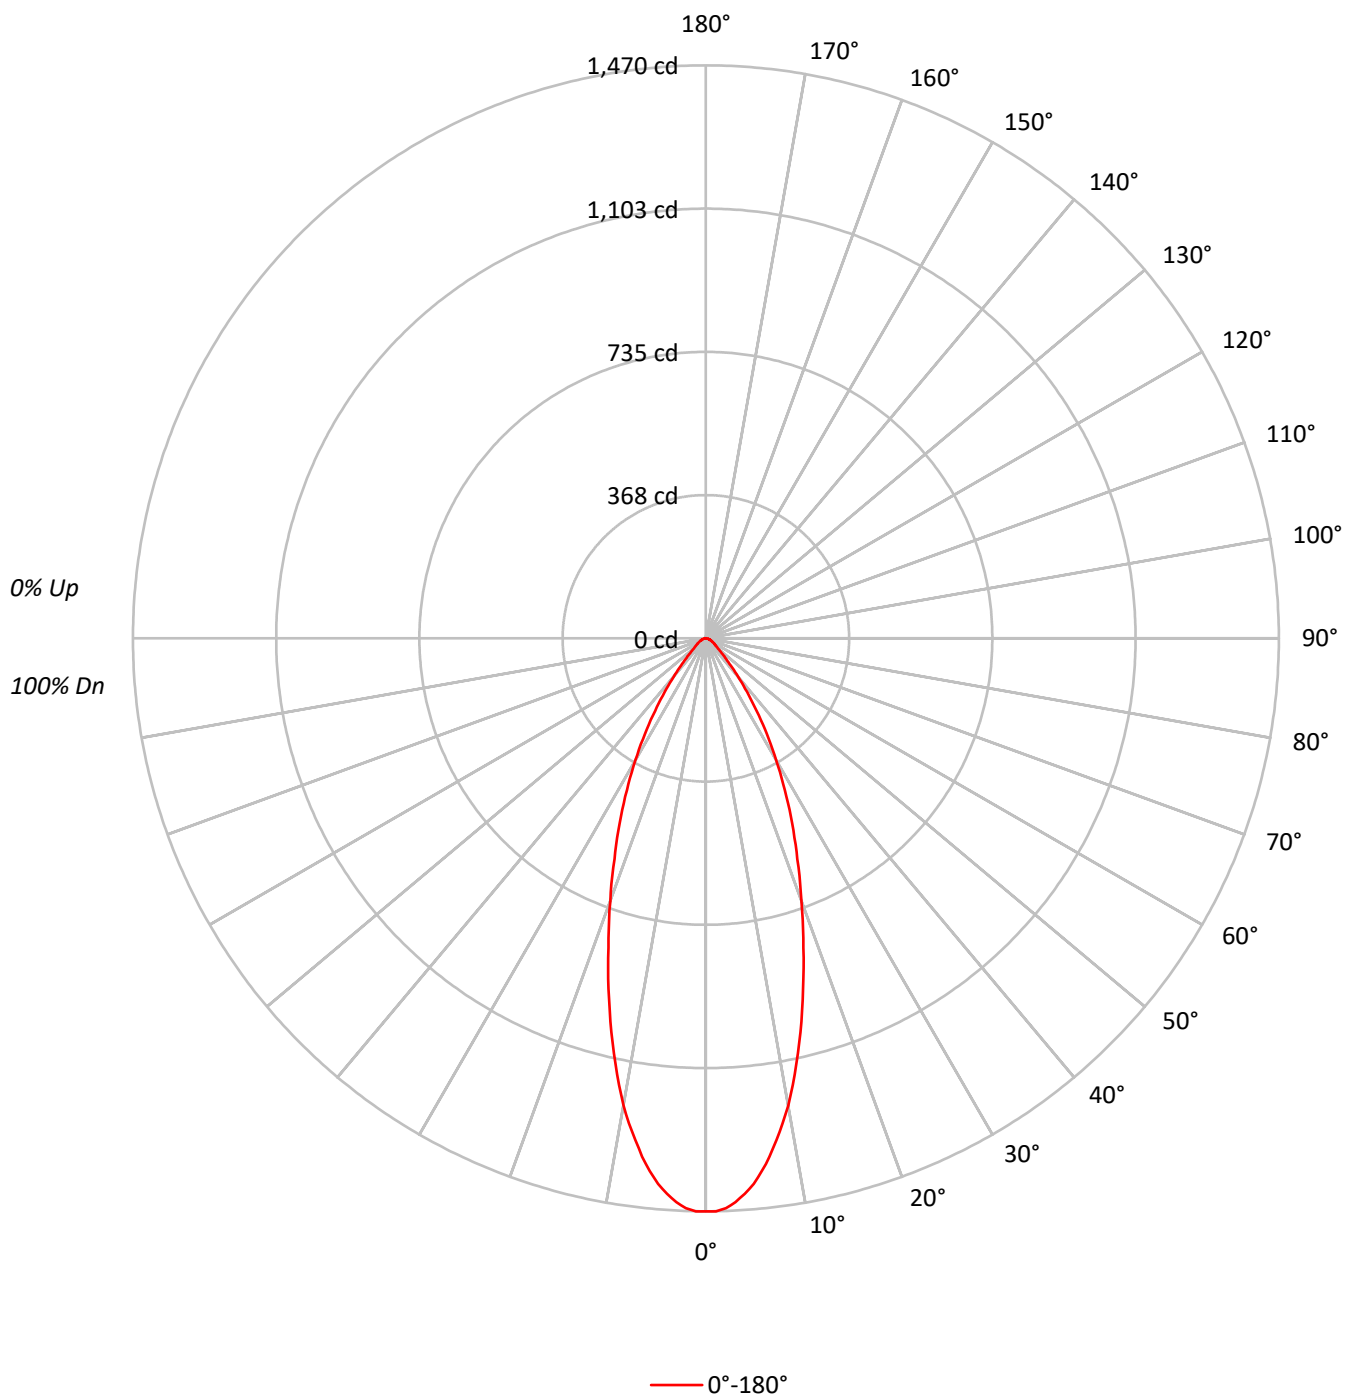

TEST NUMBER: P1257731

CATALOG NUMBER: P3AS17R259040DE010 E3DLP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	95	90	86	100	94	89	86	91	87	84		89	86	83		87
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78
6	88	79	73	69	86	78	72	68	77	72	68		75	71	67		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	65	60	79	70	64	60	69	64	60		68	63	60		67
9	76	67	61	57	75	66	61	57	65	60	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	322386
5°	309310
10°	270959
15°	217799
20°	167338
25°	126612
30°	91482
35°	60766
40°	36840
45°	21460
50°	13680
55°	11125
60°	9736
65°	8613
70°	7117
75°	7032
80°	5304
85°	7045

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 21460 cd/sqm

TEST NUMBER: P1257731

CATALOG NUMBER: P3AS17R259040DE010 E3DLP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.9	14.4
10°-20°	265.3	29.9
20°-30°	239.9	27.0
30°-40°	144.1	16.2
40°-50°	57.2	6.4
50°-60°	26.4	3.0
60°-70°	16.1	1.8
70°-80°	8.6	1.0
80°-90°	2.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	633.1	71.3
0°-40°	777.2	87.5
0°-60°	860.8	96.9
0°-90°	888.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	888.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1470	
5°	1405	128
15°	959	265
25°	523	240
35°	227	144
45°	69	57
55°	29	26
65°	17	16
75°	8	9
85°	3	2
90°	0	

TEST NUMBER: P1257731

CATALOG NUMBER: P3AS17R259040DE010 E3DLP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	1470.2
1°	1470.2
2°	1463.3
3°	1448.1
4°	1428.7
5°	1405.2
6°	1374.7
7°	1340.1
8°	1299.9
9°	1259.8
10°	1216.9
11°	1167.0
12°	1115.8
13°	1064.6
14°	1013.4
15°	959.4
17.5°	832.0
20°	717.1
22.5°	613.3
25°	523.3
27.5°	438.9
30°	361.3
32.5°	290.7
35°	227.0
37.5°	173.0
40°	128.7
42.5°	94.1
45°	69.2
47.5°	52.6
50°	40.1
52.5°	33.2
55°	29.1
57.5°	24.9
60°	22.2
62.5°	18.0
65°	16.6
67.5°	13.8
70°	11.1
72.5°	9.7
75°	8.3
77.5°	6.9
80°	4.2
82.5°	2.8
85°	2.8
87.5°	1.4



TEST NUMBER: P1257731

CATALOG NUMBER: P3AS17R259040DE010 E3DLP1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)