

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257850

Luminaire Tested: P3AS17R459040DE010 E3DLP1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1257850
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R459040DE010 E3DLP1MW
Description: 3in Adjustable LED luminaire with, R45 optic, 4000K CCT AND, 90CRI , E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 999.0 lumens
Efficiency: N/A
Efficacy: 47.1 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1257850

CATALOG NUMBER: P3AS17R459040DE010 E3DLP1MW

Luminous Intensity Polar Plot

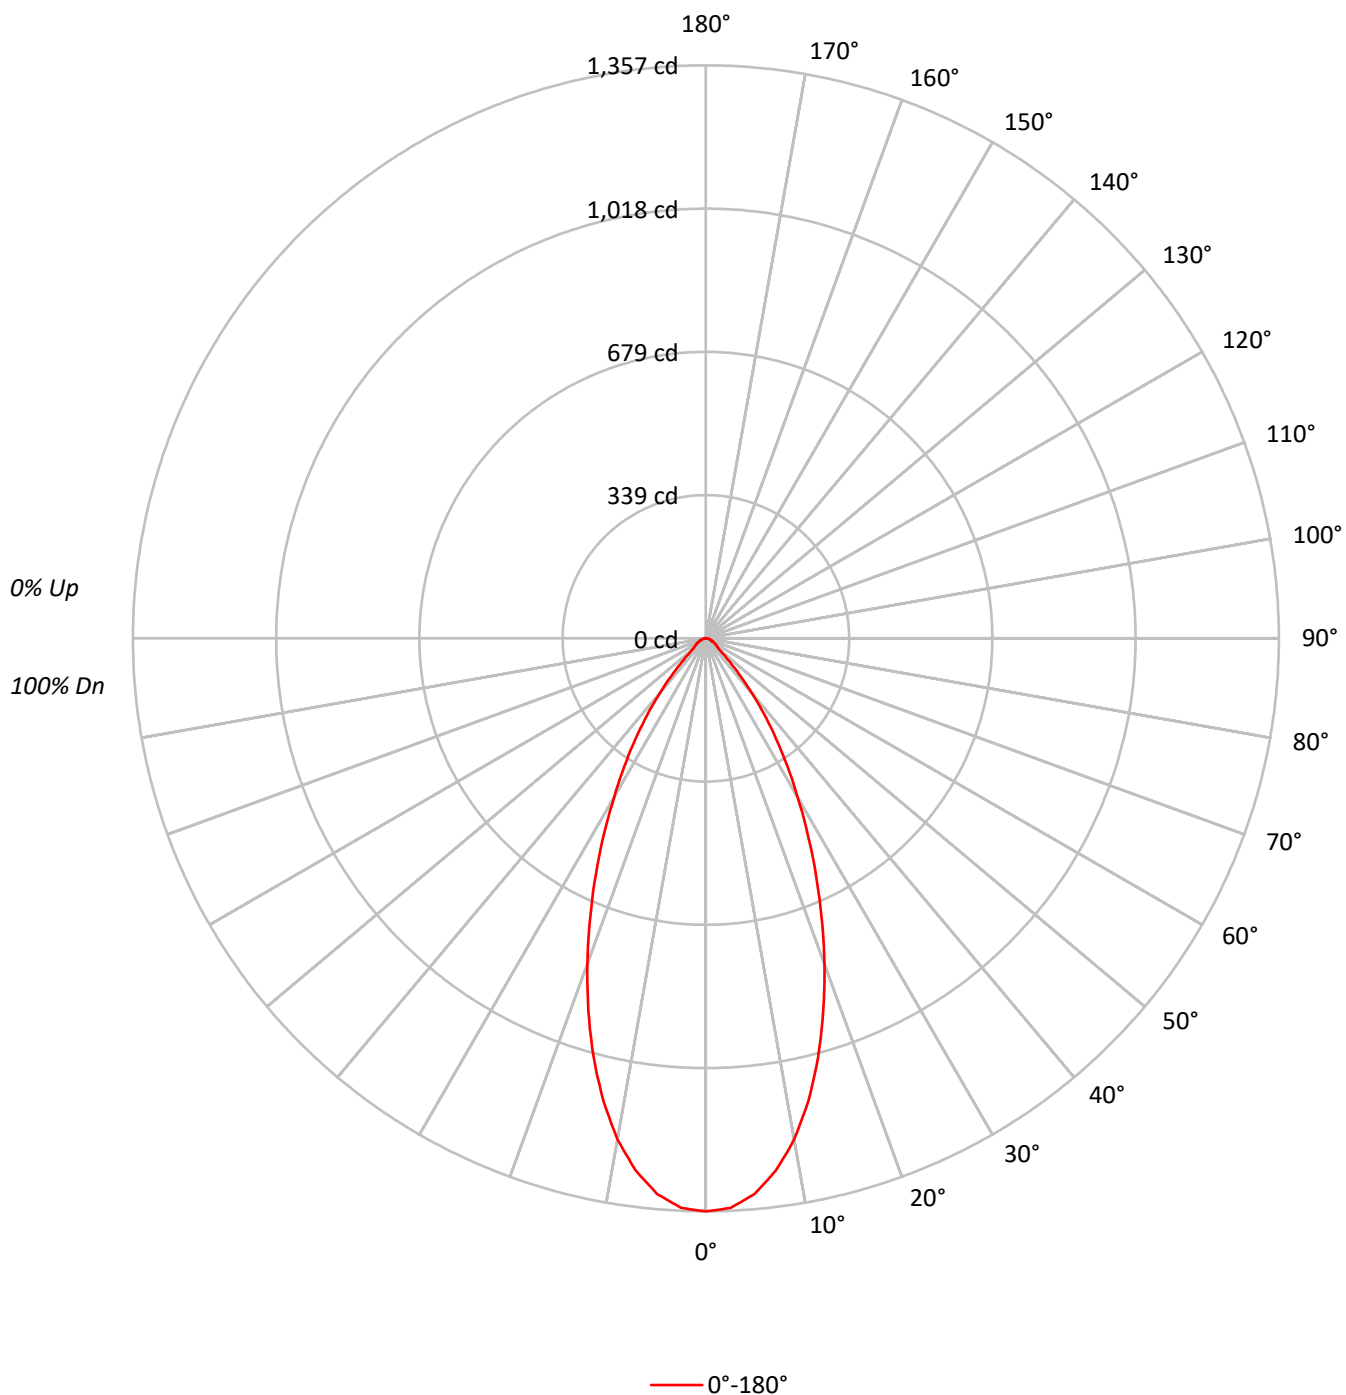

TEST NUMBER: P1257850

CATALOG NUMBER: P3AS17R459040DE010 E3DLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	102	95	90	85	100	93	89	85	91	87	83		88	85	82		86
4	96	88	83	78	94	87	82	78	85	81	77		83	79	76		81
5	91	83	77	72	90	82	76	72	80	75	71		78	74	71		77
6	87	78	72	67	85	77	71	67	75	70	66		74	69	66		73
7	83	73	67	63	81	72	67	63	71	66	62		70	65	62		69
8	79	69	63	59	77	68	63	59	67	62	58		66	62	58		65
9	75	65	59	55	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	61	55	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	297564
5°	290776
10°	268243
15°	233236
20°	191607
25°	149089
30°	110093
35°	77470
40°	48348
45°	26204
50°	14157
55°	12157
60°	10920
65°	9340
70°	8014
75°	8218
80°	6945
85°	7045

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 26204 cd/sqm

TEST NUMBER: P1257850

CATALOG NUMBER: P3AS17R459040DE010 E3DLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.3	12.2
10°-20°	284.0	28.4
20°-30°	282.0	28.2
30°-40°	181.6	18.2
40°-50°	70.0	7.0
50°-60°	28.4	2.8
60°-70°	18.0	1.8
70°-80°	9.7	1.0
80°-90°	3.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	688.3	68.9
0°-40°	869.9	87.1
0°-60°	968.3	96.9
0°-90°	999.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	999.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1357	
5°	1321	122
15°	1027	284
25°	616	282
35°	289	182
45°	84	70
55°	32	28
65°	18	18
75°	10	10
85°	3	3
90°	0	

TEST NUMBER: P1257850

CATALOG NUMBER: P3AS17R459040DE010 E3DLP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1357.0
2.5°	1350.1
5°	1321.0
7.5°	1271.1
10°	1204.7
12.5°	1121.6
15°	1027.4
17.5°	925.0
20°	821.1
22.5°	715.9
25°	616.2
27.5°	522.0
30°	434.8
32.5°	358.6
35°	289.4
37.5°	227.1
40°	168.9
42.5°	121.9
45°	84.5
47.5°	56.8
50°	41.5
52.5°	34.6
55°	31.8
57.5°	27.7
60°	24.9
62.5°	20.8
65°	18.0
67.5°	15.2
70°	12.5
72.5°	11.1
75°	9.7
77.5°	6.9
80°	5.5
82.5°	4.2
85°	2.8
87.5°	1.4
90°	0.0

(END OF REPORT)