

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257884

Luminaire Tested: P3AS17R559040DE010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1257884
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R559040DE010 E3CB1MW
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 90CRI , E3CB1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1843.0 lumens
Efficiency: N/A
Efficacy: 86.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1257884

CATALOG NUMBER: P3AS17R559040DE010 E3CB1MW

Luminous Intensity Polar Plot

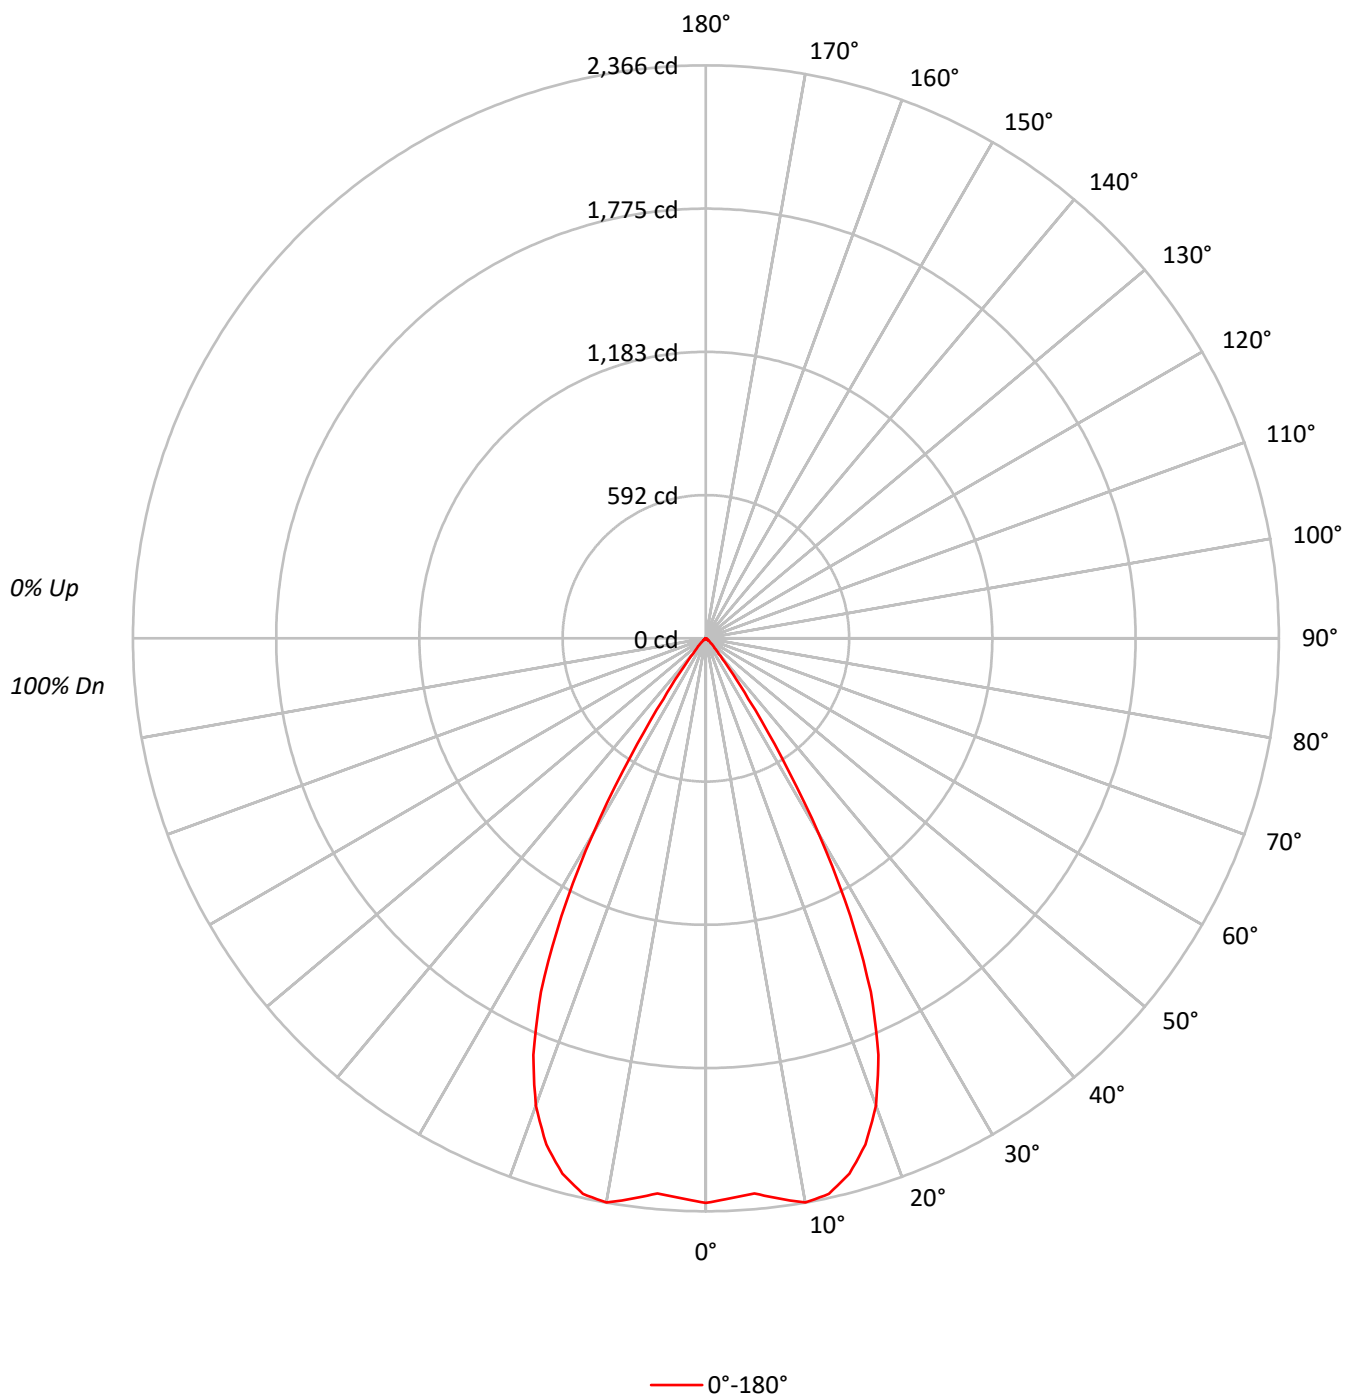

TEST NUMBER: P1257884

CATALOG NUMBER: P3AS17R559040DE010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94		
2	109	104	101	98	107	103	99	96	100	97	94	97	94	92	94	92	90	89		
3	104	98	94	90	102	97	93	89	94	91	88	92	89	86	90	87	85	84		
4	99	92	87	84	98	91	87	83	89	85	82	87	84	81	85	83	80	79		
5	95	87	82	78	93	86	81	78	85	80	77	83	79	76	82	78	76	74		
6	91	83	77	73	89	82	77	73	80	76	72	79	75	72	78	74	72	70		
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66		
8	83	74	69	65	82	74	68	65	73	68	65	72	67	64	71	67	64	63		
9	79	71	65	61	78	70	65	61	69	64	61	68	64	61	68	64	61	60		
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	511165
5°	506404
10°	526755
15°	519458
20°	479005
25°	389756
30°	236720
35°	81941
40°	23387
45°	11164
50°	4742
55°	2103
60°	2412
65°	2179
70°	1795
75°	2372
80°	1768
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 11164 cd/sqm

TEST NUMBER: P1257884

CATALOG NUMBER: P3AS17R559040DE010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	222.4	12.1
10°-20°	635.9	34.5
20°-30°	709.0	38.5
30°-40°	231.9	12.6
40°-50°	30.6	1.7
50°-60°	6.4	0.3
60°-70°	3.8	0.2
70°-80°	2.4	0.1
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1567.3	85.0
0°-40°	1799.3	97.6
0°-60°	1836.3	99.6
0°-90°	1843.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1843.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2331	
5°	2301	222
15°	2288	636
25°	1611	709
35°	306	232
45°	36	31
55°	6	6
65°	4	4
75°	3	2
85°	0	1
90°	0	

TEST NUMBER: P1257884

CATALOG NUMBER: P3AS17R559040DE010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2331.1
2.5°	2314.5
5°	2300.6
7.5°	2333.9
10°	2365.7
12.5°	2349.1
15°	2288.2
17.5°	2191.2
20°	2052.7
22.5°	1861.6
25°	1610.9
27.5°	1292.3
30°	934.9
32.5°	573.4
35°	306.1
37.5°	155.1
40°	81.7
42.5°	52.6
45°	36.0
47.5°	24.9
50°	13.9
52.5°	8.3
55°	5.5
57.5°	5.5
60°	5.5
62.5°	4.2
65°	4.2
67.5°	2.8
70°	2.8
72.5°	2.8
75°	2.8
77.5°	1.4
80°	1.4
82.5°	1.4
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)