

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257899

Luminaire Tested: P3AS17R559040DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1257899
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R559040DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 90CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 575.0 lumens
Efficiency: N/A
Efficacy: 27.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1257899

CATALOG NUMBER: P3AS17R559040DE010 E3DLD1GPH

Luminous Intensity Polar Plot

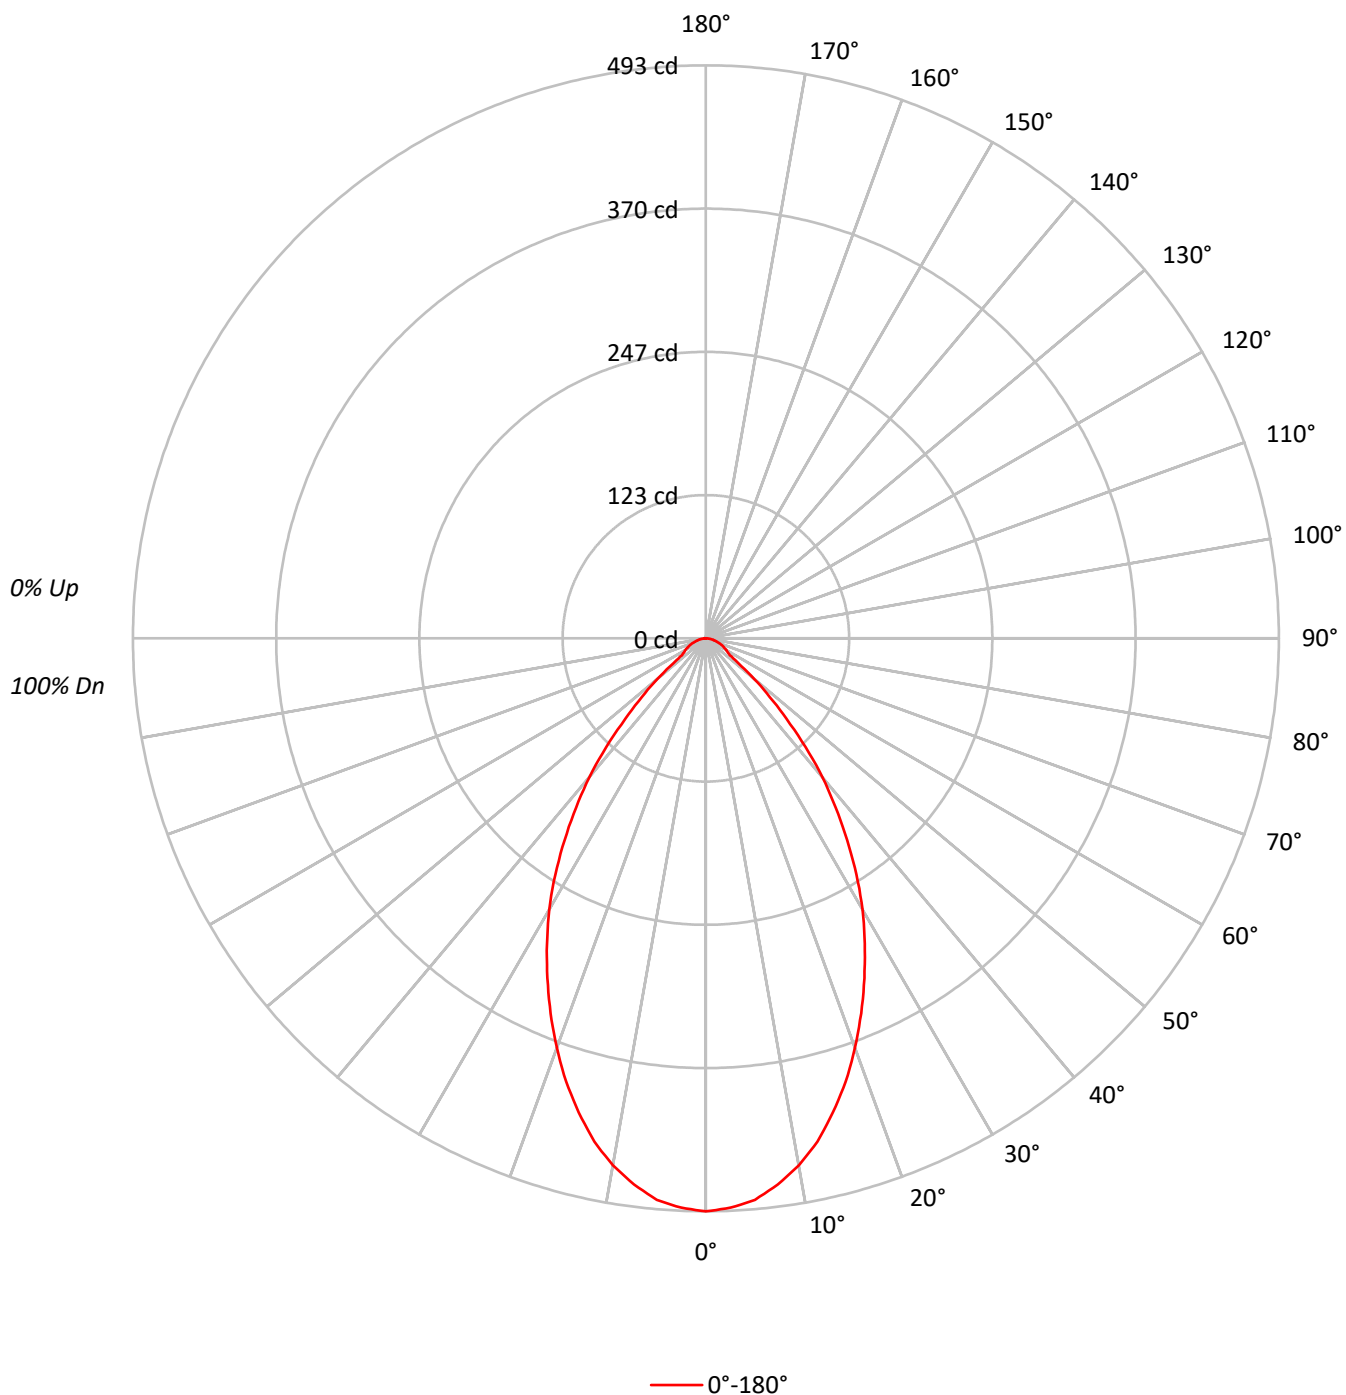

TEST NUMBER: P1257899

CATALOG NUMBER: P3AS17R559040DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95
2	105	100	95	91	103	98	93	90	94	91	88		91	88	86		89
3	99	91	85	81	97	90	84	80	87	82	79		85	81	77		82
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76
5	87	77	71	66	85	76	70	65	75	69	65		73	68	64		71
6	82	72	65	60	80	71	64	60	69	64	59		68	63	59		66
7	77	67	60	55	76	66	59	55	65	59	54		63	58	54		62
8	73	62	55	51	72	62	55	51	60	55	50		59	54	50		58
9	69	58	51	47	68	58	51	47	57	51	47		56	50	46		55
10	65	55	48	44	64	54	48	44	53	47	43		52	47	43		52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	108105
5°	106735
10°	102514
15°	95892
20°	87484
25°	78053
30°	68264
35°	56724
40°	44712
45°	30329
50°	18524
55°	9596
60°	8947
65°	8457
70°	7822
75°	6863
80°	6819
85°	5032

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 30329 cd/sqm

TEST NUMBER: P1257899

CATALOG NUMBER: P3AS17R559040DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	45.5	7.9
10°-20°	118.1	20.5
20°-30°	147.8	25.7
30°-40°	132.0	23.0
40°-50°	77.3	13.4
50°-60°	26.7	4.6
60°-70°	16.1	2.8
70°-80°	8.9	1.6
80°-90°	2.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	311.4	54.2
0°-40°	443.4	77.1
0°-60°	547.3	95.2
0°-90°	575.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	575.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	493	
5°	485	45
15°	422	118
25°	323	148
35°	212	132
45°	98	77
55°	25	27
65°	16	16
75°	8	9
85°	2	3
90°	0	

TEST NUMBER: P1257899

CATALOG NUMBER: P3AS17R559040DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	493.0
2.5°	490.3
5°	484.9
7.5°	474.0
10°	460.4
12.5°	443.5
15°	422.4
17.5°	400.0
20°	374.9
22.5°	349.1
25°	322.6
27.5°	296.1
30°	269.6
32.5°	241.1
35°	211.9
37.5°	183.4
40°	156.2
42.5°	127.0
45°	97.8
47.5°	74.7
50°	54.3
52.5°	35.3
55°	25.1
57.5°	22.4
60°	20.4
62.5°	18.3
65°	16.3
67.5°	14.3
70°	12.2
72.5°	10.2
75°	8.1
77.5°	6.8
80°	5.4
82.5°	3.4
85°	2.0
87.5°	1.4
90°	0.0

(END OF REPORT)