

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257935

Luminaire Tested: P3AS17R609040DE010 E3DLP1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1257935
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R609040DE010 E3DLP1H
Description: 3in Adjustable LED luminaire with, R60 optic, 4000K CCT AND, 90CRI , E3DLP1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1007.0 lumens
Efficiency: N/A
Efficacy: 47.5 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1257935

CATALOG NUMBER: P3AS17R609040DE010 E3DLP1H

Luminous Intensity Polar Plot

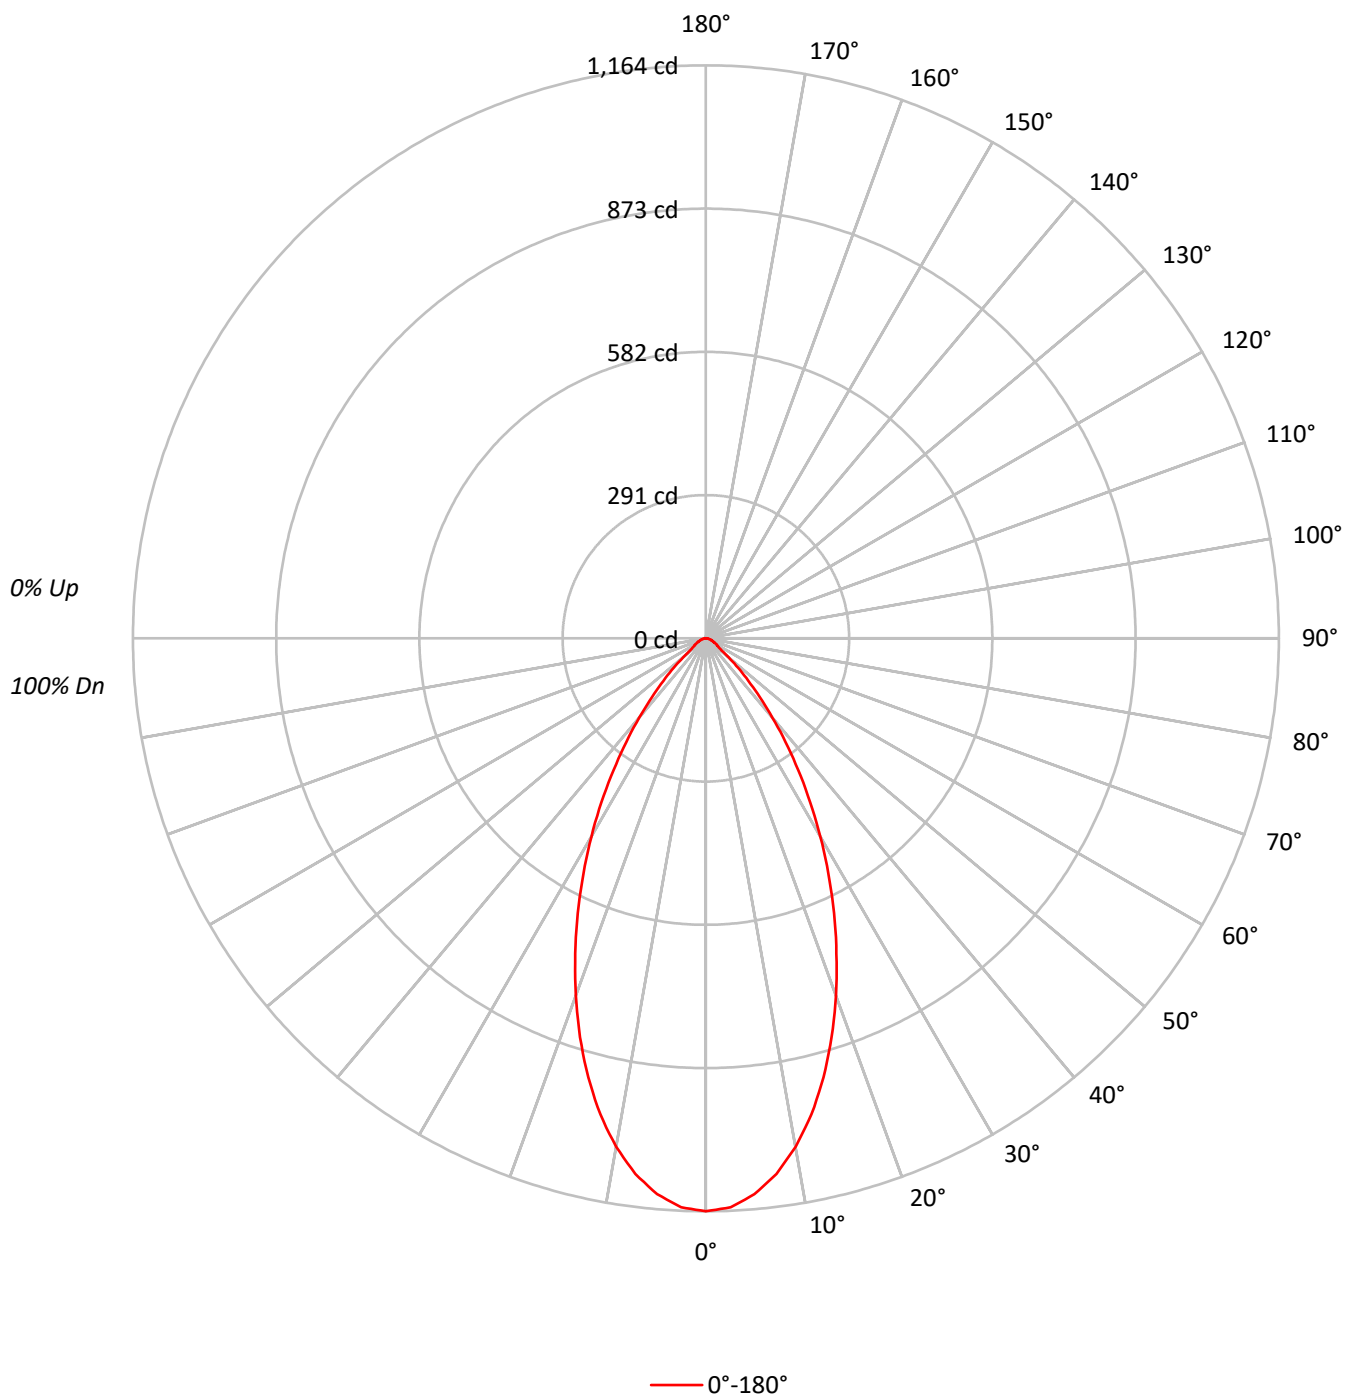

TEST NUMBER: P1257935

CATALOG NUMBER: P3AS17R609040DE010 E3DLP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	77	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	60	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		60
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	255199
5°	249482
10°	233574
15°	209536
20°	180196
25°	148992
30°	117740
35°	87428
40°	60198
45°	37771
50°	20775
55°	12157
60°	10920
65°	9340
70°	8014
75°	8218
80°	6945
85°	7045

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 37771 cd/sqm

TEST NUMBER: P1257935

CATALOG NUMBER: P3AS17R609040DE010 E3DLP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.5	10.5
10°-20°	256.3	25.5
20°-30°	281.2	27.9
30°-40°	204.9	20.3
40°-50°	96.8	9.6
50°-60°	31.7	3.1
60°-70°	18.0	1.8
70°-80°	9.7	1.0
80°-90°	3.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	643.0	63.9
0°-40°	847.9	84.2
0°-60°	976.4	97.0
0°-90°	1007.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1007.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1164	
5°	1133	106
15°	923	256
25°	616	281
35°	327	205
45°	122	97
55°	32	32
65°	18	18
75°	10	10
85°	3	3
90°	0	

TEST NUMBER: P1257935

CATALOG NUMBER: P3AS17R609040DE010 E3DLP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	1163.8
2.5°	1156.9
5°	1133.4
7.5°	1097.4
10°	1049.0
12.5°	990.8
15°	923.0
17.5°	849.7
20°	772.2
22.5°	693.3
25°	615.8
27.5°	538.3
30°	465.0
32.5°	394.4
35°	326.6
37.5°	265.7
40°	210.3
42.5°	161.9
45°	121.8
47.5°	88.6
50°	60.9
52.5°	40.1
55°	31.8
57.5°	27.7
60°	24.9
62.5°	20.8
65°	18.0
67.5°	15.2
70°	12.5
72.5°	11.1
75°	9.7
77.5°	6.9
80°	5.5
82.5°	4.2
85°	2.8
87.5°	1.4
90°	0.0

(END OF REPORT)