

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1257962

Luminaire Tested: P3AS17R659040DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1257962
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R659040DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 4000K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1091.0 lumens
Efficiency: N/A
Efficacy: 51.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1257962

CATALOG NUMBER: P3AS17R659040DE010 E3DLD1WMH

Luminous Intensity Polar Plot

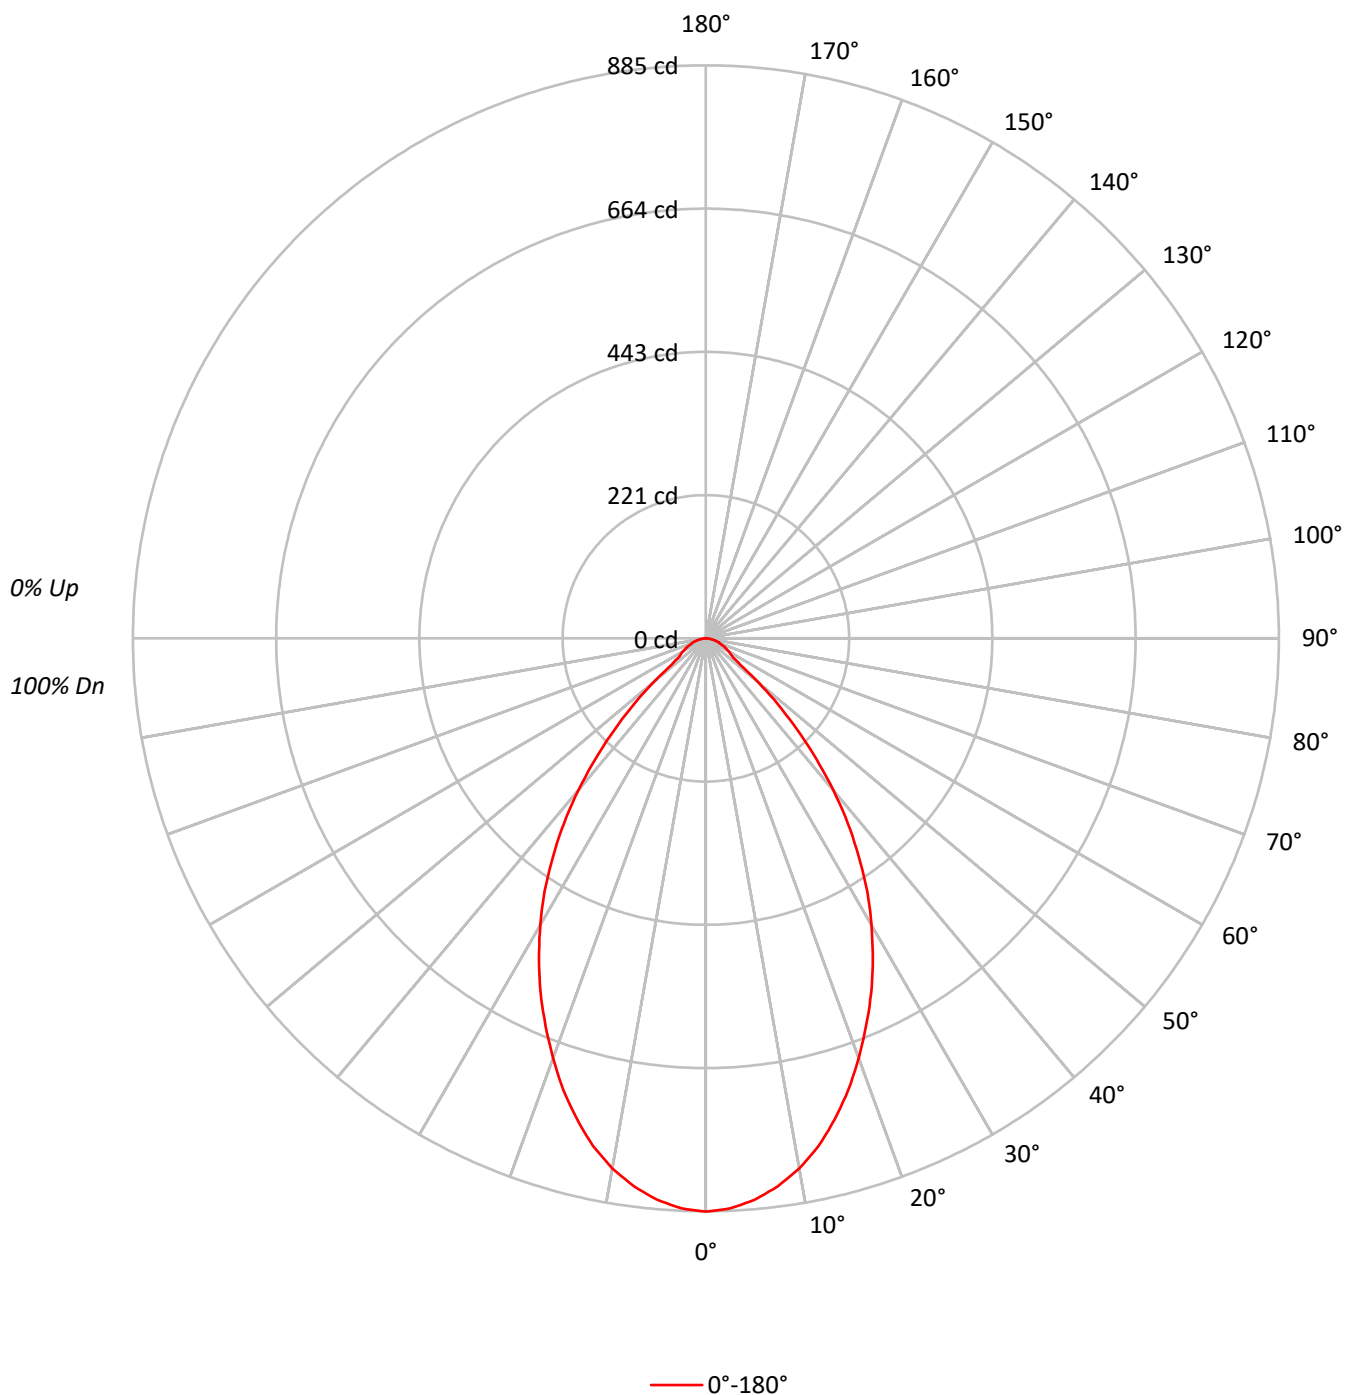

TEST NUMBER: P1257962

CATALOG NUMBER: P3AS17R659040DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	194151
5°	191525
10°	185100
15°	174575
20°	161014
25°	146162
30°	129463
35°	110155
40°	87650
45°	61867
50°	35922
55°	19612
60°	18244
65°	16552
70°	15131
75°	14064
80°	12249
85°	10567

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 61867 cd/sqm

TEST NUMBER: P1257962

CATALOG NUMBER: P3AS17R659040DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.8	7.5
10°-20°	215.1	19.7
20°-30°	276.5	25.3
30°-40°	255.8	23.4
40°-50°	154.4	14.2
50°-60°	52.7	4.8
60°-70°	31.7	2.9
70°-80°	17.9	1.6
80°-90°	5.1	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	573.5	52.6
0°-40°	829.2	76.0
0°-60°	1036.3	95.0
0°-90°	1091.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1091.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	885	
5°	870	82
15°	769	215
25°	604	276
35°	412	256
45°	200	154
55°	51	53
65°	32	32
75°	17	18
85°	4	5
90°	0	

TEST NUMBER: P1257962

CATALOG NUMBER: P3AS17R659040DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	885.4
2.5°	881.2
5°	870.1
7.5°	853.5
10°	831.3
12.5°	803.6
15°	769.0
17.5°	731.6
20°	690.0
22.5°	647.1
25°	604.1
27.5°	558.4
30°	511.3
32.5°	464.2
35°	411.5
37.5°	360.3
40°	306.2
42.5°	252.2
45°	199.5
47.5°	151.0
50°	105.3
52.5°	66.5
55°	51.3
57.5°	45.7
60°	41.6
62.5°	36.0
65°	31.9
67.5°	27.7
70°	23.6
72.5°	20.8
75°	16.6
77.5°	13.9
80°	9.7
82.5°	6.9
85°	4.2
87.5°	2.8
90°	0.0

(END OF REPORT)