

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1258060

Luminaire Tested: P3AS20R259040D010 E3D1MW

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1258060  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS20R259040D010 E3D1MW  
Description: 3in Adjustable LED luminaire with, R25 optic, 4000K CCT AND, 90CRI , E3D1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2314.0 lumens  
Efficiency: N/A  
Efficacy: 80.3 lumens/watt  
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1258060  
CATALOG NUMBER: P3AS20R259040D010 E3D1MW

### Luminous Intensity Polar Plot

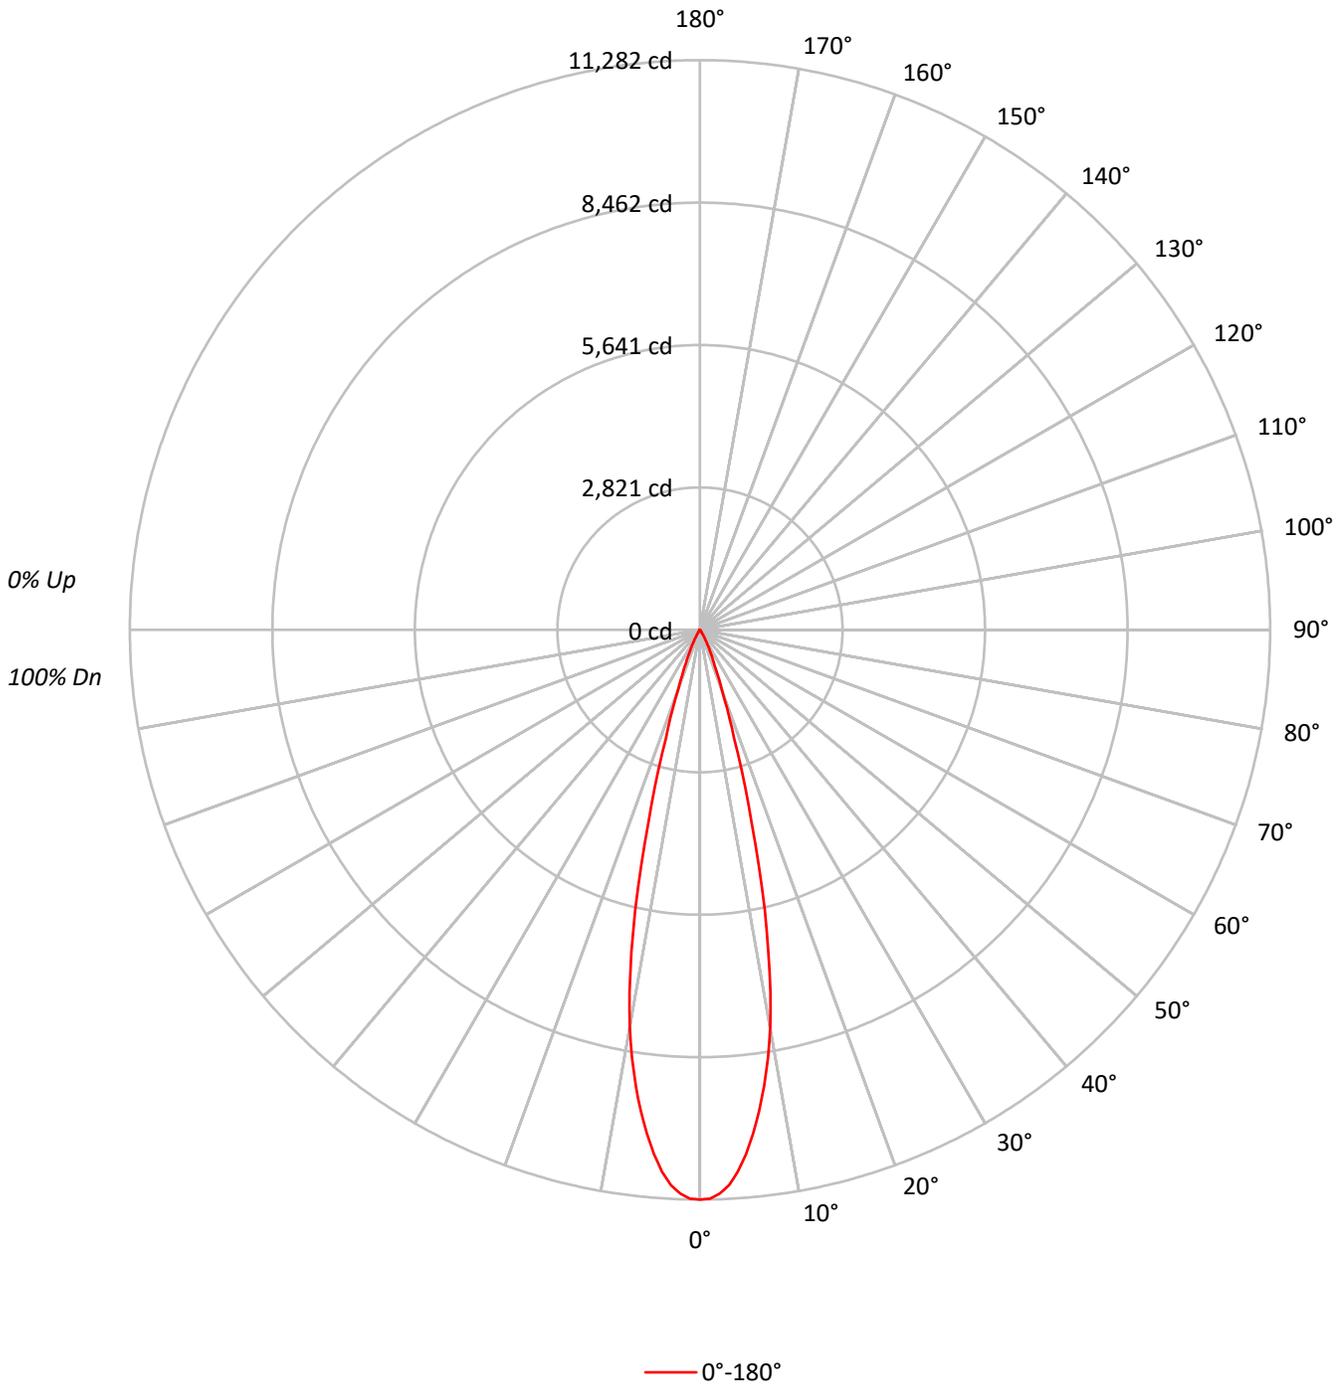



TEST NUMBER: P1258060  
 CATALOG NUMBER: P3AS20R259040D010 E3D1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99	100
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	97	97	97
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	96	96	96	94
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	85	85	85
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	83	83	83
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	81	81	81
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	79	79	79
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2474012
5°	2294579
10°	1779482
15°	892287
20°	293139
25°	116571
30°	43728
35°	12662
40°	5725
45°	2264
50°	1876
55°	1376
60°	1579
65°	1868
70°	1154
75°	1525
80°	2273
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 80°  
 Luminance: 2273 cd/sqm



TEST NUMBER: P1258060  
 CATALOG NUMBER: P3AS20R259040D010 E3D1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	916.9	39.6
10°-20°	1093.9	47.3
20°-30°	246.6	10.7
30°-40°	40.0	1.7
40°-50°	7.3	0.3
50°-60°	3.8	0.2
60°-70°	3.3	0.1
70°-80°	1.9	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2257.4	97.6
0°-40°	2297.4	99.3
0°-60°	2308.5	99.8
0°-90°	2314.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2314.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	11282	
5°	10424	917
15°	3930	1094
25°	482	247
35°	47	40
45°	7	7
55°	4	4
65°	4	3
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P1258060  
CATALOG NUMBER: P3AS20R259040D010 E3D1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	11282.4
1°	11264.2
2°	11173.3
3°	11006.0
4°	10753.3
5°	10424.3
6°	10031.6
7°	9606.2
8°	9119.0
9°	8586.3
10°	7991.8
11°	7306.4
12°	6517.4
13°	5692.1
14°	4806.7
15°	3930.5
17.5°	2239.7
20°	1256.2
22.5°	758.1
25°	481.8
27.5°	296.3
30°	172.7
32.5°	90.9
35°	47.3
37.5°	30.9
40°	20.0
42.5°	12.7
45°	7.3
47.5°	5.5
50°	5.5
52.5°	5.5
55°	3.6
57.5°	3.6
60°	3.6
62.5°	3.6
65°	3.6
67.5°	3.6
70°	1.8
72.5°	1.8
75°	1.8
77.5°	1.8
80°	1.8
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1258060  
CATALOG NUMBER: P3AS20R259040D010 E3D1MW

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)