

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1258238

Luminaire Tested: P3AS20R559040D010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1258238
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R559040D010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R55 optic, 4000K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 971.0 lumens
Efficiency: N/A
Efficacy: 33.7 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1258238

CATALOG NUMBER: P3AS20R559040D010 E3DL1GPH

Luminous Intensity Polar Plot

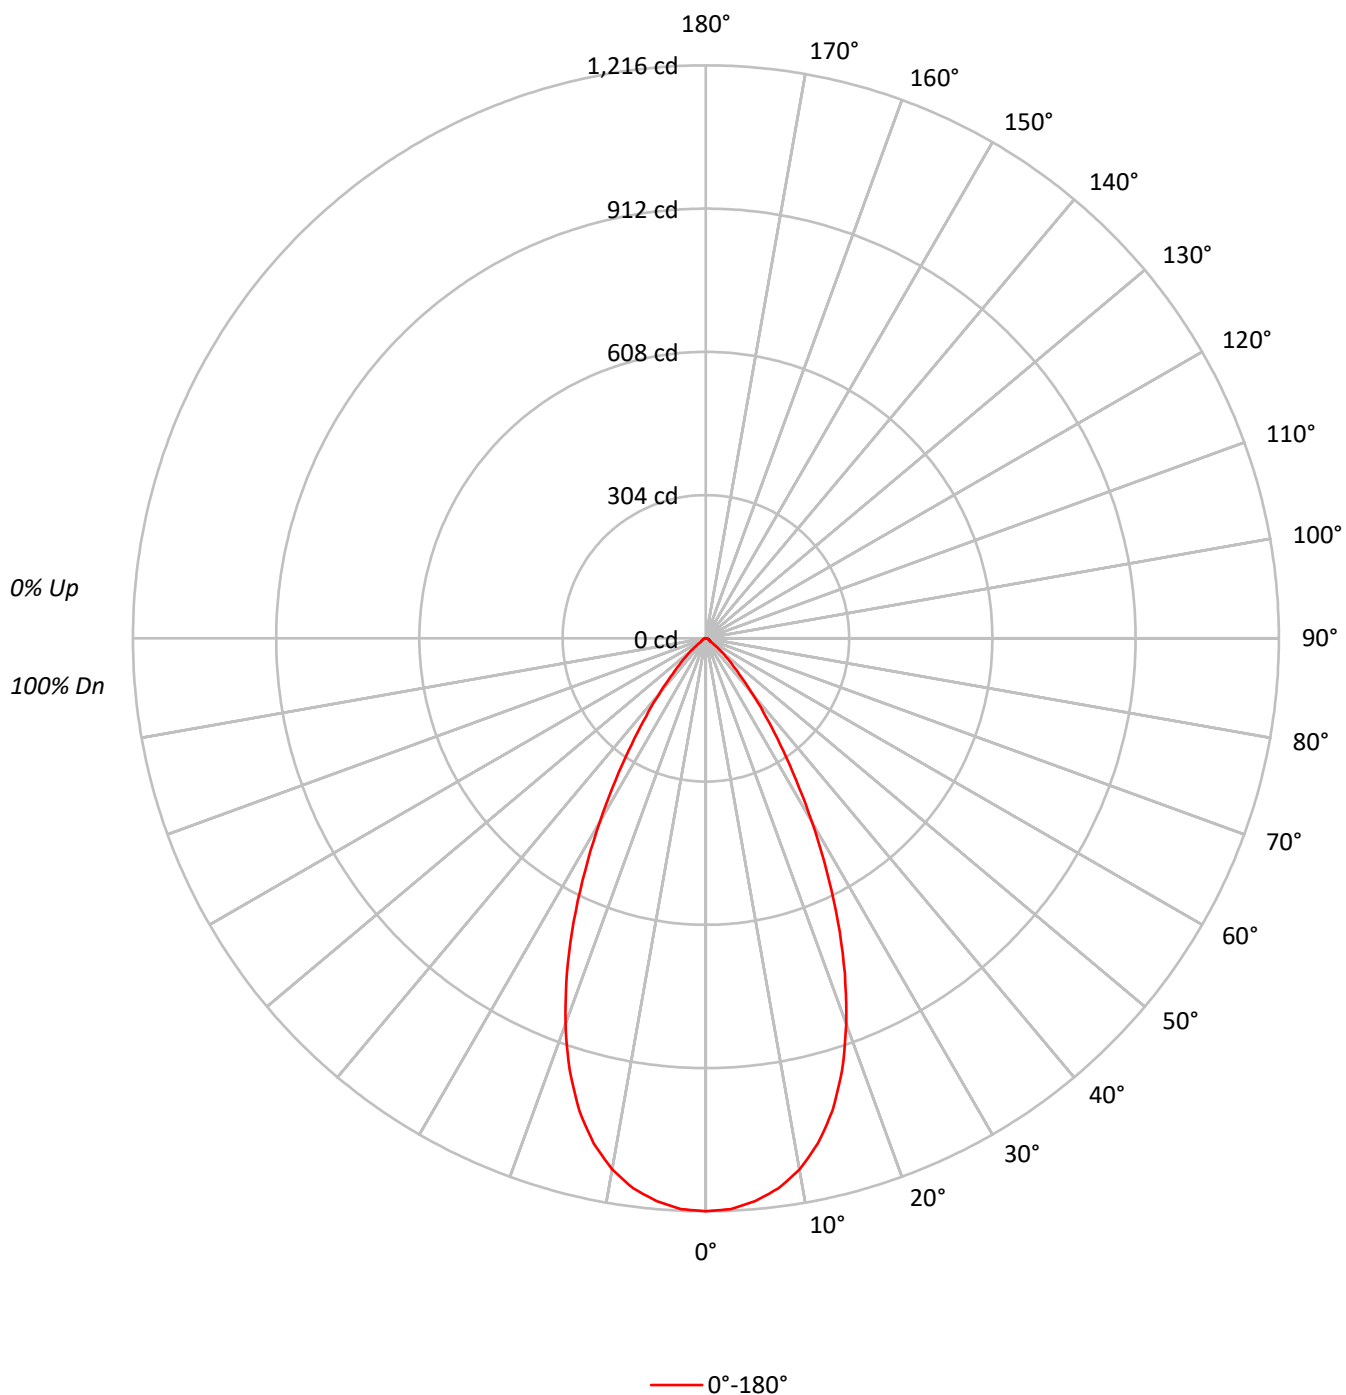

TEST NUMBER: P1258238

CATALOG NUMBER: P3AS20R559040D010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92
3	102	96	91	87	100	94	90	86	92	88	85		89	86	83		87
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		82
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78
6	88	79	73	69	86	78	73	68	77	72	68		75	71	68		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63
10	73	63	57	53	72	62	57	53	62	57	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	266623
5°	263922
10°	254883
15°	235597
20°	203298
25°	160558
30°	113891
35°	73455
40°	44111
45°	24871
50°	13373
55°	4779
60°	4298
65°	4151
70°	3975
75°	3813
80°	3410
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24871 cd/sqm

TEST NUMBER: P1258238

CATALOG NUMBER: P3AS20R559040D010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.8	11.6
10°-20°	287.0	29.6
20°-30°	300.7	31.0
30°-40°	175.4	18.1
40°-50°	65.7	6.8
50°-60°	15.5	1.6
60°-70°	7.9	0.8
70°-80°	4.7	0.5
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	700.5	72.1
0°-40°	875.9	90.2
0°-60°	957.1	98.6
0°-90°	971.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	971.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1216	
5°	1199	113
15°	1038	287
25°	664	301
35°	274	175
45°	80	66
55°	12	15
65°	8	8
75°	4	5
85°	1	1
90°	0	

TEST NUMBER: P1258238

CATALOG NUMBER: P3AS20R559040D010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1215.9
2.5°	1212.4
5°	1199.0
7.5°	1177.6
10°	1144.7
12.5°	1098.3
15°	1037.8
17.5°	961.2
20°	871.2
22.5°	770.5
25°	663.6
27.5°	554.1
30°	449.8
32.5°	355.4
35°	274.4
37.5°	208.4
40°	154.1
42.5°	110.5
45°	80.2
47.5°	57.9
50°	39.2
52.5°	22.3
55°	12.5
57.5°	10.7
60°	9.8
62.5°	8.9
65°	8.0
67.5°	7.1
70°	6.2
72.5°	5.3
75°	4.5
77.5°	3.6
80°	2.7
82.5°	1.8
85°	0.9
87.5°	0.9
90°	0.0

(END OF REPORT)