

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1258278

Luminaire Tested: P3AS20R609040D010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1258278
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R609040D010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R60 optic, 4000K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1499.0 lumens
Efficiency: N/A
Efficacy: 52.0 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1258278

CATALOG NUMBER: P3AS20R609040D010 E3DLD1WMH

Luminous Intensity Polar Plot

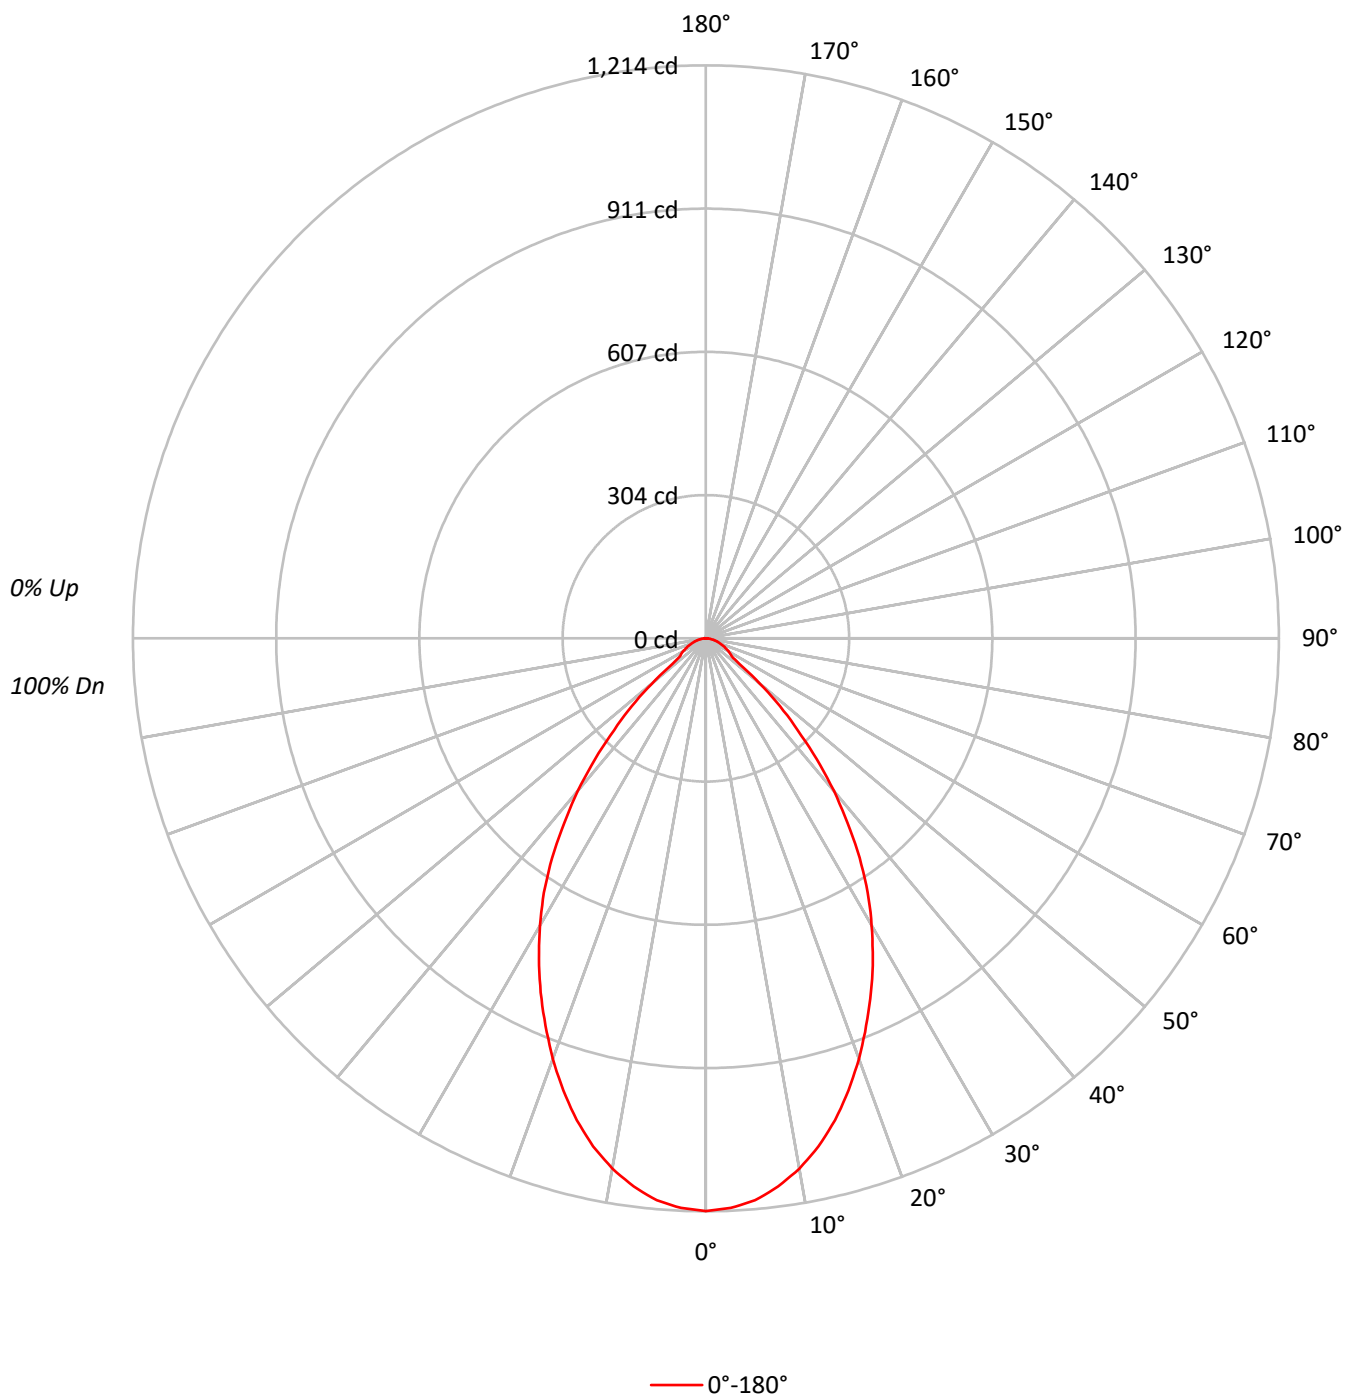

TEST NUMBER: P1258278

CATALOG NUMBER: P3AS20R609040D010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	266097
5°	263107
10°	253992
15°	239956
20°	221196
25°	200286
30°	177825
35°	151942
40°	120826
45°	85187
50°	50898
55°	25729
60°	24735
65°	22674
70°	20965
75°	20079
80°	18437
85°	13838

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 85187 cd/sqm

TEST NUMBER: P1258278

CATALOG NUMBER: P3AS20R609040D010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.3	7.5
10°-20°	295.4	19.7
20°-30°	379.3	25.3
30°-40°	351.7	23.5
40°-50°	214.1	14.3
50°-60°	71.3	4.8
60°-70°	43.4	2.9
70°-80°	24.5	1.6
80°-90°	6.9	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	787.0	52.5
0°-40°	1138.7	76.0
0°-60°	1424.2	95.0
0°-90°	1499.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1499.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1214	
5°	1195	112
15°	1057	295
25°	828	379
35°	568	352
45°	275	214
55°	67	71
65°	44	43
75°	24	24
85°	6	7
90°	0	

TEST NUMBER: P1258278

CATALOG NUMBER: P3AS20R609040D010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1213.5
2.5°	1208.0
5°	1195.3
7.5°	1171.6
10°	1140.7
12.5°	1102.5
15°	1057.0
17.5°	1004.3
20°	947.9
22.5°	887.8
25°	827.8
27.5°	765.9
30°	702.3
32.5°	638.6
35°	567.6
37.5°	493.0
40°	422.1
42.5°	347.5
45°	274.7
47.5°	212.9
50°	149.2
52.5°	89.1
55°	67.3
57.5°	61.9
60°	56.4
62.5°	49.1
65°	43.7
67.5°	38.2
70°	32.7
72.5°	27.3
75°	23.7
77.5°	18.2
80°	14.6
82.5°	9.1
85°	5.5
87.5°	3.6
90°	0.0

(END OF REPORT)