

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1258304

Luminaire Tested: P3AS20R659040D010 E3DLD1LI

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1258304  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS20R659040D010 E3DLD1LI  
Description: 3in Adjustable LED luminaire with, R65 optic, 4000K CCT AND, 90CRI , E3DLD1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1432.0 lumens  
Efficiency: N/A  
Efficacy: 49.7 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1258304

CATALOG NUMBER: P3AS20R659040D010 E3DLD1LI

### Luminous Intensity Polar Plot

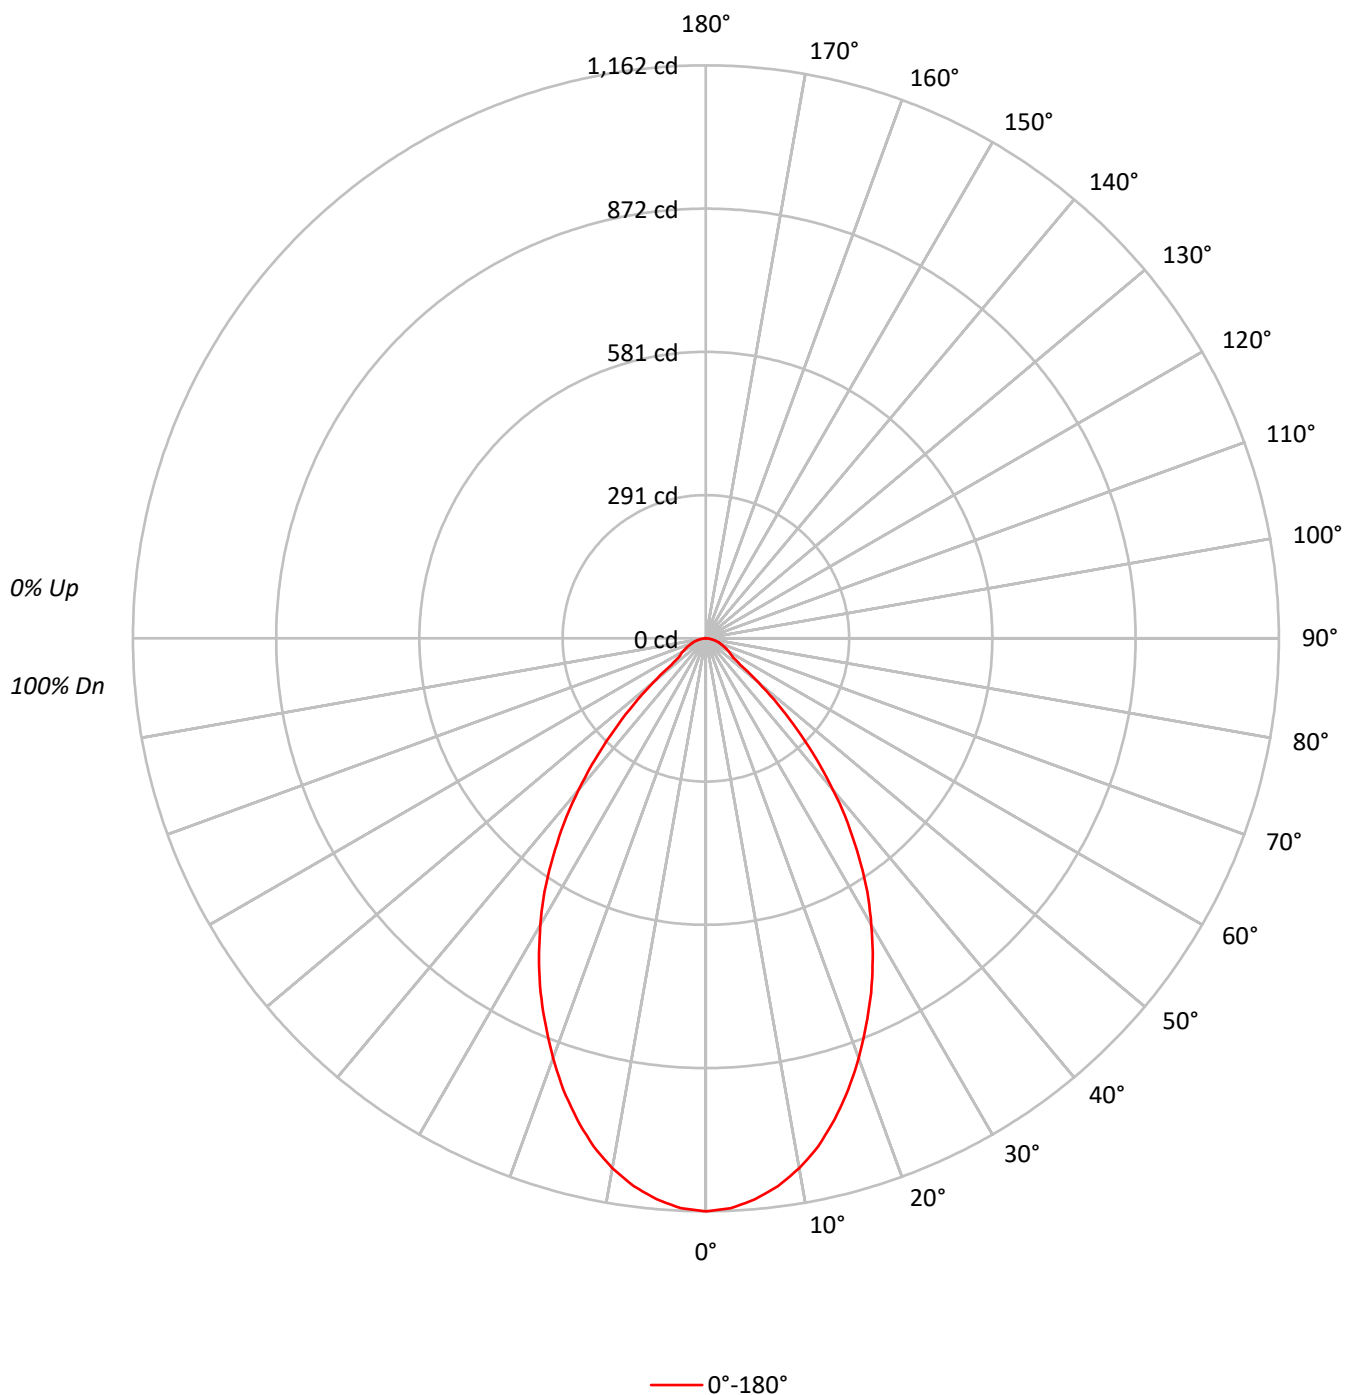

TEST NUMBER: P1258304

CATALOG NUMBER: P3AS20R659040D010 E3DLD1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 101 | 102 | 100 | 98  |  | 99  | 97  | 95  |  | 95  |
| 2   | 105 | 99  | 94  | 90  | 103 | 97  | 93  | 89  | 94  | 90  | 87  |  | 91  | 88  | 85  |  | 88  |
| 3   | 99  | 91  | 85  | 80  | 96  | 89  | 84  | 79  | 87  | 82  | 78  |  | 84  | 80  | 77  |  | 82  |
| 4   | 92  | 83  | 77  | 72  | 90  | 82  | 76  | 71  | 80  | 75  | 70  |  | 78  | 73  | 70  |  | 76  |
| 5   | 87  | 77  | 70  | 65  | 85  | 76  | 69  | 65  | 74  | 68  | 64  |  | 72  | 67  | 63  |  | 71  |
| 6   | 82  | 71  | 64  | 59  | 80  | 70  | 64  | 59  | 69  | 63  | 58  |  | 67  | 62  | 58  |  | 66  |
| 7   | 77  | 66  | 59  | 54  | 75  | 65  | 59  | 54  | 64  | 58  | 54  |  | 63  | 57  | 53  |  | 61  |
| 8   | 72  | 61  | 55  | 50  | 71  | 61  | 54  | 50  | 60  | 54  | 49  |  | 59  | 53  | 49  |  | 58  |
| 9   | 68  | 57  | 51  | 46  | 67  | 57  | 50  | 46  | 56  | 50  | 46  |  | 55  | 49  | 46  |  | 54  |
| 10  | 65  | 54  | 47  | 43  | 64  | 53  | 47  | 43  | 52  | 47  | 43  |  | 52  | 46  | 42  |  | 51  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 254826 |
| 5°  | 251397 |
| 10° | 242970 |
| 15° | 229150 |
| 20° | 211348 |
| 25° | 191842 |
| 30° | 169925 |
| 35° | 144581 |
| 40° | 115044 |
| 45° | 81218  |
| 50° | 47146  |
| 55° | 25729  |
| 60° | 23945  |
| 65° | 21688  |
| 70° | 19811  |
| 75° | 18470  |
| 80° | 16037  |
| 85° | 13838  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 81218 cd/sqm

TEST NUMBER: P1258304

CATALOG NUMBER: P3AS20R659040D010 E3DLD1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 107.4  | 7.5       |
| 10°-20°   | 282.4  | 19.7      |
| 20°-30°   | 362.9  | 25.3      |
| 30°-40°   | 335.7  | 23.4      |
| 40°-50°   | 202.7  | 14.2      |
| 50°-60°   | 69.1   | 4.8       |
| 60°-70°   | 41.6   | 2.9       |
| 70°-80°   | 23.5   | 1.6       |
| 80°-90°   | 6.7    | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 752.7  | 52.6      |
| 0°-40°    | 1088.4 | 76.0      |
| 0°-60°    | 1360.2 | 95.0      |
| 0°-90°    | 1432.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1432.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1162 |      |
| 5°  | 1142 | 107  |
| 15° | 1009 | 282  |
| 25° | 793  | 363  |
| 35° | 540  | 336  |
| 45° | 262  | 203  |
| 55° | 67   | 69   |
| 65° | 42   | 42   |
| 75° | 22   | 23   |
| 85° | 6    | 7    |
| 90° | 0    |      |

TEST NUMBER: P1258304

CATALOG NUMBER: P3AS20R659040D010 E3DLD1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1162.1 |
| 2.5°  | 1156.7 |
| 5°    | 1142.1 |
| 7.5°  | 1120.3 |
| 10°   | 1091.2 |
| 12.5° | 1054.8 |
| 15°   | 1009.4 |
| 17.5° | 960.3  |
| 20°   | 905.7  |
| 22.5° | 849.3  |
| 25°   | 792.9  |
| 27.5° | 732.9  |
| 30°   | 671.1  |
| 32.5° | 609.2  |
| 35°   | 540.1  |
| 37.5° | 472.9  |
| 40°   | 401.9  |
| 42.5° | 331.0  |
| 45°   | 261.9  |
| 47.5° | 198.2  |
| 50°   | 138.2  |
| 52.5° | 87.3   |
| 55°   | 67.3   |
| 57.5° | 60.0   |
| 60°   | 54.6   |
| 62.5° | 47.3   |
| 65°   | 41.8   |
| 67.5° | 36.4   |
| 70°   | 30.9   |
| 72.5° | 27.3   |
| 75°   | 21.8   |
| 77.5° | 18.2   |
| 80°   | 12.7   |
| 82.5° | 9.1    |
| 85°   | 5.5    |
| 87.5° | 3.6    |
| 90°   | 0.0    |

(END OF REPORT)