

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1258397

Luminaire Tested: P3AS24R259040D010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1258397
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R259040D010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R25 optic, 4000K CCT AND, 90CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2644.1 lumens
Efficiency: N/A
Efficacy: 91.8 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1258397

CATALOG NUMBER: P3AS24R259040D010 E3CB1MB

Luminous Intensity Polar Plot

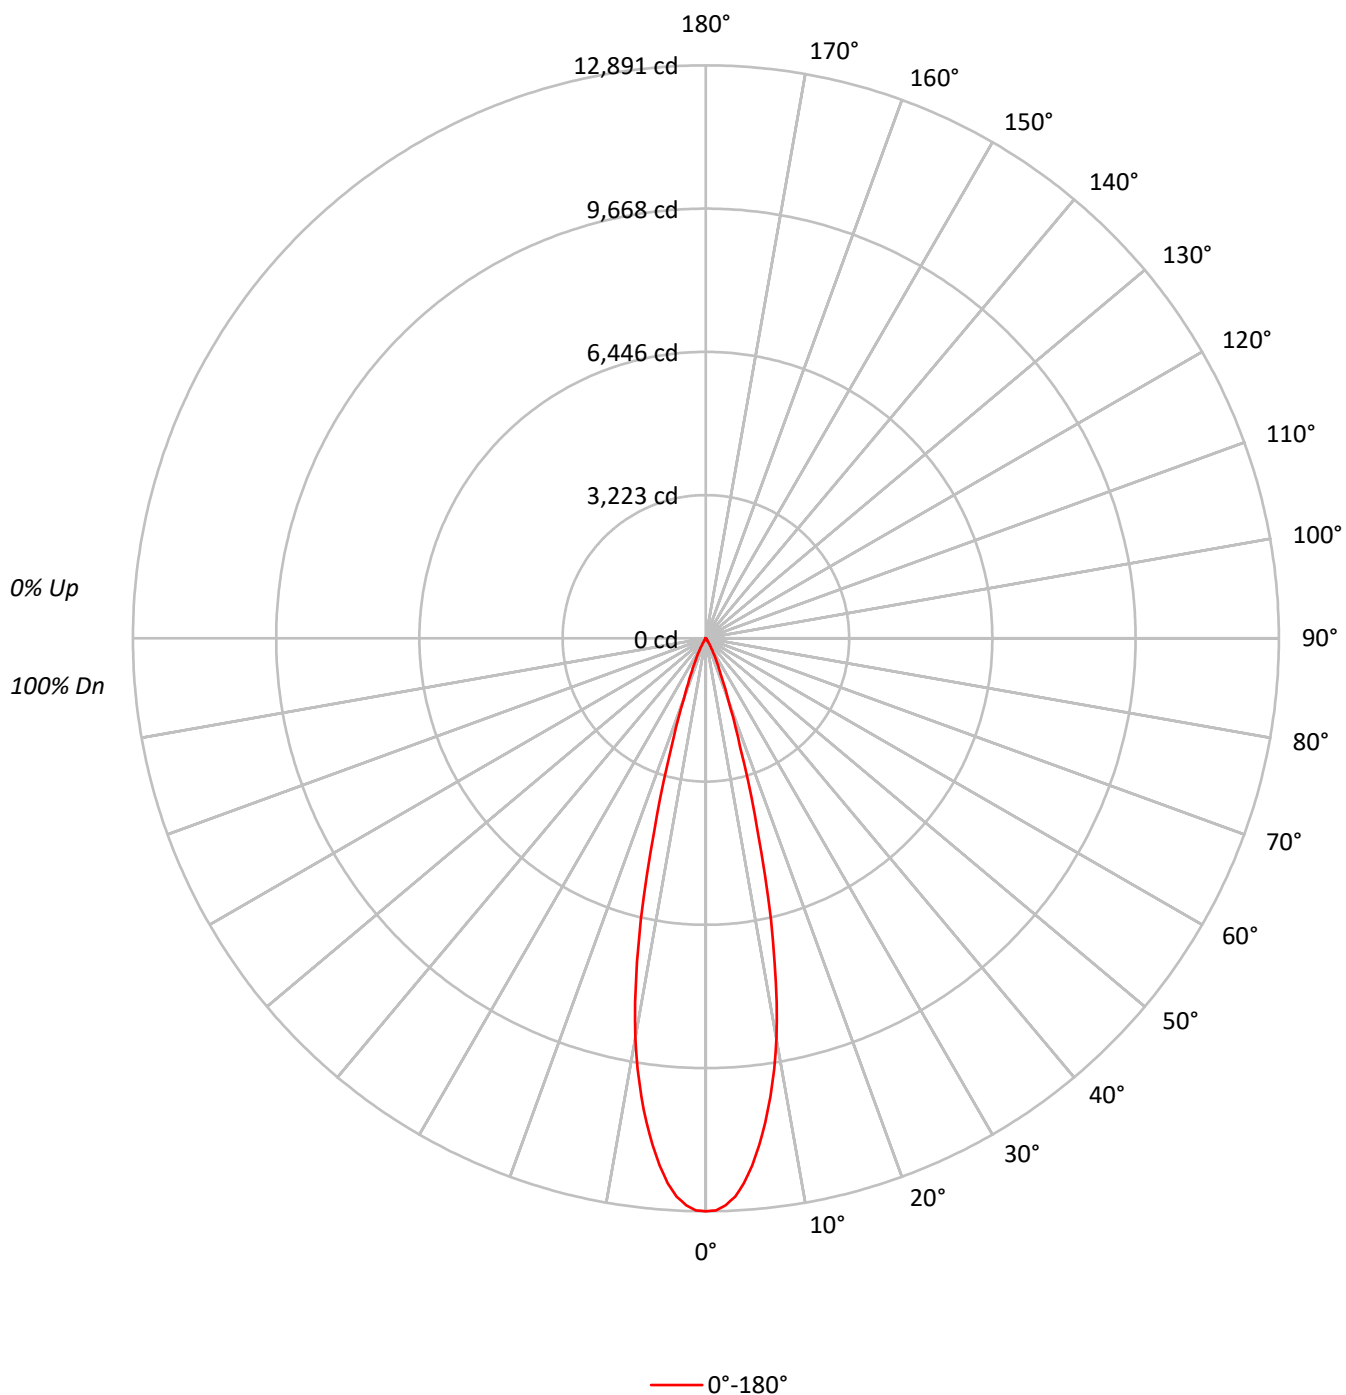

TEST NUMBER: P1258397

CATALOG NUMBER: P3AS24R259040D010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	96	96
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	93	93
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	91	91
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	88	88
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	86	86
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	84	84
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	82	82
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	80	80
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	78	78
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2826813
5°	2621807
10°	2033251
15°	1019529
20°	334956
25°	133193
30°	49957
35°	14455
40°	6527
45°	2574
50°	2115
55°	1606
60°	1842
65°	2179
70°	1346
75°	1779
80°	2652
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 2652 cd/sqm

TEST NUMBER: P1258397

CATALOG NUMBER: P3AS24R259040D010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1047.7	39.6
10°-20°	1249.9	47.3
20°-30°	281.8	10.7
30°-40°	45.7	1.7
40°-50°	8.2	0.3
50°-60°	4.4	0.2
60°-70°	3.9	0.1
70°-80°	2.2	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2579.3	97.6
0°-40°	2625.0	99.3
0°-60°	2637.7	99.8
0°-90°	2644.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2644.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12891	
5°	11911	###
15°	4491	1250
25°	550	282
35°	54	46
45°	8	8
55°	4	4
65°	4	4
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1258397

CATALOG NUMBER: P3AS24R259040D010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	12891.3
1°	12870.6
2°	12766.7
3°	12575.6
4°	12286.9
5°	11910.9
6°	11462.2
7°	10976.1
8°	10419.4
9°	9810.8
10°	9131.5
11°	8348.4
12°	7446.9
13°	6503.8
14°	5492.2
15°	4491.0
17.5°	2559.2
20°	1435.4
22.5°	866.2
25°	550.5
27.5°	338.6
30°	197.3
32.5°	103.9
35°	54.0
37.5°	35.3
40°	22.8
42.5°	14.5
45°	8.3
47.5°	6.2
50°	6.2
52.5°	6.2
55°	4.2
57.5°	4.2
60°	4.2
62.5°	4.2
65°	4.2
67.5°	4.2
70°	2.1
72.5°	2.1
75°	2.1
77.5°	2.1
80°	2.1
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1258397
CATALOG NUMBER: P3AS24R259040D010 E3CB1MB

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)