

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1258429

Luminaire Tested: P3AS24R309040D010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1258429
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R309040D010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R30 optic, 4000K CCT AND, 90CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2644.1 lumens
Efficiency: N/A
Efficacy: 91.8 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1258429

CATALOG NUMBER: P3AS24R309040D010 E3CB1MB

Luminous Intensity Polar Plot

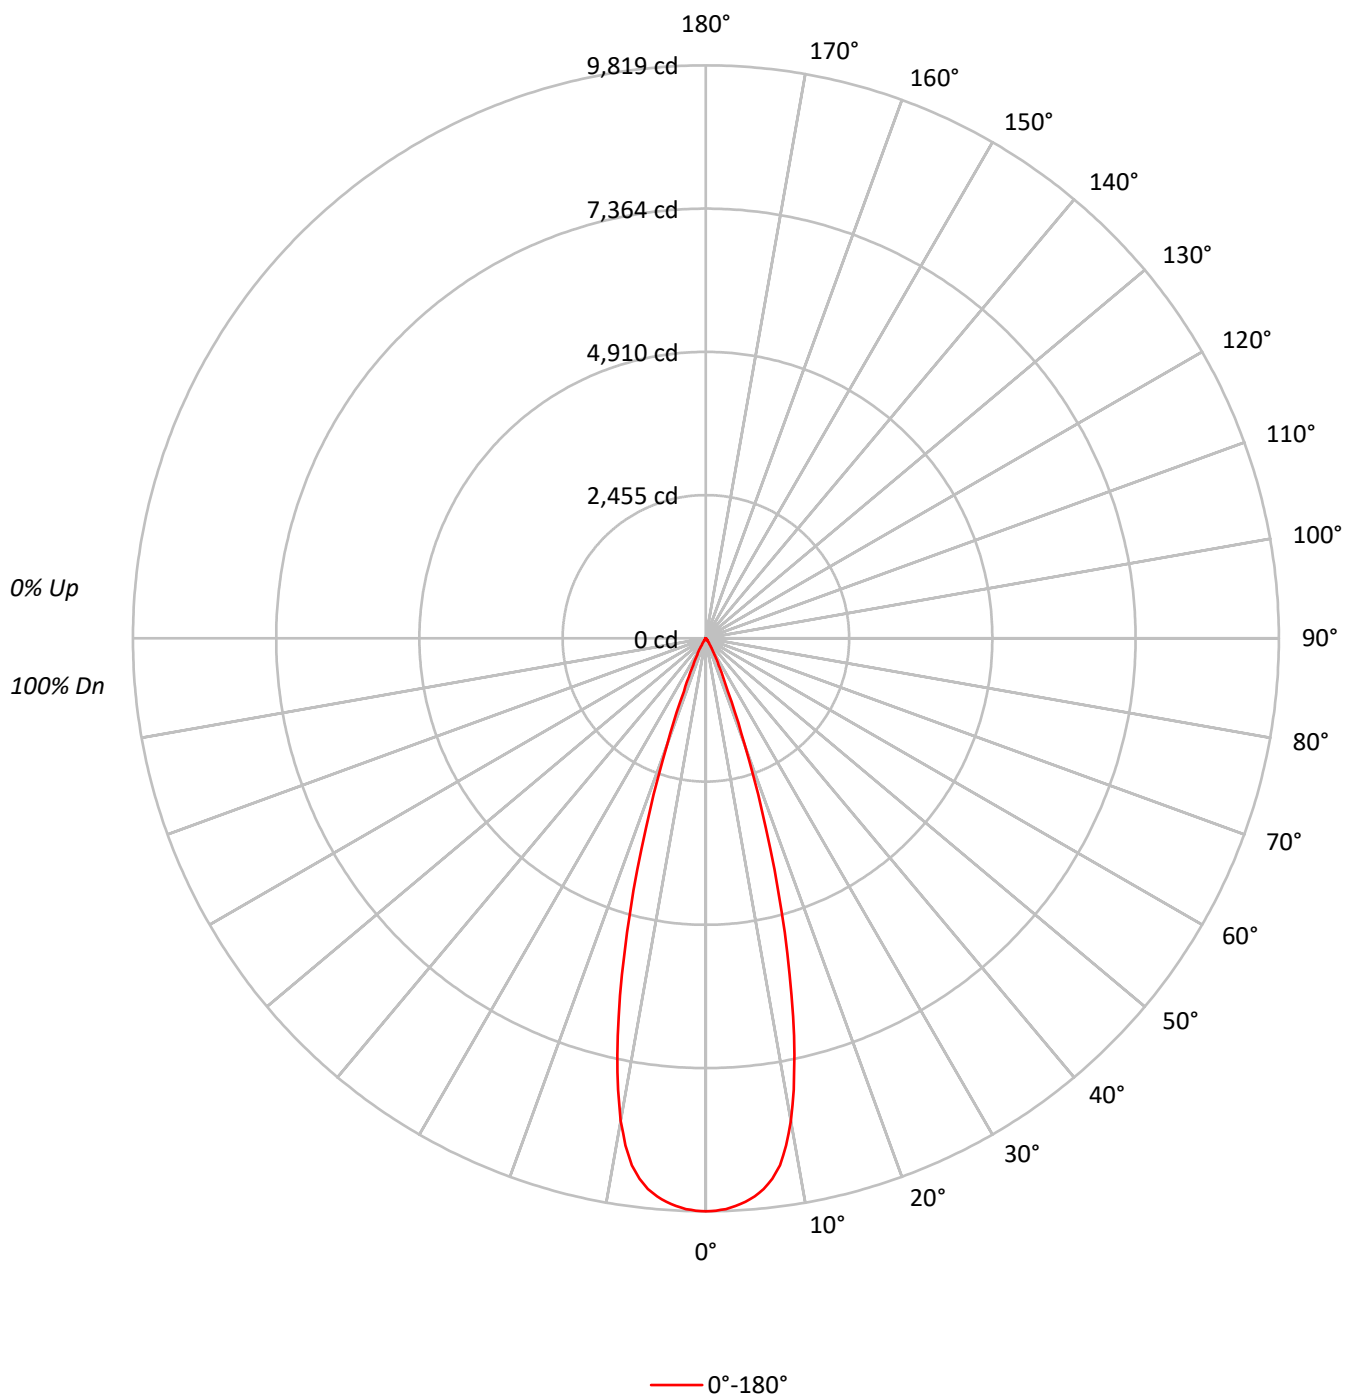

TEST NUMBER: P1258429

CATALOG NUMBER: P3AS24R309040D010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	109		113	111	109	108		107	106	104		103	102	101		100	99	98
2	111	108	105	102		109	106	104	101		103	101	99		100	99	97		98	96	95
3	108	103	100	97		106	102	99	96		100	97	95		97	95	93		95	94	92
4	105	100	96	93		103	99	95	92		97	94	91		95	92	90		93	91	89
5	102	96	92	89		100	95	91	89		94	90	88		92	89	87		91	88	87
6	99	93	89	86		98	92	88	86		91	88	85		90	87	85		89	86	84
7	96	90	86	83		95	89	86	83		88	85	82		87	84	82		86	84	82
8	94	87	83	81		93	87	83	80		86	83	80		85	82	80		84	82	80
9	91	85	81	78		90	84	81	78		84	80	78		83	80	78		82	79	77
10	89	83	79	76		88	82	78	76		82	78	76		81	78	76		80	77	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2153117
5°	2112409
10°	1870017
15°	1184774
20°	449719
25°	133145
30°	52590
35°	16115
40°	7128
45°	2574
50°	2115
55°	1606
60°	1842
65°	2179
70°	1346
75°	1779
80°	2652
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 2652 cd/sqm

TEST NUMBER: P1258429

CATALOG NUMBER: P3AS24R309040D010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	882.2	33.4
10°-20°	1374.9	52.0
20°-30°	319.3	12.1
30°-40°	49.5	1.9
40°-50°	8.4	0.3
50°-60°	4.0	0.2
60°-70°	3.4	0.1
70°-80°	2.2	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2576.3	97.4
0°-40°	2625.8	99.3
0°-60°	2638.2	99.8
0°-90°	2644.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2644.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9819	
5°	9597	882
15°	5219	1375
25°	550	319
35°	60	49
45°	8	8
55°	4	4
65°	4	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1258429

CATALOG NUMBER: P3AS24R309040D010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	9819.0
1°	9812.7
2°	9785.7
3°	9740.0
4°	9681.9
5°	9596.7
6°	9490.8
7°	9333.0
8°	9117.0
9°	8799.3
10°	8398.4
11°	7881.3
12°	7297.8
13°	6649.8
14°	5937.5
15°	5218.9
17.5°	3414.2
20°	1927.2
22.5°	984.4
25°	550.3
27.5°	338.5
30°	207.7
32.5°	112.1
35°	60.2
37.5°	39.5
40°	24.9
42.5°	14.5
45°	8.3
47.5°	6.2
50°	6.2
52.5°	4.2
55°	4.2
57.5°	4.2
60°	4.2
62.5°	4.2
65°	4.2
67.5°	2.1
70°	2.1
72.5°	2.1
75°	2.1
77.5°	2.1
80°	2.1
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1258429

CATALOG NUMBER: P3AS24R309040D010 E3CB1MB

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)