

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1258446

Luminaire Tested: P3AS24R309040D010 E3DLD1GPH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1258446  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS24R309040D010 E3DLD1GPH  
Description: 3in Adjustable LED luminaire with, R30 optic, 4000K CCT AND, 90CRI , E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 830.0 lumens  
Efficiency: N/A  
Efficacy: 28.8 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1258446

CATALOG NUMBER: P3AS24R309040D010 E3DLD1GPH

### Luminous Intensity Polar Plot

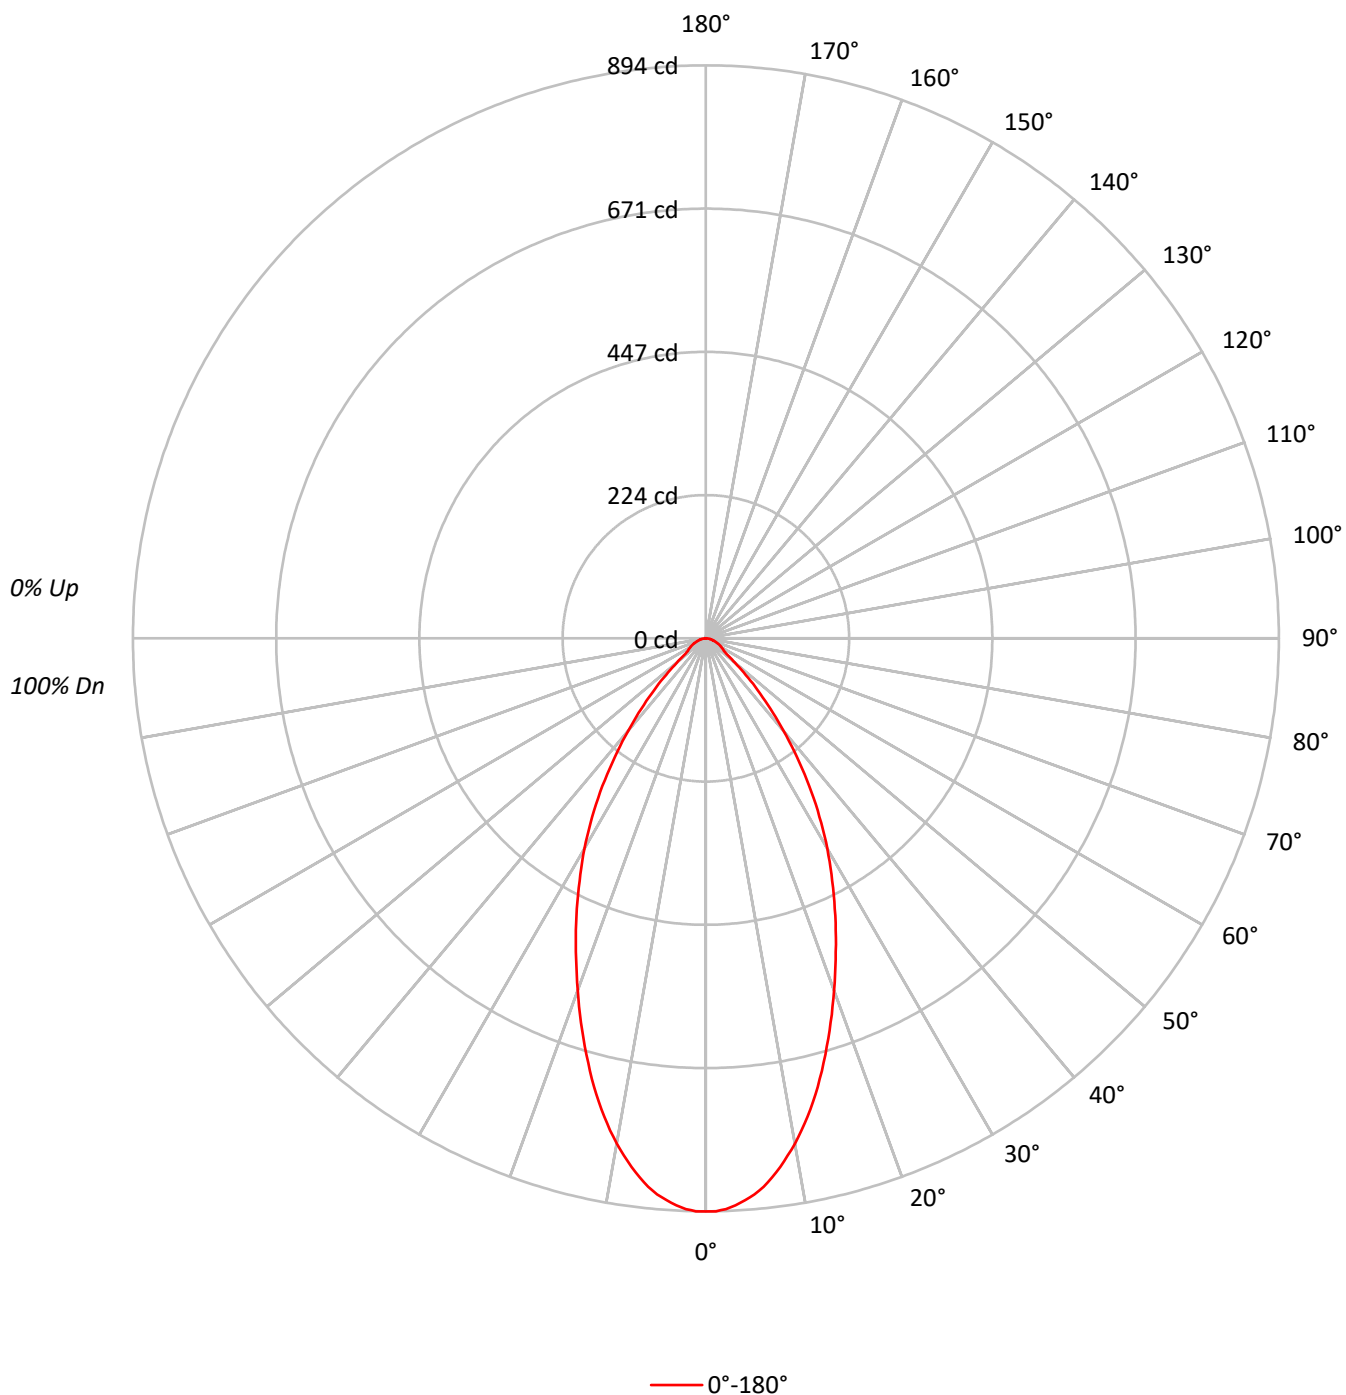

TEST NUMBER: P1258446

CATALOG NUMBER: P3AS24R309040D010 E3DLD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 112 | 109 | 106 | 104 | 110 | 107 | 105 | 102 | 103 | 101 | 99  |  | 99  | 98  | 96  |  | 96  |
| 2   | 106 | 100 | 96  | 92  | 104 | 99  | 94  | 91  | 95  | 92  | 89  |  | 92  | 89  | 87  |  | 89  |
| 3   | 100 | 92  | 87  | 82  | 98  | 91  | 86  | 82  | 88  | 84  | 80  |  | 86  | 82  | 79  |  | 84  |
| 4   | 94  | 85  | 79  | 74  | 92  | 84  | 79  | 74  | 82  | 77  | 73  |  | 80  | 76  | 72  |  | 78  |
| 5   | 89  | 79  | 73  | 68  | 87  | 78  | 72  | 68  | 76  | 71  | 67  |  | 75  | 70  | 66  |  | 73  |
| 6   | 84  | 74  | 67  | 62  | 82  | 73  | 67  | 62  | 71  | 66  | 62  |  | 70  | 65  | 61  |  | 69  |
| 7   | 79  | 69  | 62  | 58  | 78  | 68  | 62  | 58  | 67  | 61  | 57  |  | 66  | 61  | 57  |  | 65  |
| 8   | 75  | 65  | 58  | 54  | 74  | 64  | 58  | 53  | 63  | 57  | 53  |  | 62  | 57  | 53  |  | 61  |
| 9   | 71  | 61  | 54  | 50  | 70  | 60  | 54  | 50  | 59  | 54  | 50  |  | 58  | 53  | 50  |  | 57  |
| 10  | 68  | 57  | 51  | 47  | 67  | 57  | 51  | 47  | 56  | 50  | 47  |  | 55  | 50  | 46  |  | 54  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 196081 |
| 5°  | 191679 |
| 10° | 178242 |
| 15° | 158616 |
| 20° | 136419 |
| 25° | 115579 |
| 30° | 95939  |
| 35° | 75248  |
| 40° | 53930  |
| 45° | 35384  |
| 50° | 20161  |
| 55° | 13228  |
| 60° | 12499  |
| 65° | 11623  |
| 70° | 10450  |
| 75° | 9489   |
| 80° | 8966   |
| 85° | 7799   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 35384 cd/sqm

TEST NUMBER: P1258446

CATALOG NUMBER: P3AS24R309040D010 E3DLD1GPH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 80.8   | 9.7       |
| 10°-20°   | 194.2  | 23.4      |
| 20°-30°   | 218.9  | 26.4      |
| 30°-40°   | 174.8  | 21.1      |
| 40°-50°   | 89.8   | 10.8      |
| 50°-60°   | 33.8   | 4.1       |
| 60°-70°   | 22.2   | 2.7       |
| 70°-80°   | 11.9   | 1.4       |
| 80°-90°   | 3.5    | 0.4       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 494.0  | 59.5      |
| 0°-40°    | 668.8  | 80.6      |
| 0°-60°    | 792.4  | 95.5      |
| 0°-90°    | 830.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 830.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 894 |      |
| 5°  | 871 | 81   |
| 15° | 699 | 194  |
| 25° | 478 | 219  |
| 35° | 281 | 175  |
| 45° | 114 | 90   |
| 55° | 35  | 34   |
| 65° | 22  | 22   |
| 75° | 11  | 12   |
| 85° | 3   | 3    |
| 90° | 0   |      |

TEST NUMBER: P1258446

CATALOG NUMBER: P3AS24R309040D010 E3DLD1GPH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 894.2 |
| 1°    | 894.2 |
| 2°    | 891.2 |
| 3°    | 886.1 |
| 4°    | 879.0 |
| 5°    | 870.8 |
| 6°    | 860.6 |
| 7°    | 847.4 |
| 8°    | 833.1 |
| 9°    | 816.8 |
| 10°   | 800.5 |
| 11°   | 782.2 |
| 12°   | 762.9 |
| 13°   | 742.5 |
| 14°   | 721.1 |
| 15°   | 698.7 |
| 17.5° | 641.7 |
| 20°   | 584.6 |
| 22.5° | 529.6 |
| 25°   | 477.7 |
| 27.5° | 426.7 |
| 30°   | 378.9 |
| 32.5° | 330.0 |
| 35°   | 281.1 |
| 37.5° | 233.2 |
| 40°   | 188.4 |
| 42.5° | 148.7 |
| 45°   | 114.1 |
| 47.5° | 84.5  |
| 50°   | 59.1  |
| 52.5° | 41.8  |
| 55°   | 34.6  |
| 57.5° | 31.6  |
| 60°   | 28.5  |
| 62.5° | 25.5  |
| 65°   | 22.4  |
| 67.5° | 19.4  |
| 70°   | 16.3  |
| 72.5° | 13.2  |
| 75°   | 11.2  |
| 77.5° | 9.2   |
| 80°   | 7.1   |
| 82.5° | 5.1   |
| 85°   | 3.1   |
| 87.5° | 1.0   |



TEST NUMBER: P1258446

CATALOG NUMBER: P3AS24R309040D010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)