

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1258481

Luminaire Tested: P3AS24R359040D010 E3DLP1H

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1258481  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS24R359040D010 E3DLP1H  
Description: 3in Adjustable LED luminaire with, R35 optic, 4000K CCT AND, 90CRI , E3DLP1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1348.0 lumens  
Efficiency: N/A  
Efficacy: 46.8 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1258481

CATALOG NUMBER: P3AS24R359040D010 E3DLP1H

### Luminous Intensity Polar Plot

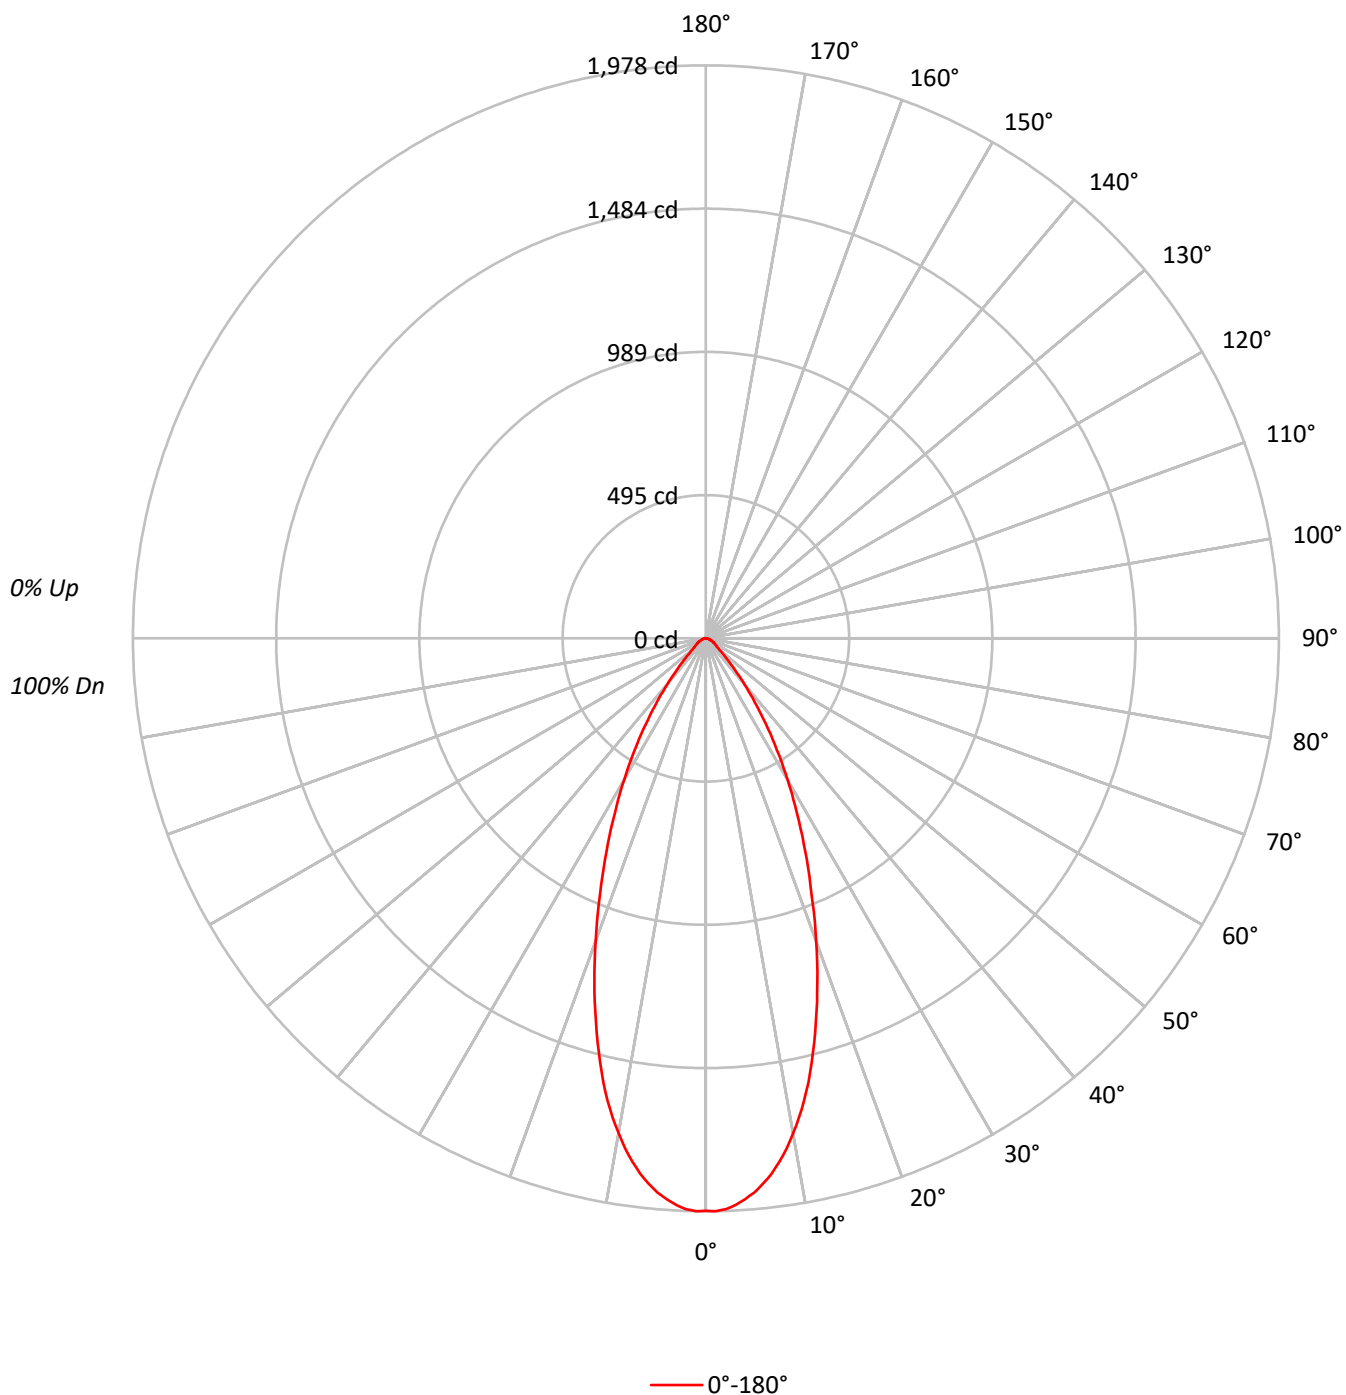

TEST NUMBER: P1258481

CATALOG NUMBER: P3AS24R359040D010 E3DLP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 100 |  | 100 | 99  | 97  |  | 97  |
| 2   | 107 | 102 | 98  | 94  | 105 | 100 | 97  | 93  | 97  | 94  | 91  |  | 94  | 92  | 89  |  | 91  |
| 3   | 102 | 95  | 90  | 86  | 100 | 94  | 89  | 85  | 91  | 87  | 84  |  | 89  | 85  | 82  |  | 86  |
| 4   | 97  | 89  | 83  | 79  | 95  | 88  | 82  | 78  | 86  | 81  | 77  |  | 84  | 80  | 77  |  | 82  |
| 5   | 92  | 83  | 77  | 73  | 90  | 82  | 77  | 73  | 81  | 76  | 72  |  | 79  | 75  | 71  |  | 77  |
| 6   | 87  | 78  | 72  | 68  | 86  | 77  | 72  | 68  | 76  | 71  | 67  |  | 75  | 70  | 67  |  | 73  |
| 7   | 83  | 74  | 68  | 63  | 82  | 73  | 67  | 63  | 72  | 67  | 63  |  | 71  | 66  | 63  |  | 69  |
| 8   | 79  | 70  | 64  | 60  | 78  | 69  | 63  | 59  | 68  | 63  | 59  |  | 67  | 62  | 59  |  | 66  |
| 9   | 76  | 66  | 60  | 56  | 75  | 66  | 60  | 56  | 65  | 59  | 56  |  | 64  | 59  | 56  |  | 63  |
| 10  | 72  | 63  | 57  | 53  | 71  | 62  | 57  | 53  | 61  | 56  | 53  |  | 61  | 56  | 53  |  | 60  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 433277 |
| 5°  | 422605 |
| 10° | 386366 |
| 15° | 327947 |
| 20° | 259606 |
| 25° | 196342 |
| 30° | 142959 |
| 35° | 96664  |
| 40° | 59426  |
| 45° | 34112  |
| 50° | 20537  |
| 55° | 16668  |
| 60° | 14560  |
| 65° | 12920  |
| 70° | 10643  |
| 75° | 10590  |
| 80° | 10481  |
| 85° | 10567  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 34112 cd/sqm

TEST NUMBER: P1258481

CATALOG NUMBER: P3AS24R359040D010 E3DLP1H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 177.4  | 13.2      |
| 10°-20°   | 398.3  | 29.5      |
| 20°-30°   | 372.6  | 27.6      |
| 30°-40°   | 228.0  | 16.9      |
| 40°-50°   | 89.9   | 6.7       |
| 50°-60°   | 39.6   | 2.9       |
| 60°-70°   | 24.6   | 1.8       |
| 70°-80°   | 13.2   | 1.0       |
| 80°-90°   | 4.5    | 0.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 948.2  | 70.3      |
| 0°-40°    | 1176.2 | 87.3      |
| 0°-60°    | 1305.7 | 96.9      |
| 0°-90°    | 1348.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1348.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1976 |      |
| 5°  | 1920 | 177  |
| 15° | 1445 | 398  |
| 25° | 812  | 373  |
| 35° | 361  | 228  |
| 45° | 110  | 90   |
| 55° | 44   | 40   |
| 65° | 25   | 25   |
| 75° | 12   | 13   |
| 85° | 4    | 5    |
| 90° | 0    |      |

TEST NUMBER: P1258481

CATALOG NUMBER: P3AS24R359040D010 E3DLP1H

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1975.9 |
| 1°    | 1978.0 |
| 2°    | 1971.8 |
| 3°    | 1959.3 |
| 4°    | 1940.6 |
| 5°    | 1919.9 |
| 6°    | 1892.9 |
| 7°    | 1861.8 |
| 8°    | 1824.4 |
| 9°    | 1782.9 |
| 10°   | 1735.2 |
| 11°   | 1685.4 |
| 12°   | 1631.4 |
| 13°   | 1573.3 |
| 14°   | 1508.9 |
| 15°   | 1444.6 |
| 17.5° | 1278.5 |
| 20°   | 1112.5 |
| 22.5° | 952.7  |
| 25°   | 811.5  |
| 27.5° | 680.8  |
| 30°   | 564.6  |
| 32.5° | 456.6  |
| 35°   | 361.1  |
| 37.5° | 276.0  |
| 40°   | 207.6  |
| 42.5° | 149.4  |
| 45°   | 110.0  |
| 47.5° | 78.9   |
| 50°   | 60.2   |
| 52.5° | 49.8   |
| 55°   | 43.6   |
| 57.5° | 37.4   |
| 60°   | 33.2   |
| 62.5° | 29.1   |
| 65°   | 24.9   |
| 67.5° | 20.8   |
| 70°   | 16.6   |
| 72.5° | 14.5   |
| 75°   | 12.5   |
| 77.5° | 10.4   |
| 80°   | 8.3    |
| 82.5° | 6.2    |
| 85°   | 4.2    |
| 87.5° | 2.1    |



TEST NUMBER: P1258481

CATALOG NUMBER: P3AS24R359040D010 E3DLP1H

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)