

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259206

Luminaire Tested: P3AS05R259050DE010 E3PHLD1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1259206
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259050DE010 E3PHLD1MW
Description: 3in Adjustable LED luminaire with, R25 optic, 5000K CCT AND, 90CRI , E3PHLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 439.0 lumens
Efficiency: N/A
Efficacy: 61.0 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.71
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1259206

CATALOG NUMBER: P3AS05R259050DE010 E3PHLD1MW

Luminous Intensity Polar Plot

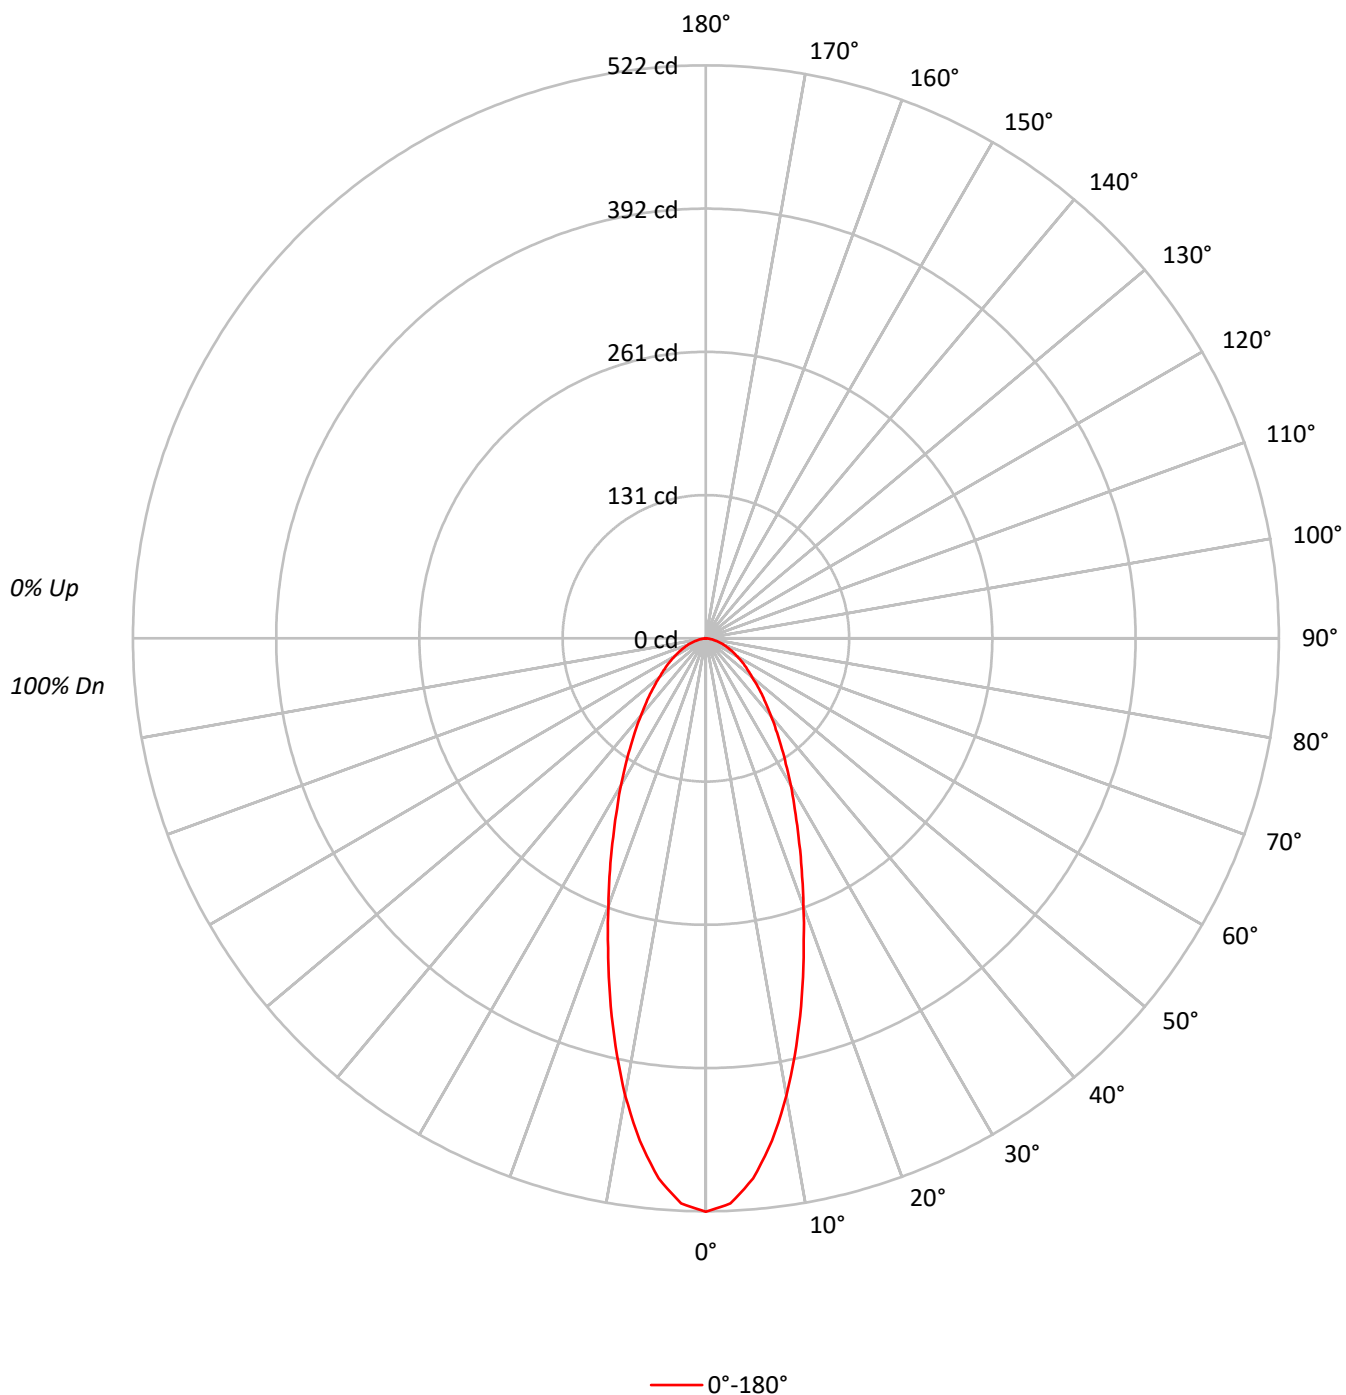

TEST NUMBER: P1259206

CATALOG NUMBER: P3AS05R259050DE010 E3PHLD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	108	105	102	109	106	103	100	102	99	97		98	96	94		95
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87
3	97	89	83	78	95	88	82	77	85	80	76		83	78	75		80
4	91	82	75	70	89	81	74	69	78	73	69		76	72	68		74
5	86	76	68	63	84	75	68	63	73	67	62		71	66	62		69
6	81	70	63	58	79	69	62	57	68	62	57		66	61	57		65
7	76	65	58	53	75	64	58	53	63	57	53		62	56	52		61
8	72	61	54	49	71	60	54	49	59	53	49		58	53	49		57
9	68	57	50	46	67	57	50	46	56	50	46		55	49	45		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	43		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	114552
5°	108738
10°	94164
15°	76663
20°	60579
25°	48293
30°	39171
35°	31882
40°	26421
45°	22266
50°	18831
55°	16592
60°	14516
65°	12712
70°	11156
75°	9320
80°	6945
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 22266 cd/sqm

TEST NUMBER: P1259206

CATALOG NUMBER: P3AS05R259050DE010 E3PHLD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.9	10.2
10°-20°	93.6	21.3
20°-30°	92.3	21.0
30°-40°	75.1	17.1
40°-50°	55.7	12.7
50°-60°	38.9	8.9
60°-70°	24.4	5.6
70°-80°	11.7	2.7
80°-90°	2.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	230.8	52.6
0°-40°	305.9	69.7
0°-60°	400.6	91.3
0°-90°	439.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	439.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	522	
5°	494	45
15°	338	94
25°	200	92
35°	119	75
45°	72	56
55°	43	39
65°	24	24
75°	11	12
85°	2	2
90°	0	

TEST NUMBER: P1259206

CATALOG NUMBER: P3AS05R259050DE010 E3PHLD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	522.4
2.5°	515.3
5°	494.0
7.5°	461.6
10°	422.9
12.5°	380.3
15°	337.7
17.5°	295.9
20°	259.6
22.5°	228.0
25°	199.6
27.5°	175.2
30°	154.7
32.5°	135.7
35°	119.1
37.5°	104.9
40°	92.3
42.5°	81.3
45°	71.8
47.5°	63.1
50°	55.2
52.5°	48.9
55°	43.4
57.5°	37.9
60°	33.1
62.5°	28.4
65°	24.5
67.5°	20.5
70°	17.4
72.5°	14.2
75°	11.0
77.5°	7.9
80°	5.5
82.5°	3.2
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)