

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259416

Luminaire Tested: P3AS05R659050DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1259416
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R659050DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R65 optic, 5000K CCT AND, 90CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 652.0 lumens
Efficiency: N/A
Efficacy: 90.6 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1259416

CATALOG NUMBER: P3AS05R659050DE010 E3D1LI

Luminous Intensity Polar Plot

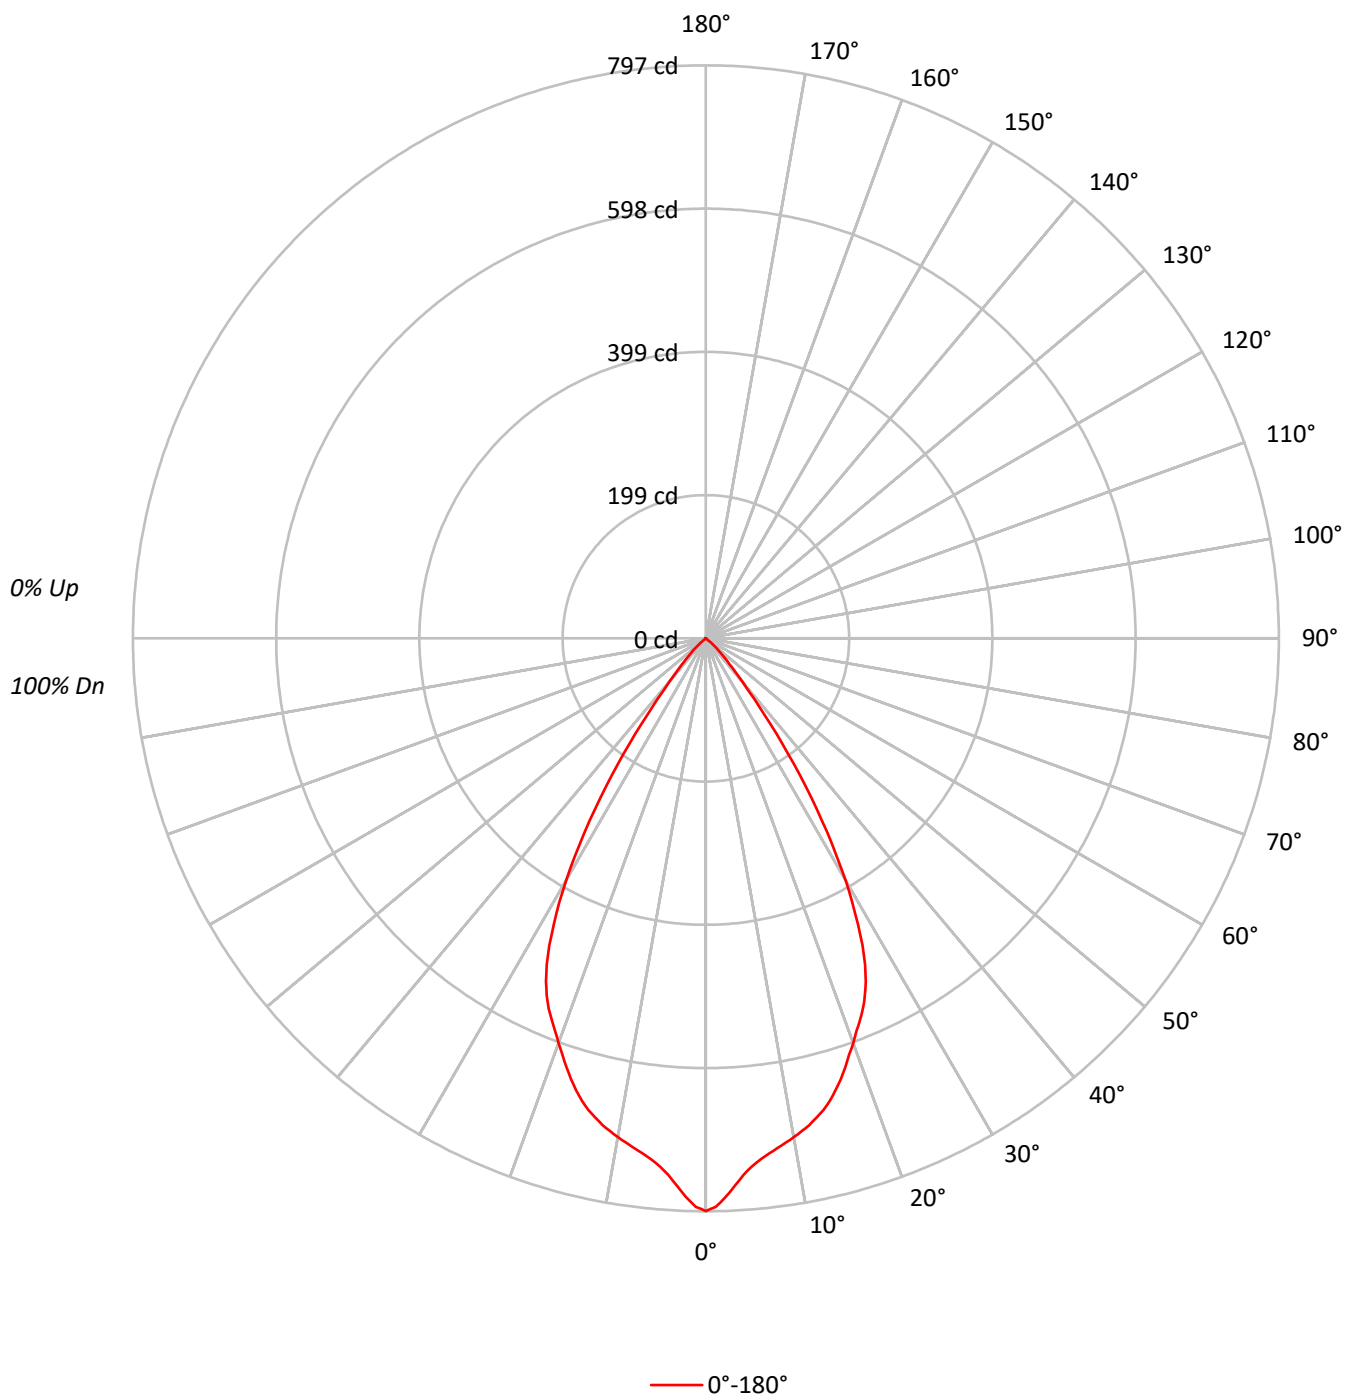

TEST NUMBER: P1259416

CATALOG NUMBER: P3AS05R659050DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	95	91	88	93	89	86		90	87	85		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75
7	84	75	70	65	83	75	69	65	73	69	65		72	68	65		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		67
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	174701
5°	162227
10°	156866
15°	151193
20°	139779
25°	127338
30°	98395
35°	57045
40°	22642
45°	9644
50°	2286
55°	306
60°	219
65°	156
70°	192
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 9644 cd/sqm

TEST NUMBER: P1259416

CATALOG NUMBER: P3AS05R659050DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.5	10.7
10°-20°	185.6	28.5
20°-30°	234.9	36.0
30°-40°	133.7	20.5
40°-50°	26.6	4.1
50°-60°	1.4	0.2
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	489.9	75.1
0°-40°	623.7	95.7
0°-60°	651.6	99.9
0°-90°	652.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	652.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	797	
5°	737	70
15°	666	186
25°	526	235
35°	213	134
45°	31	27
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1259416

CATALOG NUMBER: P3AS05R659050DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	796.7
1°	790.8
2°	778.0
3°	763.0
4°	748.2
5°	737.0
6°	728.7
7°	722.0
8°	716.1
9°	710.2
10°	704.5
11°	698.4
12°	691.9
13°	684.2
14°	675.9
15°	666.0
16°	654.2
17°	641.3
18°	627.4
19°	612.6
20°	599.0
21°	585.0
22°	572.4
23°	559.3
24°	544.0
25°	526.3
26°	505.2
27°	479.7
28°	451.0
29°	420.5
30°	388.6
31°	353.5
32°	318.6
32.5°	300.7
33°	283.3
34°	247.9
35°	213.1
36°	180.9
37°	149.0
37.5°	132.7
38°	119.5
39°	96.7
40°	79.1
42.5°	48.8
45°	31.1



TEST NUMBER: P1259416

CATALOG NUMBER: P3AS05R659050DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	18.2
50°	6.7
52.5°	1.3
55°	0.8
57.5°	0.5
60°	0.5
62.5°	0.5
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)