

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259436

Luminaire Tested: P3AS05R659050DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1259436
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R659050DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R65 optic, 5000K CCT AND, 90CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 548.0 lumens
Efficiency: N/A
Efficacy: 76.1 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1259436

CATALOG NUMBER: P3AS05R659050DE010 E3DLP1WH

Luminous Intensity Polar Plot

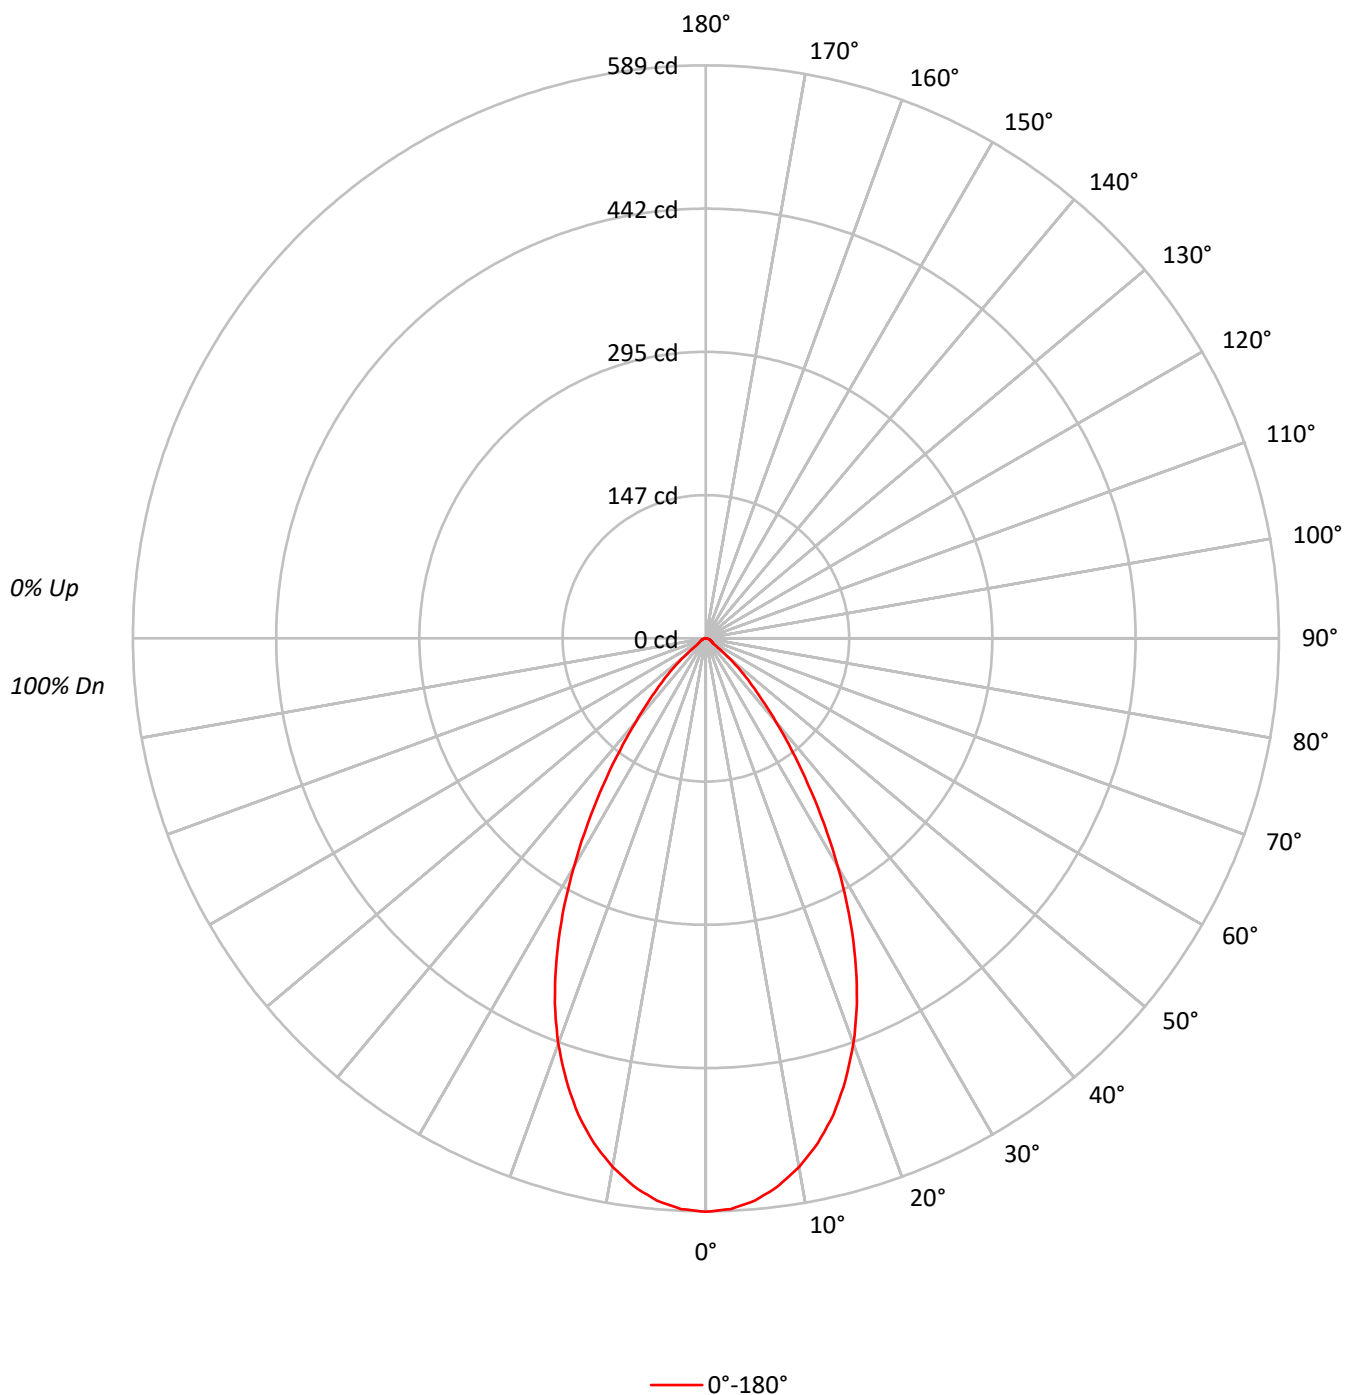

TEST NUMBER: P1259436

CATALOG NUMBER: P3AS05R659050DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	95	89	85	99	93	88	84	90	86	83		88	85	82		86
4	96	88	82	78	94	87	81	77	85	80	76		83	79	75		81
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	64	61		69	64	60		67
8	77	67	61	57	76	67	61	57	66	60	57		65	60	56		64
9	74	64	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	59	54	50	59	53	50		58	53	50		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	129244
5°	127691
10°	122843
15°	115074
20°	103492
25°	87876
30°	68745
35°	48988
40°	32060
45°	19816
50°	10064
55°	3555
60°	3114
65°	3113
70°	2821
75°	2796
80°	2778
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 19816 cd/sqm

TEST NUMBER: P1259436

CATALOG NUMBER: P3AS05R659050DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.5	9.9
10°-20°	141.1	25.7
20°-30°	164.9	30.1
30°-40°	115.2	21.0
40°-50°	50.7	9.3
50°-60°	11.3	2.1
60°-70°	5.8	1.0
70°-80°	3.5	0.6
80°-90°	1.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	360.4	65.8
0°-40°	475.6	86.8
0°-60°	537.6	98.1
0°-90°	548.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	548.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	589	
5°	580	54
15°	507	141
25°	363	165
35°	183	115
45°	64	51
55°	9	11
65°	6	6
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1259436

CATALOG NUMBER: P3AS05R659050DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	589.4
2.5°	587.2
5°	580.1
7.5°	568.1
10°	551.7
12.5°	531.5
15°	506.9
17.5°	476.8
20°	443.5
22.5°	405.8
25°	363.2
27.5°	318.4
30°	271.5
32.5°	226.1
35°	183.0
37.5°	145.3
40°	112.0
42.5°	84.7
45°	63.9
47.5°	47.0
50°	29.5
52.5°	15.3
55°	9.3
57.5°	8.2
60°	7.1
62.5°	6.6
65°	6.0
67.5°	4.9
70°	4.4
72.5°	3.8
75°	3.3
77.5°	2.7
80°	2.2
82.5°	1.6
85°	1.1
87.5°	0.5
90°	0.0

(END OF REPORT)