

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259476

Luminaire Tested: P3AS09R159050DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1259476
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R159050DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R15 optic, 5000K CCT AND, 90CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 830.0 lumens
Efficiency: N/A
Efficacy: 74.8 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1259476

CATALOG NUMBER: P3AS09R159050DE010 E3DL1LI

Luminous Intensity Polar Plot

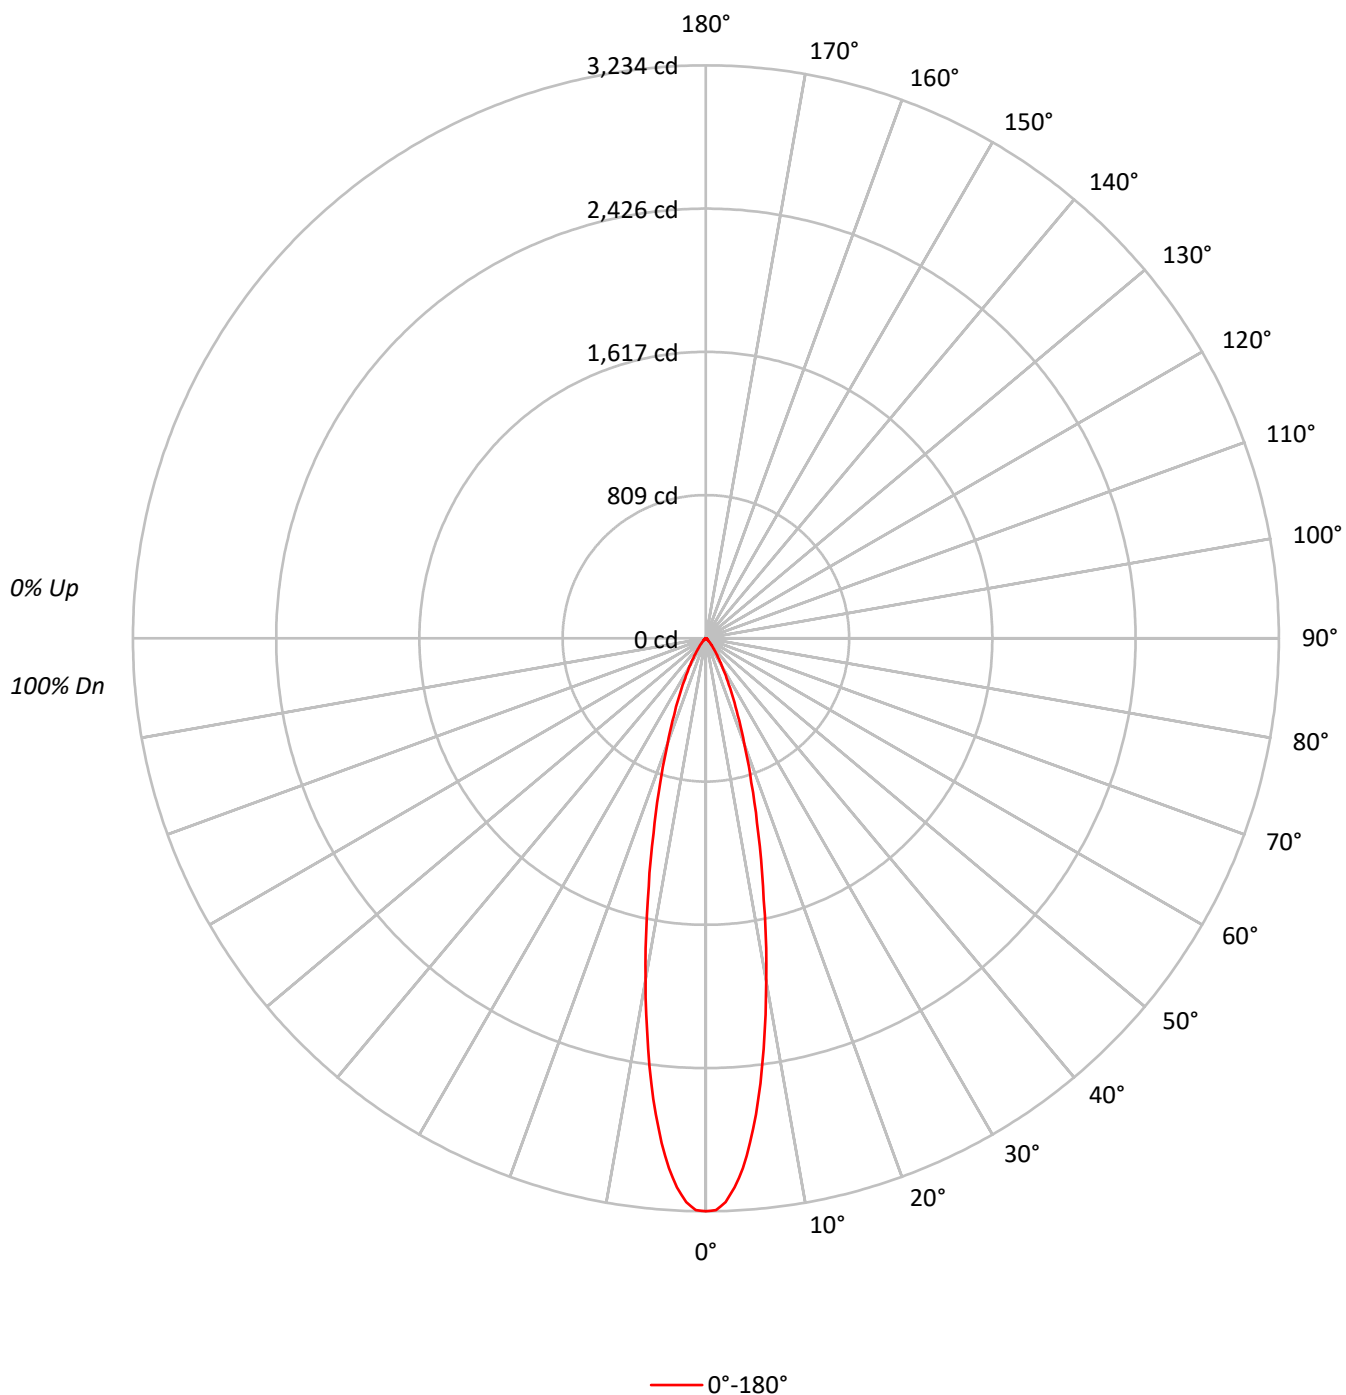

TEST NUMBER: P1259476

CATALOG NUMBER: P3AS09R159050DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	106	103	100	108	104	101	99	101	99	97		98	96	95		96
3	106	101	97	93	104	99	96	93	97	94	91		94	92	90		92
4	102	96	92	88	100	95	91	88	93	89	87		91	88	86		89
5	98	92	87	84	97	91	87	83	89	85	83		88	84	82		86
6	95	88	83	80	94	87	83	80	86	82	79		85	81	79		83
7	92	85	80	77	91	84	80	76	83	79	76		82	78	76		81
8	89	81	77	74	88	81	77	73	80	76	73		79	75	73		78
9	86	79	74	71	85	78	74	71	77	73	71		77	73	70		76
10	84	76	71	68	83	76	71	68	75	71	68		74	71	68		74

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	709044
5°	629384
10°	437088
15°	258480
20°	147223
25°	84150
30°	46564
35°	24842
40°	13740
45°	7443
50°	4640
55°	3670
60°	3158
65°	2906
70°	2565
75°	2711
80°	2020
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7443 cd/sqm

TEST NUMBER: P1259476

CATALOG NUMBER: P3AS09R159050DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	243.1	29.3
10°-20°	320.9	38.7
20°-30°	165.2	19.9
30°-40°	62.0	7.5
40°-50°	20.3	2.4
50°-60°	8.7	1.1
60°-70°	5.5	0.7
70°-80°	3.3	0.4
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	729.3	87.9
0°-40°	791.3	95.3
0°-60°	820.4	98.8
0°-90°	830.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	830.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3234	
5°	2859	243
15°	1139	321
25°	348	165
35°	93	62
45°	24	20
55°	10	9
65°	6	6
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1259476

CATALOG NUMBER: P3AS09R159050DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	3233.5
1°	3227.1
2°	3184.7
3°	3103.9
4°	2997.6
5°	2859.3
6°	2702.6
7°	2530.6
8°	2339.5
9°	2150.9
10°	1963.0
12.5°	1510.4
15°	1138.6
17.5°	852.3
20°	630.9
22.5°	470.9
25°	347.8
27.5°	253.5
30°	183.9
32.5°	130.3
35°	92.8
37.5°	66.4
40°	48.0
42.5°	34.4
45°	24.0
47.5°	17.6
50°	13.6
52.5°	11.2
55°	9.6
57.5°	8.0
60°	7.2
62.5°	6.4
65°	5.6
67.5°	4.8
70°	4.0
72.5°	4.0
75°	3.2
77.5°	2.4
80°	1.6
82.5°	1.6
85°	0.8
87.5°	0.0
90°	0.0

(END OF REPORT)