

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259645

Luminaire Tested: P3AS09R459050DE010 E3CD1MB

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1259645  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R459050DE010 E3CD1MB  
Description: 3in Adjustable LED luminaire with, R45 optic, 5000K CCT AND, 90CRI , E3CD1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1072.0 lumens  
Efficiency: N/A  
Efficacy: 96.6 lumens/watt  
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1259645  
CATALOG NUMBER: P3AS09R459050DE010 E3CD1MB

### Luminous Intensity Polar Plot

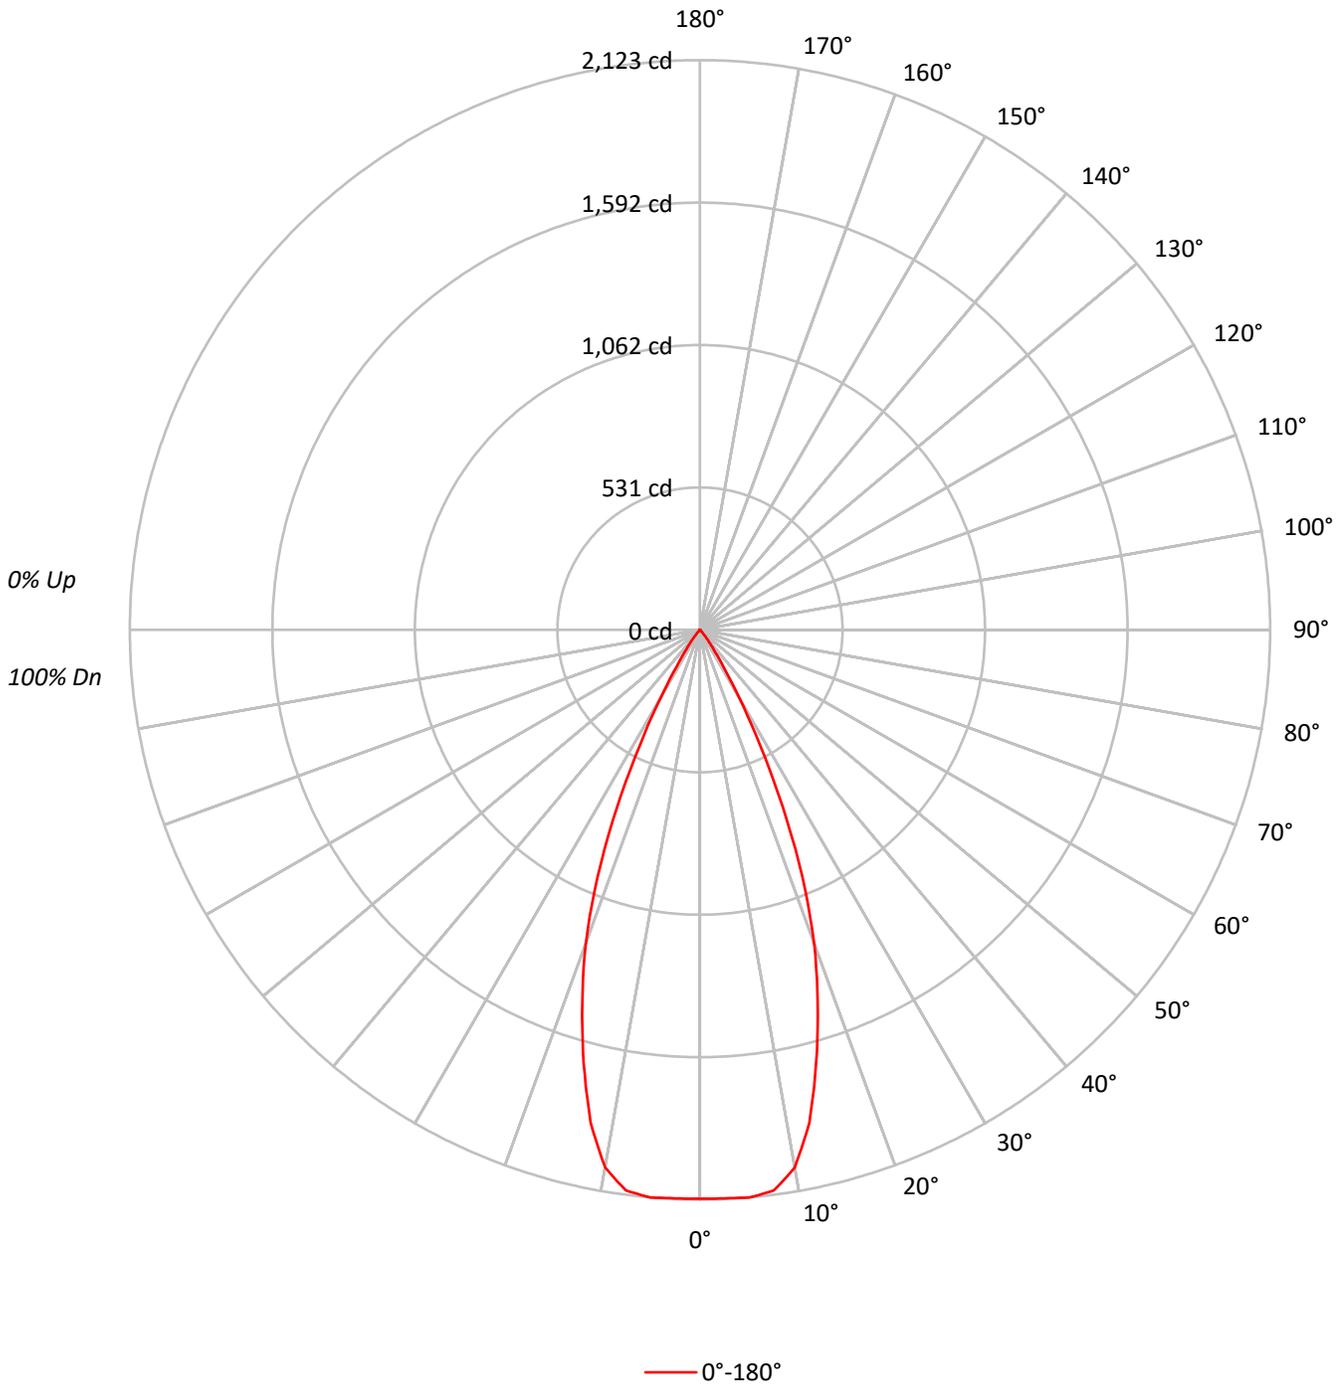



TEST NUMBER: P1259645

CATALOG NUMBER: P3AS09R459050DE010 E3CD1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	96	93	91	94	91	89	92	90	88	86	86	86	86
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	88	86	84	82	82	82	82
5	98	91	86	82	96	90	85	82	88	84	81	87	83	81	85	82	80	79	79	79	79
6	94	87	82	78	93	86	81	78	85	80	77	83	80	77	82	79	76	75	75	75	75
7	90	83	78	74	89	82	78	74	81	77	74	80	76	74	79	76	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	64	64	64	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	464765
5°	467245
10°	452897
15°	379525
20°	290129
25°	176623
30°	73480
35°	23530
40°	7328
45°	1489
50°	1092
55°	1223
60°	1053
65°	1245
70°	1026
75°	1356
80°	1010
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1489 cd/sqm



TEST NUMBER: P1259645  
 CATALOG NUMBER: P3AS09R459050DE010 E3CD1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	200.2	18.7
10°-20°	459.5	42.9
20°-30°	330.8	30.9
30°-40°	68.8	6.4
40°-50°	6.3	0.6
50°-60°	2.6	0.2
60°-70°	2.1	0.2
70°-80°	1.4	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	990.5	92.4
0°-40°	1059.3	98.8
0°-60°	1068.2	99.6
0°-90°	1072.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1072.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2120	
5°	2123	200
15°	1672	459
25°	730	331
35°	88	69
45°	5	6
55°	3	3
65°	2	2
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P1259645  
CATALOG NUMBER: P3AS09R459050DE010 E3CD1MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2119.5
2.5°	2120.3
5°	2122.7
7.5°	2107.5
10°	2034.0
12.5°	1880.5
15°	1671.8
17.5°	1458.3
20°	1243.3
22.5°	996.2
25°	730.0
27.5°	481.3
30°	290.2
32.5°	162.3
35°	87.9
37.5°	49.6
40°	25.6
42.5°	11.2
45°	4.8
47.5°	3.2
50°	3.2
52.5°	3.2
55°	3.2
57.5°	2.4
60°	2.4
62.5°	2.4
65°	2.4
67.5°	1.6
70°	1.6
72.5°	1.6
75°	1.6
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)