

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259830

Luminaire Tested: P3AS10R129050DE010 E3DLD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1259830
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS10R129050DE010 E3DLD1MW
Description: 3in Adjustable LED luminaire with, R12 optic, 5000K CCT AND, 90CRI , E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 586.0 lumens
Efficiency: N/A
Efficacy: 50.1 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1259830

CATALOG NUMBER: P3AS10R129050DE010 E3DLD1MW

Luminous Intensity Polar Plot

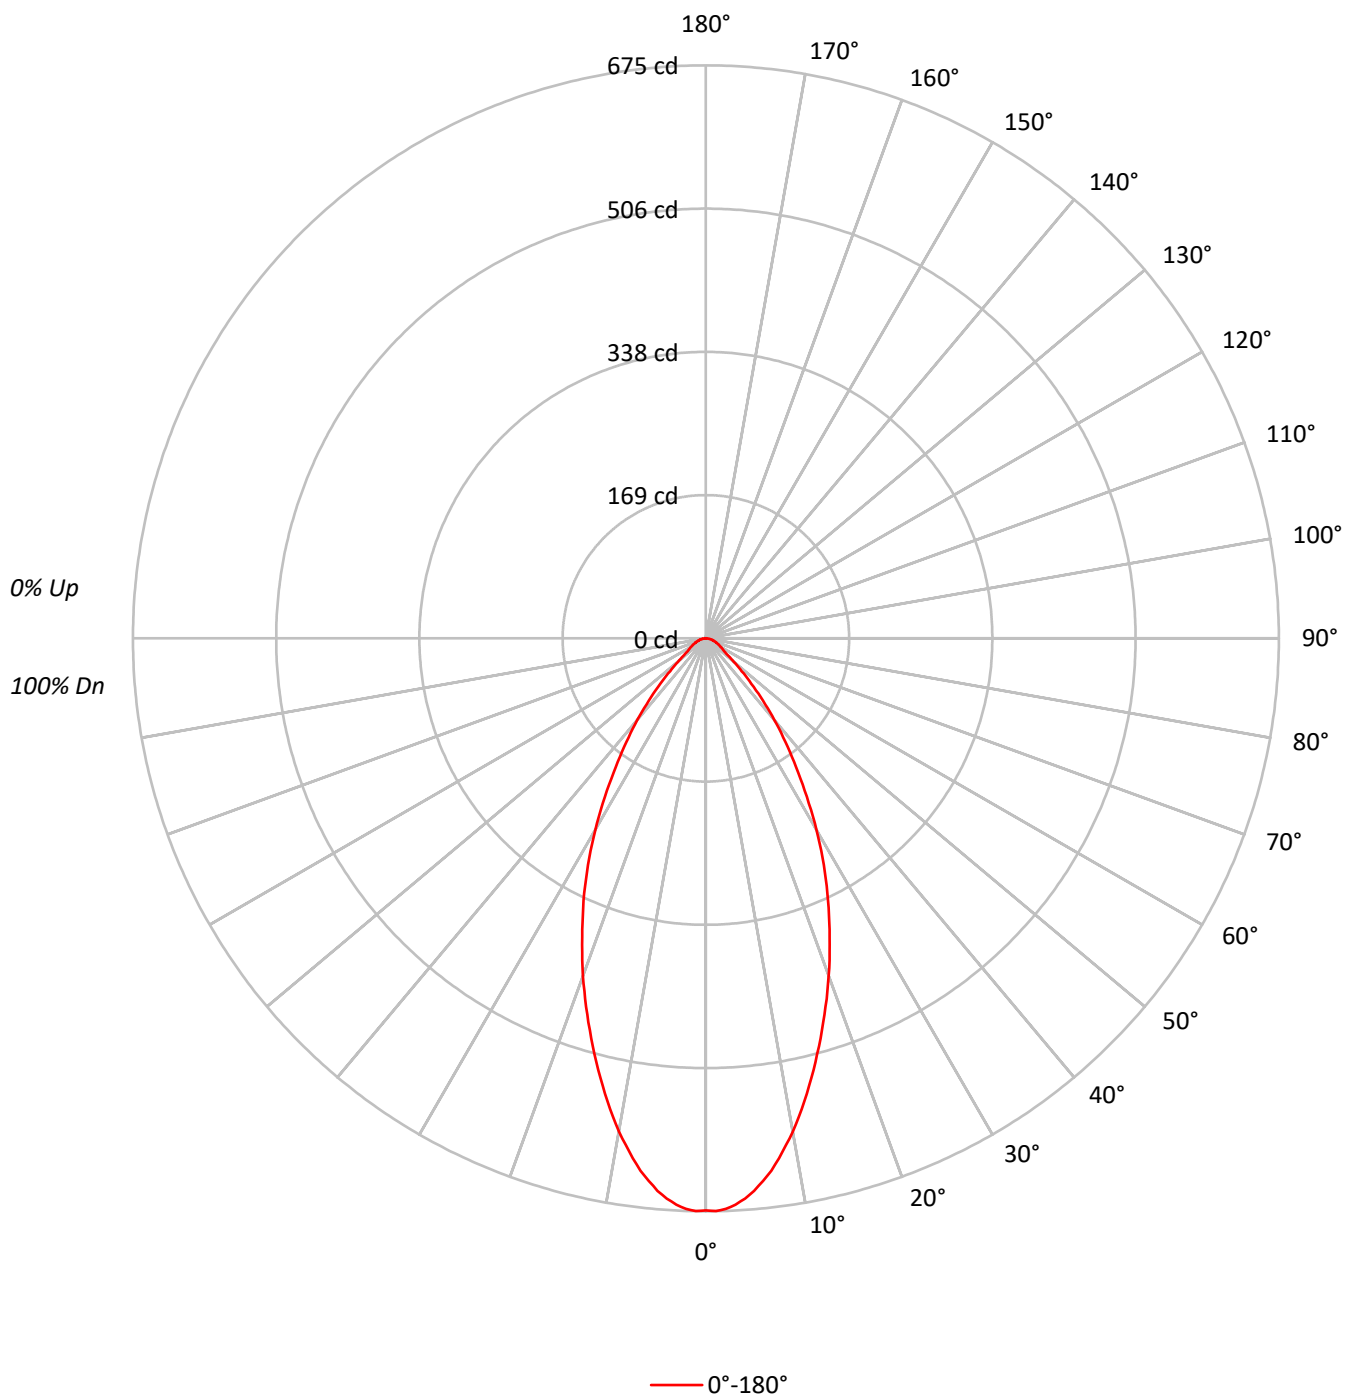

TEST NUMBER: P1259830

CATALOG NUMBER: P3AS10R129050DE010 E3DLD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91		
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83		
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76		
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70		
5	89	80	73	68	87	79	73	68	77	72	67	75	70	67	74	69	66	65		
6	84	74	68	63	83	73	67	63	72	66	62	70	66	62	69	65	61	60		
7	80	69	63	58	78	69	63	58	67	62	58	66	61	57	65	61	57	56		
8	76	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	52		
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	49		
10	68	58	52	48	67	57	51	47	57	51	47	56	51	47	55	50	47	46		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	147817
5°	143803
10°	131416
15°	115097
20°	98755
25°	82432
30°	65985
35°	49496
40°	35924
45°	23475
50°	14703
55°	9940
60°	8771
65°	8094
70°	7629
75°	6947
80°	6566
85°	5535

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23475 cd/sqm

TEST NUMBER: P1259830

CATALOG NUMBER: P3AS10R129050DE010 E3DLD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.3	10.3
10°-20°	141.3	24.1
20°-30°	155.7	26.6
30°-40°	116.6	19.9
40°-50°	60.4	10.3
50°-60°	25.0	4.3
60°-70°	15.5	2.6
70°-80°	8.7	1.5
80°-90°	2.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	357.2	61.0
0°-40°	473.8	80.8
0°-60°	559.3	95.4
0°-90°	586.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	586.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	674	
5°	653	60
15°	507	141
25°	341	156
35°	185	117
45°	76	60
55°	26	25
65°	16	16
75°	8	9
85°	2	3
90°	0	

TEST NUMBER: P1259830

CATALOG NUMBER: P3AS10R129050DE010 E3DLD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	674.1
1°	674.8
2°	672.6
3°	668.1
4°	661.5
5°	653.3
6°	642.9
7°	631.8
8°	618.4
9°	604.3
10°	590.2
12.5°	549.4
15°	507.0
17.5°	464.7
20°	423.2
22.5°	380.8
25°	340.7
27.5°	300.7
30°	260.6
32.5°	221.2
35°	184.9
37.5°	153.7
40°	125.5
42.5°	99.5
45°	75.7
47.5°	57.2
50°	43.1
52.5°	31.9
55°	26.0
57.5°	23.0
60°	20.0
62.5°	17.8
65°	15.6
67.5°	13.4
70°	11.9
72.5°	9.7
75°	8.2
77.5°	6.7
80°	5.2
82.5°	3.7
85°	2.2
87.5°	0.7
90°	0.0

(END OF REPORT)