

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259977

Luminaire Tested: P3AS13R309050DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1259977
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R309050DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R30 optic, 5000K CCT AND, 90CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 424.0 lumens
Efficiency: N/A
Efficacy: 29.0 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1259977

CATALOG NUMBER: P3AS13R309050DE010 E3DLD1GPH

Luminous Intensity Polar Plot

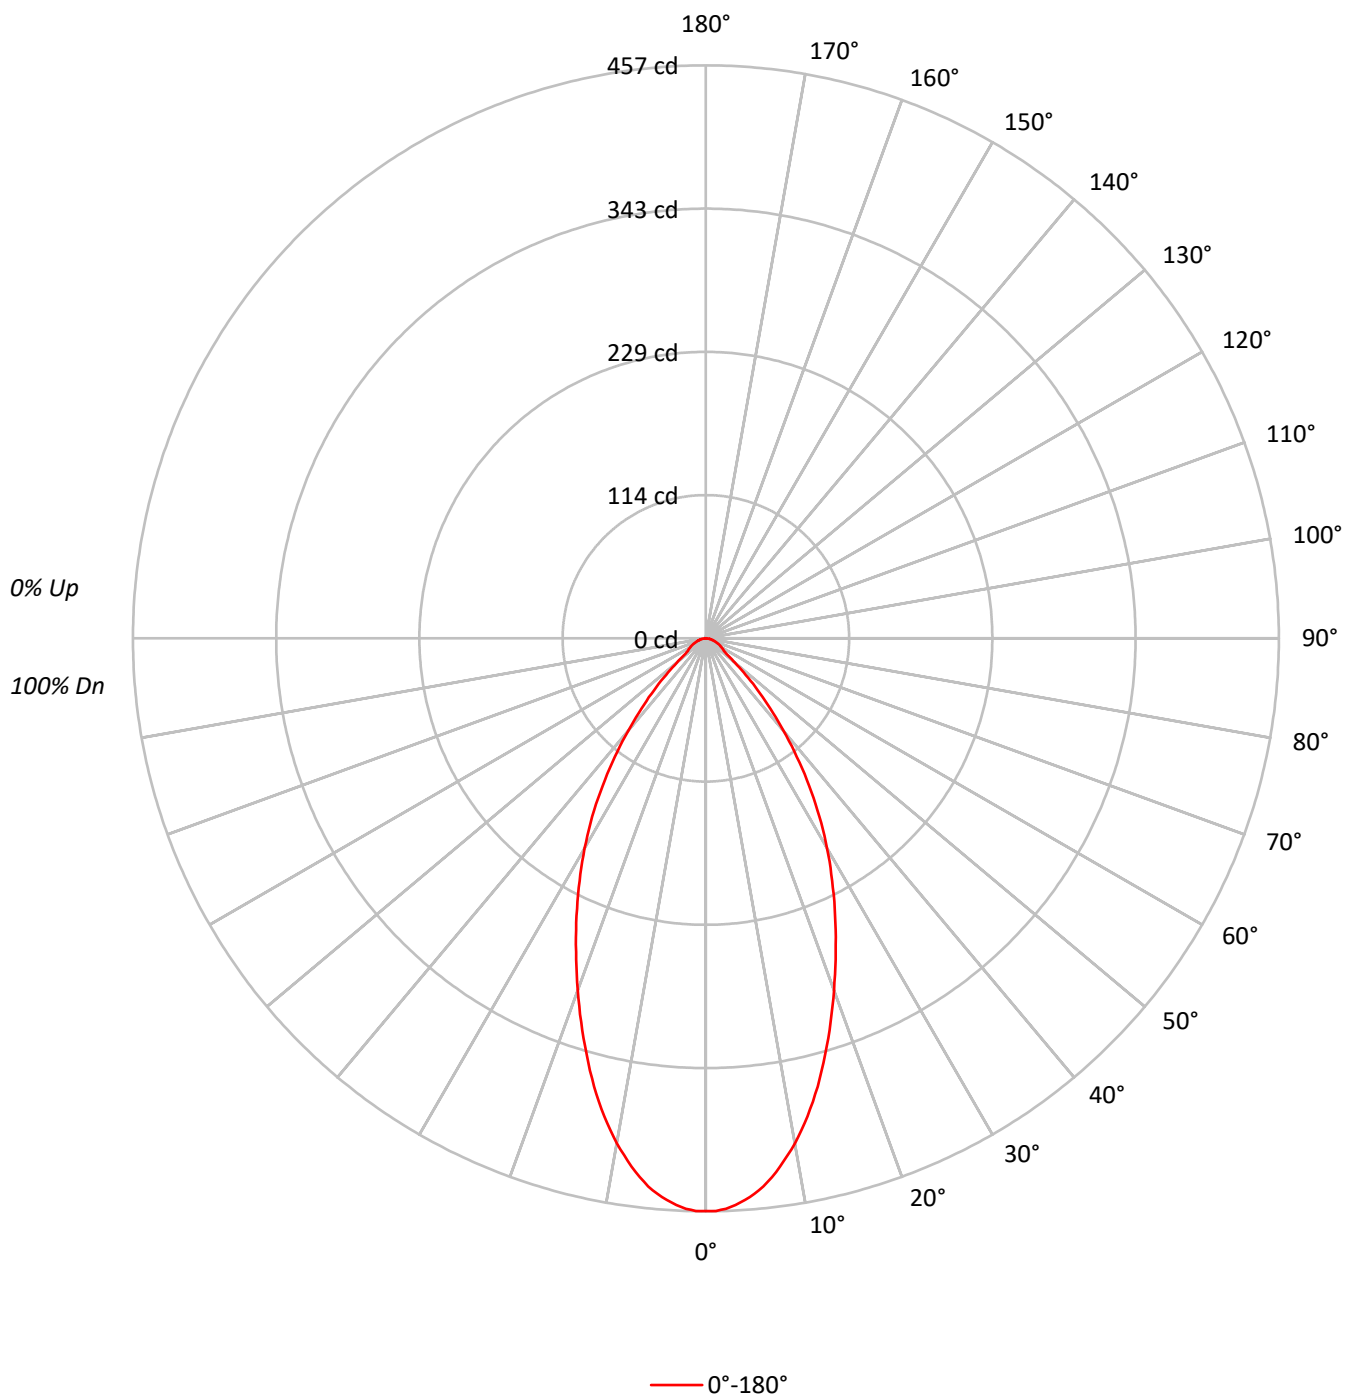

TEST NUMBER: P1259977

CATALOG NUMBER: P3AS13R309050DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	85	79	74	92	84	79	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	100167
5°	97909
10°	91047
15°	81022
20°	69679
25°	59036
30°	48995
35°	38441
40°	27566
45°	18079
50°	10302
55°	6767
60°	6403
65°	5915
70°	5321
75°	4829
80°	4546
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18079 cd/sqm

TEST NUMBER: P1259977

CATALOG NUMBER: P3AS13R309050DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.3	9.7
10°-20°	99.2	23.4
20°-30°	111.8	26.4
30°-40°	89.3	21.1
40°-50°	45.9	10.8
50°-60°	17.3	4.1
60°-70°	11.3	2.7
70°-80°	6.1	1.4
80°-90°	1.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	252.3	59.5
0°-40°	341.6	80.6
0°-60°	404.8	95.5
0°-90°	424.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	424.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	457	
5°	445	41
15°	357	99
25°	244	112
35°	144	89
45°	58	46
55°	18	17
65°	11	11
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1259977

CATALOG NUMBER: P3AS13R309050DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	456.8
1°	456.8
2°	455.3
3°	452.7
4°	449.0
5°	444.8
6°	439.6
7°	432.9
8°	425.6
9°	417.3
10°	408.9
11°	399.6
12°	389.7
13°	379.3
14°	368.4
15°	356.9
17.5°	327.8
20°	298.6
22.5°	270.6
25°	244.0
27.5°	218.0
30°	193.5
32.5°	168.6
35°	143.6
37.5°	119.1
40°	96.3
42.5°	76.0
45°	58.3
47.5°	43.2
50°	30.2
52.5°	21.3
55°	17.7
57.5°	16.1
60°	14.6
62.5°	13.0
65°	11.4
67.5°	9.9
70°	8.3
72.5°	6.8
75°	5.7
77.5°	4.7
80°	3.6
82.5°	2.6
85°	1.6
87.5°	0.5



TEST NUMBER: P1259977

CATALOG NUMBER: P3AS13R309050DE010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)