

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1259994

Luminaire Tested: P3AS13R359050DE010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1259994
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R359050DE010 E3CB1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 5000K CCT AND, 90CRI , E3CB1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1348.0 lumens
Efficiency: N/A
Efficacy: 92.3 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1259994

CATALOG NUMBER: P3AS13R359050DE010 E3CB1MW

Luminous Intensity Polar Plot

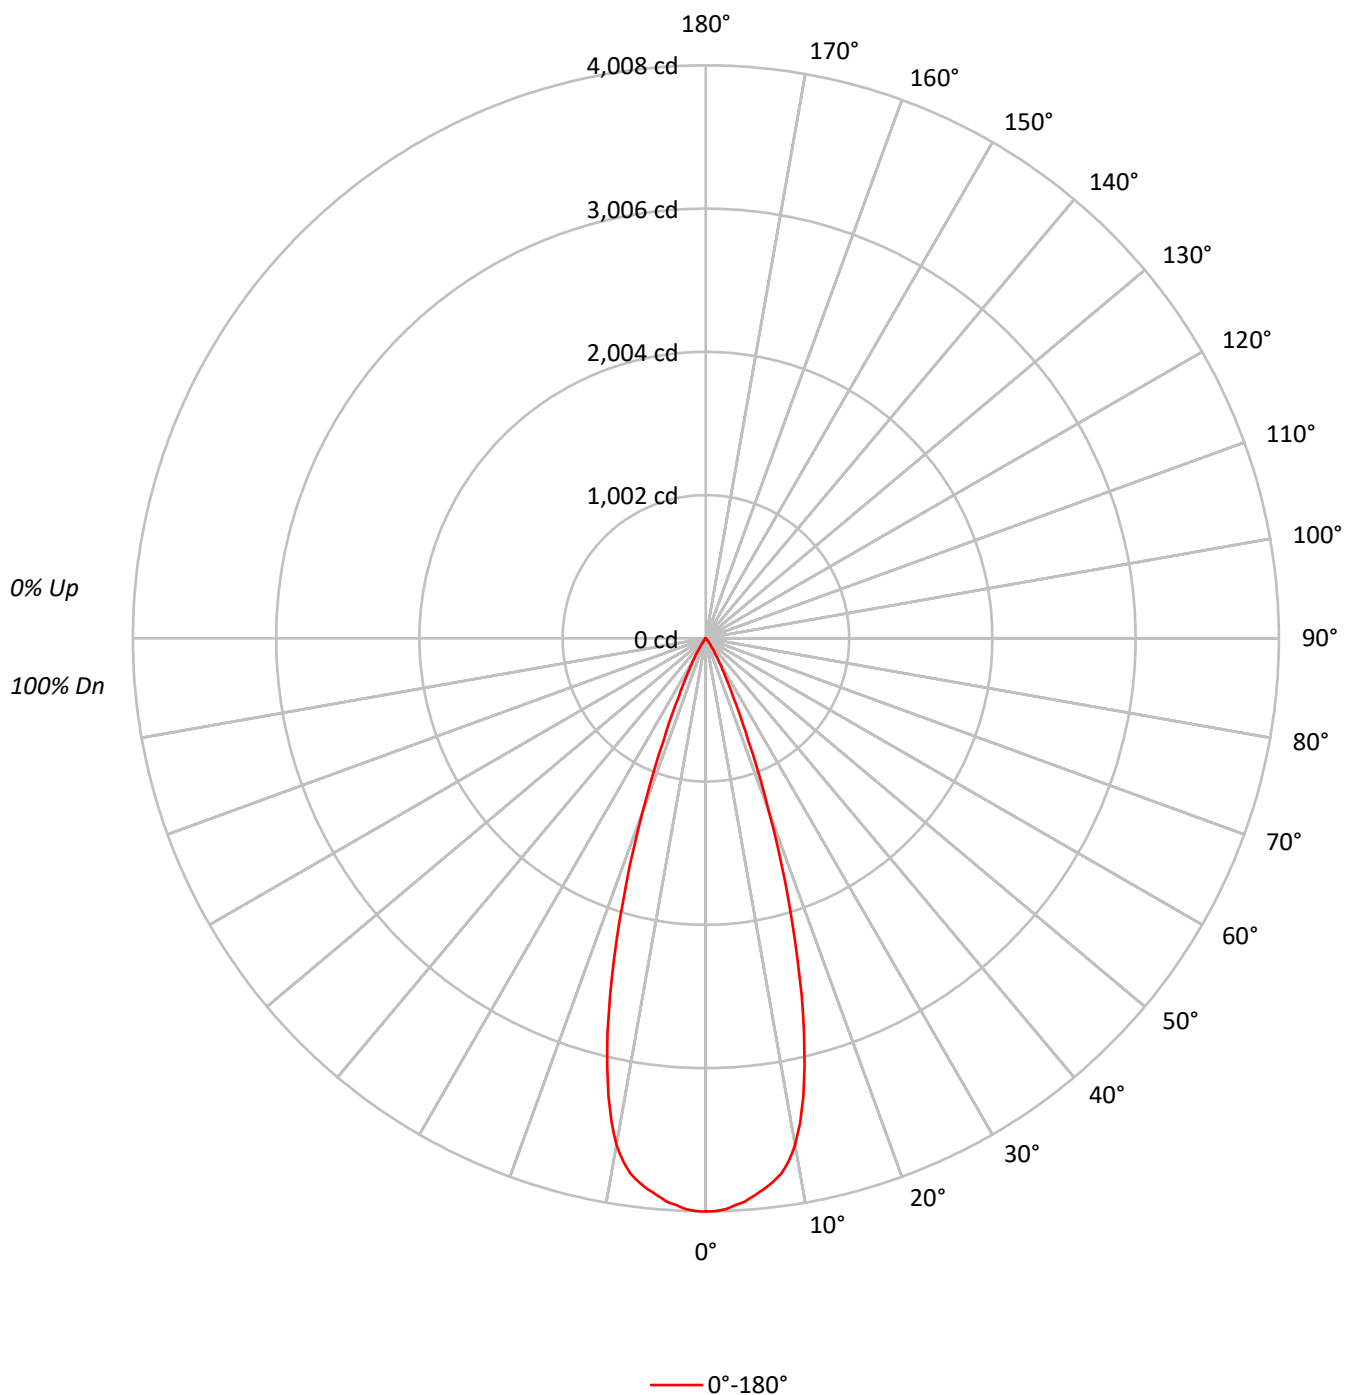



TEST NUMBER: P1259994

CATALOG NUMBER: P3AS13R359050DE010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99	99	98	96
2	111	107	104	101	109	105	103	100	102	100	98		99	98	96		97	95	94	93
3	107	102	98	95	105	101	97	95	98	96	93		96	94	92		94	92	90	89
4	104	98	94	91	102	97	93	90	95	92	89		93	90	88		91	89	87	86
5	100	94	90	87	99	93	89	86	92	88	86		90	87	85		89	86	84	83
6	97	91	86	83	96	90	86	83	89	85	82		87	84	82		86	83	81	80
7	94	87	83	80	93	87	83	80	86	82	79		85	81	79		84	81	79	78
8	91	84	80	77	90	84	80	77	83	79	77		82	79	76		81	78	76	75
9	89	82	77	74	88	81	77	74	80	77	74		80	76	74		79	76	74	73
10	86	79	75	72	85	79	75	72	78	74	72		77	74	72		77	74	71	70

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	878987
5°	861081
10°	801076
15°	587291
20°	300723
25°	108393
30°	42209
35°	14777
40°	6069
45°	1644
50°	1433
55°	1606
60°	1403
65°	1090
70°	1346
75°	1779
80°	1389
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 82.5°
Luminance: 1848 cd/sqm

TEST NUMBER: P1259994

CATALOG NUMBER: P3AS13R359050DE010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	364.7	27.1
10°-20°	684.2	50.8
20°-30°	242.3	18.0
30°-40°	42.4	3.1
40°-50°	6.2	0.5
50°-60°	3.4	0.3
60°-70°	2.5	0.2
70°-80°	1.8	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1291.2	95.8
0°-40°	1333.6	98.9
0°-60°	1343.2	99.6
0°-90°	1348.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1348.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4008	
5°	3912	365
15°	2587	684
25°	448	242
35°	55	42
45°	5	6
55°	4	3
65°	2	2
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1259994

CATALOG NUMBER: P3AS13R359050DE010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	4008.5
1°	4007.4
2°	3994.7
3°	3970.3
4°	3948.0
5°	3911.9
6°	3874.7
7°	3833.3
8°	3782.4
9°	3702.8
10°	3597.7
11°	3452.2
12°	3277.1
13°	3069.0
14°	2839.7
15°	2587.0
17.5°	1926.8
20°	1288.7
22.5°	777.1
25°	448.0
27.5°	267.5
30°	166.7
32.5°	96.6
35°	55.2
37.5°	35.0
40°	21.2
42.5°	10.6
45°	5.3
47.5°	4.2
50°	4.2
52.5°	4.2
55°	4.2
57.5°	3.2
60°	3.2
62.5°	3.2
65°	2.1
67.5°	2.1
70°	2.1
72.5°	2.1
75°	2.1
77.5°	1.1
80°	1.1
82.5°	1.1
85°	0.0
87.5°	0.0



TEST NUMBER: P1259994

CATALOG NUMBER: P3AS13R359050DE010 E3CB1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)