

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260043

Luminaire Tested: P3AS13R409050DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260043
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R409050DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 5000K CCT AND, 90CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 382.0 lumens
Efficiency: N/A
Efficacy: 26.2 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260043

CATALOG NUMBER: P3AS13R409050DE010 E3DLP1GPH

Luminous Intensity Polar Plot

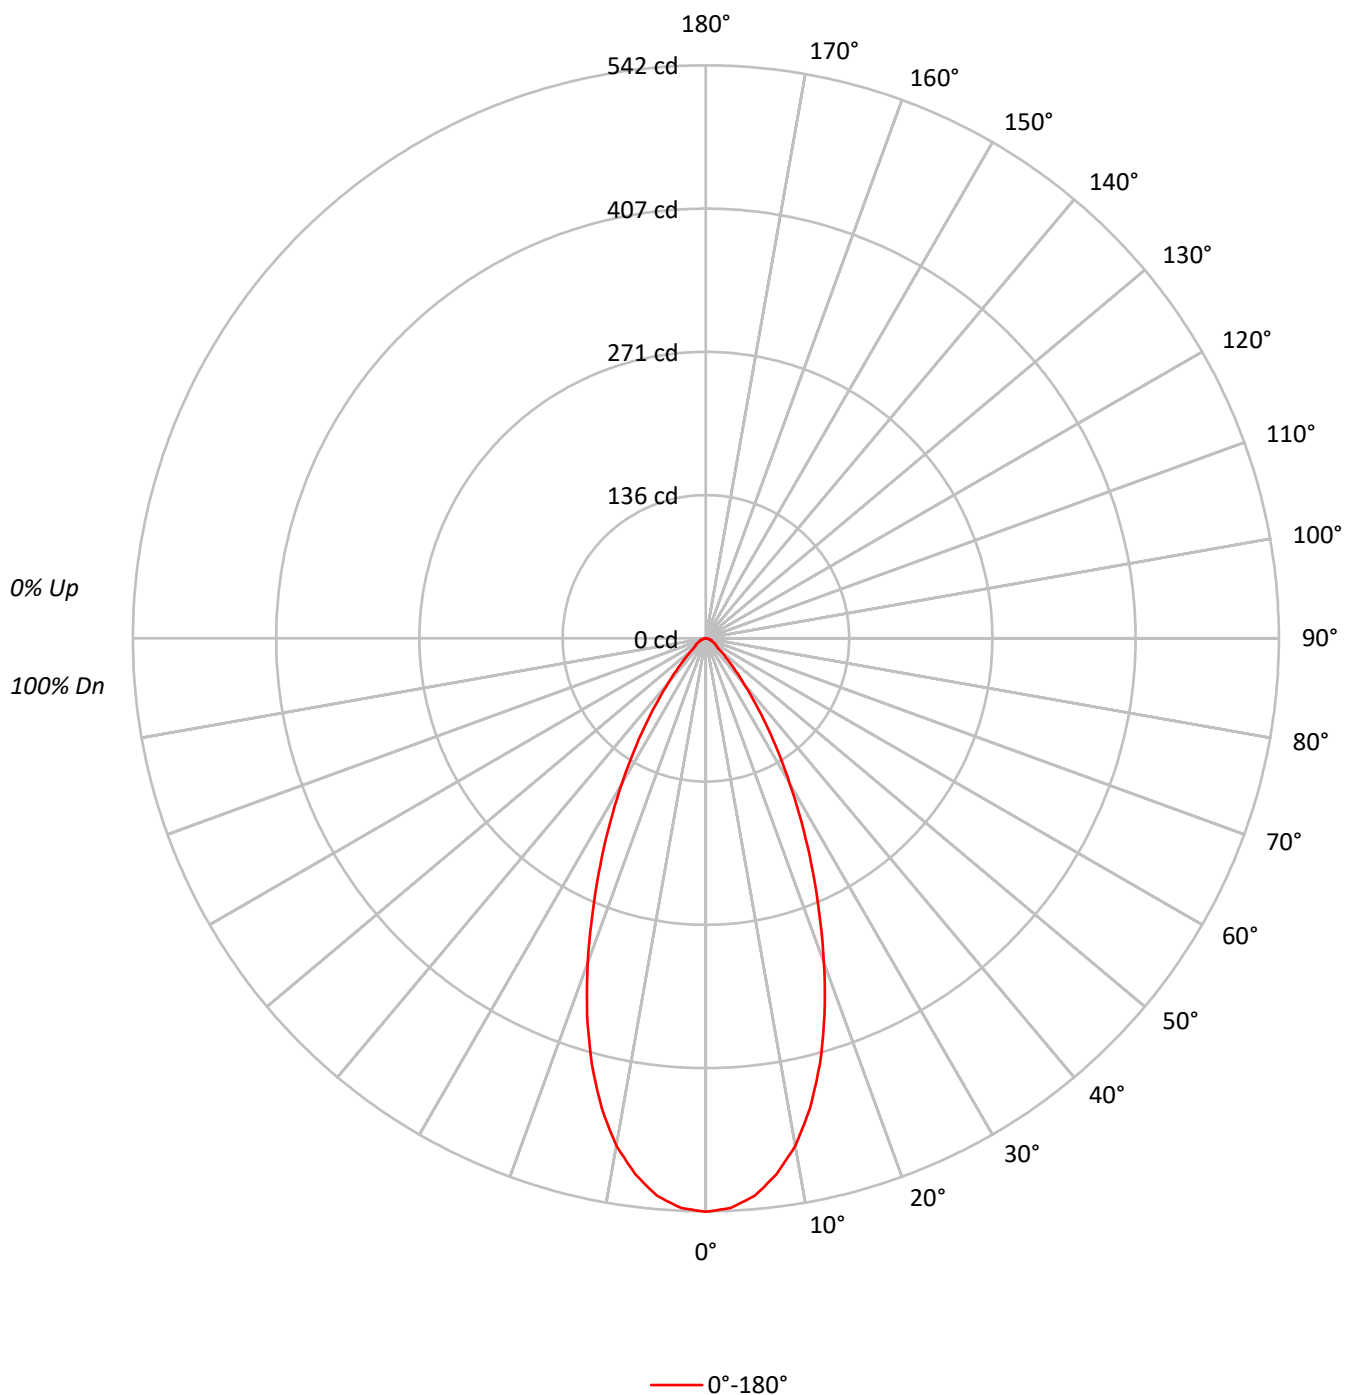

TEST NUMBER: P1260043

CATALOG NUMBER: P3AS13R409050DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	93	97	94	91		94	92	89		92
3	102	95	90	86	100	94	89	85	91	87	84		89	85	83		86
4	97	89	83	79	95	88	83	79	86	81	78		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	78	72	68	76	71	67		75	70	67		73
7	83	74	68	64	82	73	68	63	72	67	63		71	66	63		70
8	79	70	64	60	78	69	64	60	68	63	59		67	63	59		66
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	62	57	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	118938
5°	116531
10°	108504
15°	94575
20°	76213
25°	57124
30°	40158
35°	26314
40°	15916
45°	9520
50°	5663
55°	4588
60°	4122
65°	3528
70°	3334
75°	2626
80°	2652
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 9520 cd/sqm

TEST NUMBER: P1260043

CATALOG NUMBER: P3AS13R409050DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.2	12.9
10°-20°	114.7	30.0
20°-30°	108.1	28.3
30°-40°	62.5	16.4
40°-50°	24.9	6.5
50°-60°	11.0	2.9
60°-70°	6.8	1.8
70°-80°	3.6	0.9
80°-90°	1.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	272.0	71.2
0°-40°	334.5	87.6
0°-60°	370.5	97.0
0°-90°	382.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	382.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	542	
5°	529	49
15°	417	115
25°	236	108
35°	98	63
45°	31	25
55°	12	11
65°	7	7
75°	3	4
85°	1	1
90°	0	

TEST NUMBER: P1260043

CATALOG NUMBER: P3AS13R409050DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	542.4
2.5°	539.3
5°	529.4
7.5°	511.2
10°	487.3
12.5°	455.1
15°	416.6
17.5°	373.4
20°	326.6
22.5°	279.8
25°	236.1
27.5°	195.5
30°	158.6
32.5°	126.4
35°	98.3
37.5°	74.4
40°	55.6
42.5°	41.6
45°	30.7
47.5°	22.4
50°	16.6
52.5°	13.5
55°	12.0
57.5°	10.9
60°	9.4
62.5°	7.8
65°	6.8
67.5°	5.7
70°	5.2
72.5°	4.2
75°	3.1
77.5°	2.6
80°	2.1
82.5°	1.6
85°	1.0
87.5°	0.5
90°	0.0

(END OF REPORT)