

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260131

Luminaire Tested: P3AS13R559050DE010 E3DLP1WMH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1260131  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R559050DE010 E3DLP1WMH  
Description: 3in Adjustable LED luminaire with, R55 optic, 5000K CCT AND, 90CRI , E3DLP1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 772.0 lumens  
Efficiency: N/A  
Efficacy: 52.9 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1260131  
CATALOG NUMBER: P3AS13R559050DE010 E3DLP1WMH

### Luminous Intensity Polar Plot

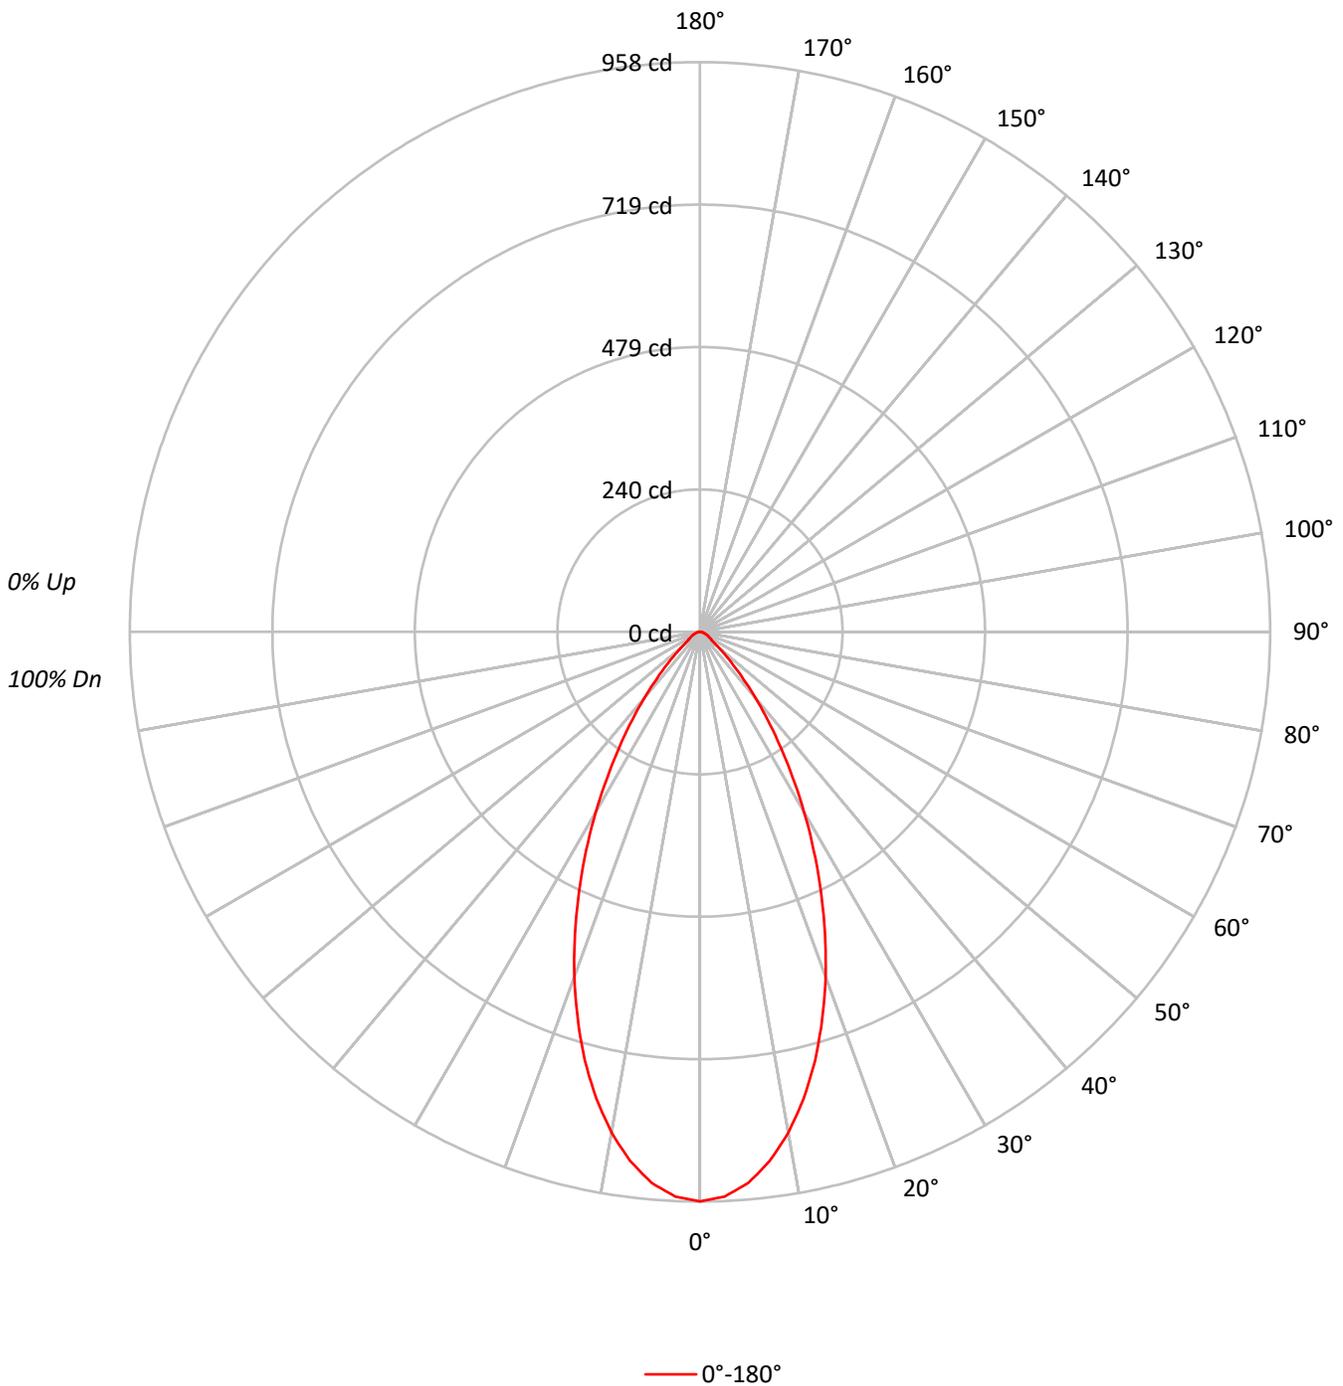



TEST NUMBER: P1260131  
 CATALOG NUMBER: P3AS13R559050DE010 E3DLP1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     | 0   |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1   | 113 | 110 | 107 | 105 | 110 | 108 | 105 | 103 | 104 | 102 | 100 | 100 | 98  | 97  | 97  | 95  | 94  | 92  | 92  | 92  | 92  |
| 2   | 107 | 102 | 97  | 94  | 105 | 100 | 96  | 93  | 97  | 93  | 91  | 94  | 91  | 89  | 91  | 89  | 87  | 85  | 85  | 85  | 85  |
| 3   | 101 | 94  | 89  | 85  | 99  | 93  | 88  | 84  | 90  | 86  | 83  | 88  | 84  | 81  | 85  | 83  | 80  | 79  | 79  | 79  | 79  |
| 4   | 96  | 88  | 82  | 77  | 94  | 87  | 81  | 77  | 84  | 80  | 76  | 82  | 78  | 75  | 80  | 77  | 74  | 73  | 73  | 73  | 73  |
| 5   | 91  | 82  | 76  | 71  | 89  | 81  | 75  | 71  | 79  | 74  | 70  | 77  | 73  | 70  | 76  | 72  | 69  | 67  | 67  | 67  | 67  |
| 6   | 86  | 77  | 70  | 66  | 84  | 76  | 70  | 66  | 74  | 69  | 65  | 73  | 68  | 65  | 72  | 68  | 64  | 63  | 63  | 63  | 63  |
| 7   | 82  | 72  | 66  | 61  | 80  | 71  | 65  | 61  | 70  | 65  | 61  | 69  | 64  | 60  | 68  | 63  | 60  | 59  | 59  | 59  | 59  |
| 8   | 78  | 68  | 62  | 57  | 76  | 67  | 61  | 57  | 66  | 61  | 57  | 65  | 60  | 57  | 64  | 60  | 56  | 55  | 55  | 55  | 55  |
| 9   | 74  | 64  | 58  | 54  | 73  | 63  | 58  | 54  | 62  | 57  | 53  | 62  | 57  | 53  | 61  | 56  | 53  | 52  | 52  | 52  | 52  |
| 10  | 70  | 60  | 55  | 51  | 69  | 60  | 54  | 50  | 59  | 54  | 50  | 58  | 54  | 50  | 58  | 53  | 50  | 49  | 49  | 49  | 49  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 210005 |
| 5°  | 204732 |
| 10° | 190333 |
| 15° | 169513 |
| 20° | 144049 |
| 25° | 116233 |
| 30° | 88621  |
| 35° | 63042  |
| 40° | 41592  |
| 45° | 24654  |
| 50° | 14464  |
| 55° | 8908   |
| 60° | 7894   |
| 65° | 7160   |
| 70° | 6091   |
| 75° | 5422   |
| 80° | 5304   |
| 85° | 5284   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 24654 cd/sqm



TEST NUMBER: P1260131  
 CATALOG NUMBER: P3AS13R559050DE010 E3DLP1WMH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 86.4   | 11.2      |
| 10°-20°   | 207.0  | 26.8      |
| 20°-30°   | 219.2  | 28.4      |
| 30°-40°   | 148.2  | 19.2      |
| 40°-50°   | 64.9   | 8.4       |
| 50°-60°   | 23.2   | 3.0       |
| 60°-70°   | 13.6   | 1.8       |
| 70°-80°   | 7.1    | 0.9       |
| 80°-90°   | 2.3    | 0.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 512.6  | 66.4      |
| 0°-40°    | 660.7  | 85.6      |
| 0°-60°    | 748.9  | 97.0      |
| 0°-90°    | 772.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 772.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 958 |      |
| 5°  | 930 | 86   |
| 15° | 747 | 207  |
| 25° | 480 | 219  |
| 35° | 236 | 148  |
| 45° | 80  | 65   |
| 55° | 23  | 23   |
| 65° | 14  | 14   |
| 75° | 6   | 7    |
| 85° | 2   | 2    |
| 90° | 0   |      |



TEST NUMBER: P1260131  
CATALOG NUMBER: P3AS13R559050DE010 E3DLP1WMH

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 957.7 |
| 2.5°  | 950.3 |
| 5°    | 930.1 |
| 7.5°  | 897.3 |
| 10°   | 854.8 |
| 12.5° | 803.9 |
| 15°   | 746.7 |
| 17.5° | 683.0 |
| 20°   | 617.3 |
| 22.5° | 548.3 |
| 25°   | 480.4 |
| 27.5° | 413.6 |
| 30°   | 350.0 |
| 32.5° | 289.5 |
| 35°   | 235.5 |
| 37.5° | 186.7 |
| 40°   | 145.3 |
| 42.5° | 109.2 |
| 45°   | 79.5  |
| 47.5° | 58.3  |
| 50°   | 42.4  |
| 52.5° | 29.7  |
| 55°   | 23.3  |
| 57.5° | 21.2  |
| 60°   | 18.0  |
| 62.5° | 15.9  |
| 65°   | 13.8  |
| 67.5° | 11.7  |
| 70°   | 9.5   |
| 72.5° | 8.5   |
| 75°   | 6.4   |
| 77.5° | 5.3   |
| 80°   | 4.2   |
| 82.5° | 3.2   |
| 85°   | 2.1   |
| 87.5° | 1.1   |
| 90°   | 0.0   |

(END OF REPORT)