

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260238

Luminaire Tested: P3AS17R129050DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260238
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R129050DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R12 optic, 5000K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 914.0 lumens
Efficiency: N/A
Efficacy: 39.9 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 22.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260238

CATALOG NUMBER: P3AS17R129050DE010 E3DLD1WMH

Luminous Intensity Polar Plot

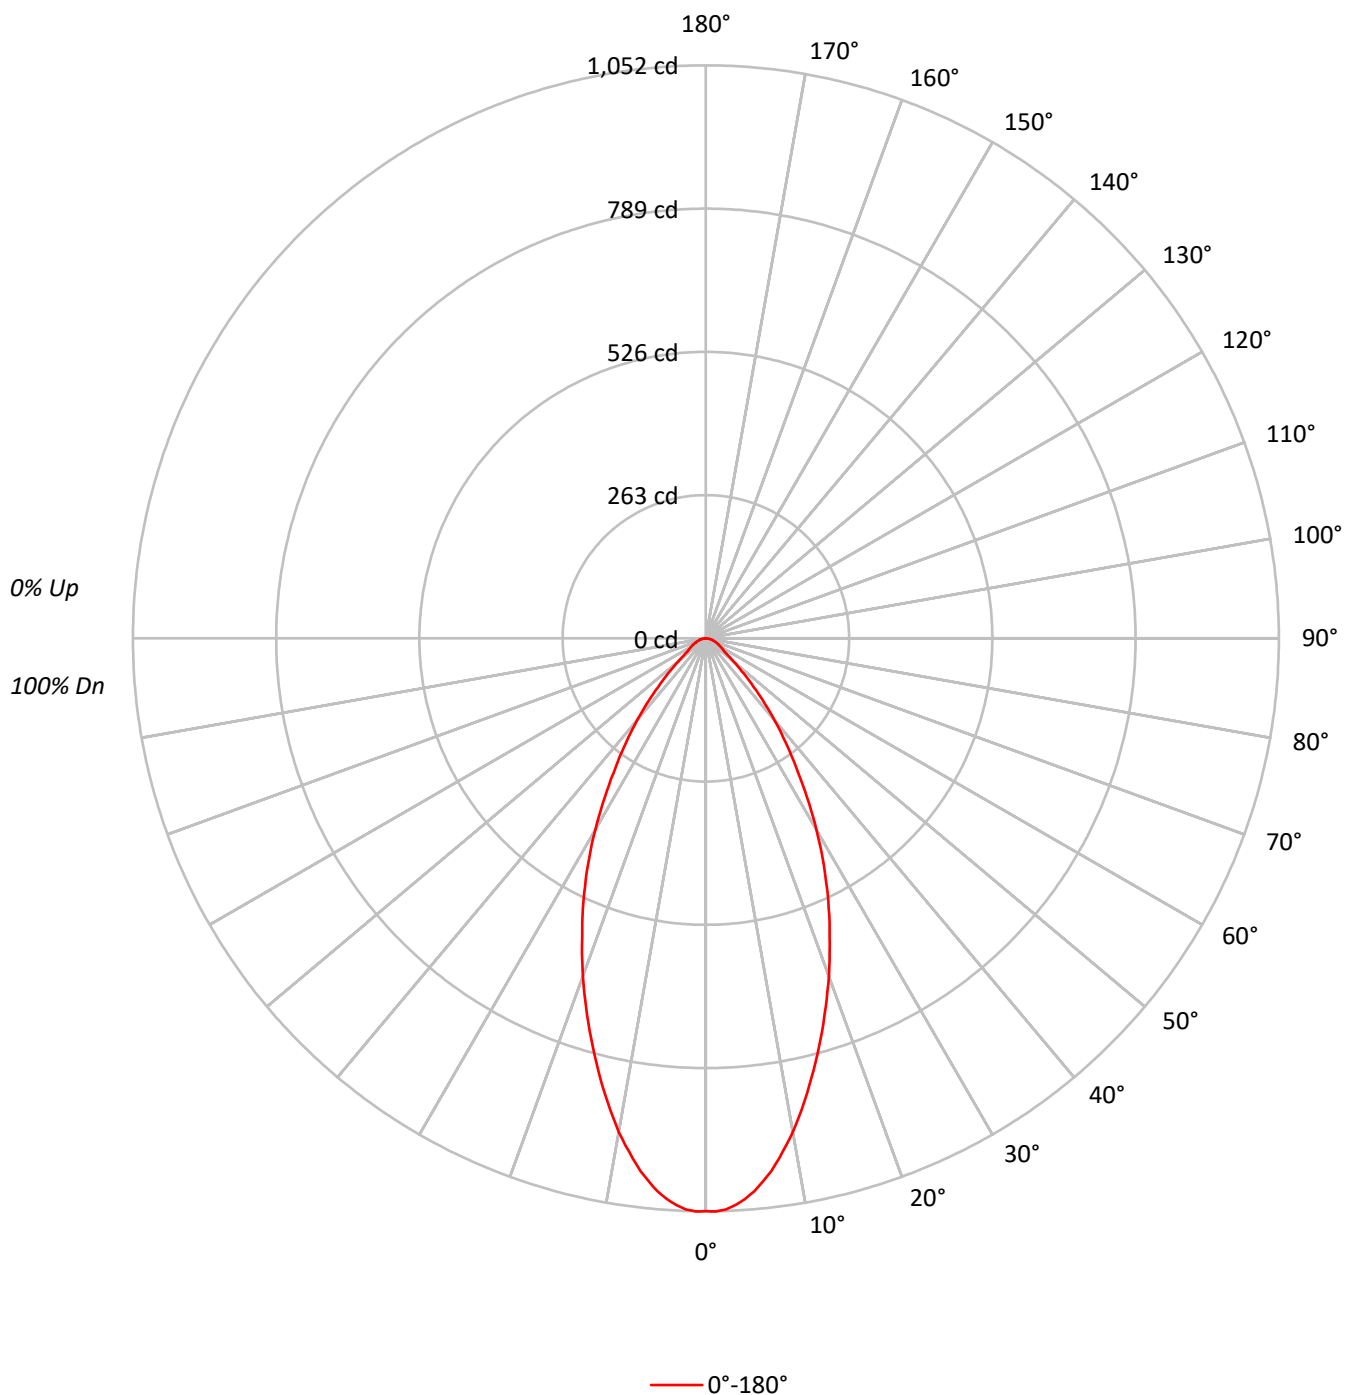



TEST NUMBER: P1260238

CATALOG NUMBER: P3AS17R129050DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	109	106	104		110	107	105	102		103	101	99		99	98	96		96	95	93
2	106	100	96	92		104	99	95	91		95	92	89		92	90	87		90	87	85
3	100	93	87	83		98	91	86	82		89	84	81		86	82	79		84	81	78
4	94	86	80	75		92	85	79	74		82	77	73		80	76	73		78	75	72
5	89	80	73	68		87	79	73	68		77	72	67		75	70	67		74	69	66
6	84	74	68	63		83	73	67	63		72	66	62		70	66	62		69	65	61
7	80	69	63	58		78	69	63	58		67	62	58		66	61	57		65	61	57
8	76	65	59	54		74	65	58	54		63	58	54		62	57	54		61	57	53
9	72	61	55	51		71	61	55	51		60	54	50		59	54	50		58	53	50
10	68	58	52	48		67	57	51	47		57	51	47		56	51	47		55	50	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	230552
5°	224279
10°	204962
15°	179524
20°	154013
25°	128596
30°	102902
35°	77176
40°	56019
45°	36624
50°	22925
55°	15483
60°	13727
65°	12608
70°	11861
75°	10760
80°	10229
85°	8806

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 36624 cd/sqm

TEST NUMBER: P1260238

CATALOG NUMBER: P3AS17R129050DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.0	10.3
10°-20°	220.3	24.1
20°-30°	242.8	26.6
30°-40°	181.8	19.9
40°-50°	94.3	10.3
50°-60°	39.1	4.3
60°-70°	24.2	2.6
70°-80°	13.6	1.5
80°-90°	4.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	557.2	61.0
0°-40°	739.0	80.8
0°-60°	872.3	95.4
0°-90°	914.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	914.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1051	
5°	1019	94
15°	791	220
25°	532	243
35°	288	182
45°	118	94
55°	40	39
65°	24	24
75°	13	14
85°	4	4
90°	0	

TEST NUMBER: P1260238

CATALOG NUMBER: P3AS17R129050DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1051.4
1°	1052.5
2°	1049.1
3°	1042.1
4°	1031.7
5°	1018.9
6°	1002.7
7°	985.4
8°	964.5
9°	942.5
10°	920.5
12.5°	856.8
15°	790.8
17.5°	724.8
20°	660.0
22.5°	594.0
25°	531.5
27.5°	468.9
30°	406.4
32.5°	345.1
35°	288.3
37.5°	239.7
40°	195.7
42.5°	155.2
45°	118.1
47.5°	89.2
50°	67.2
52.5°	49.8
55°	40.5
57.5°	35.9
60°	31.3
62.5°	27.8
65°	24.3
67.5°	20.8
70°	18.5
72.5°	15.1
75°	12.7
77.5°	10.4
80°	8.1
82.5°	5.8
85°	3.5
87.5°	1.2
90°	0.0

(END OF REPORT)