

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260294

Luminaire Tested: P3AS17R209050DE010 E3DLD1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1260294  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R209050DE010 E3DLD1GPH  
Description: 3in Adjustable LED luminaire with, R20 optic, 5000K CCT AND, 90CRI , E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 543.0 lumens  
Efficiency: N/A  
Efficacy: 25.6 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 21.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1260294  
CATALOG NUMBER: P3AS17R209050DE010 E3DLD1GPH

### Luminous Intensity Polar Plot

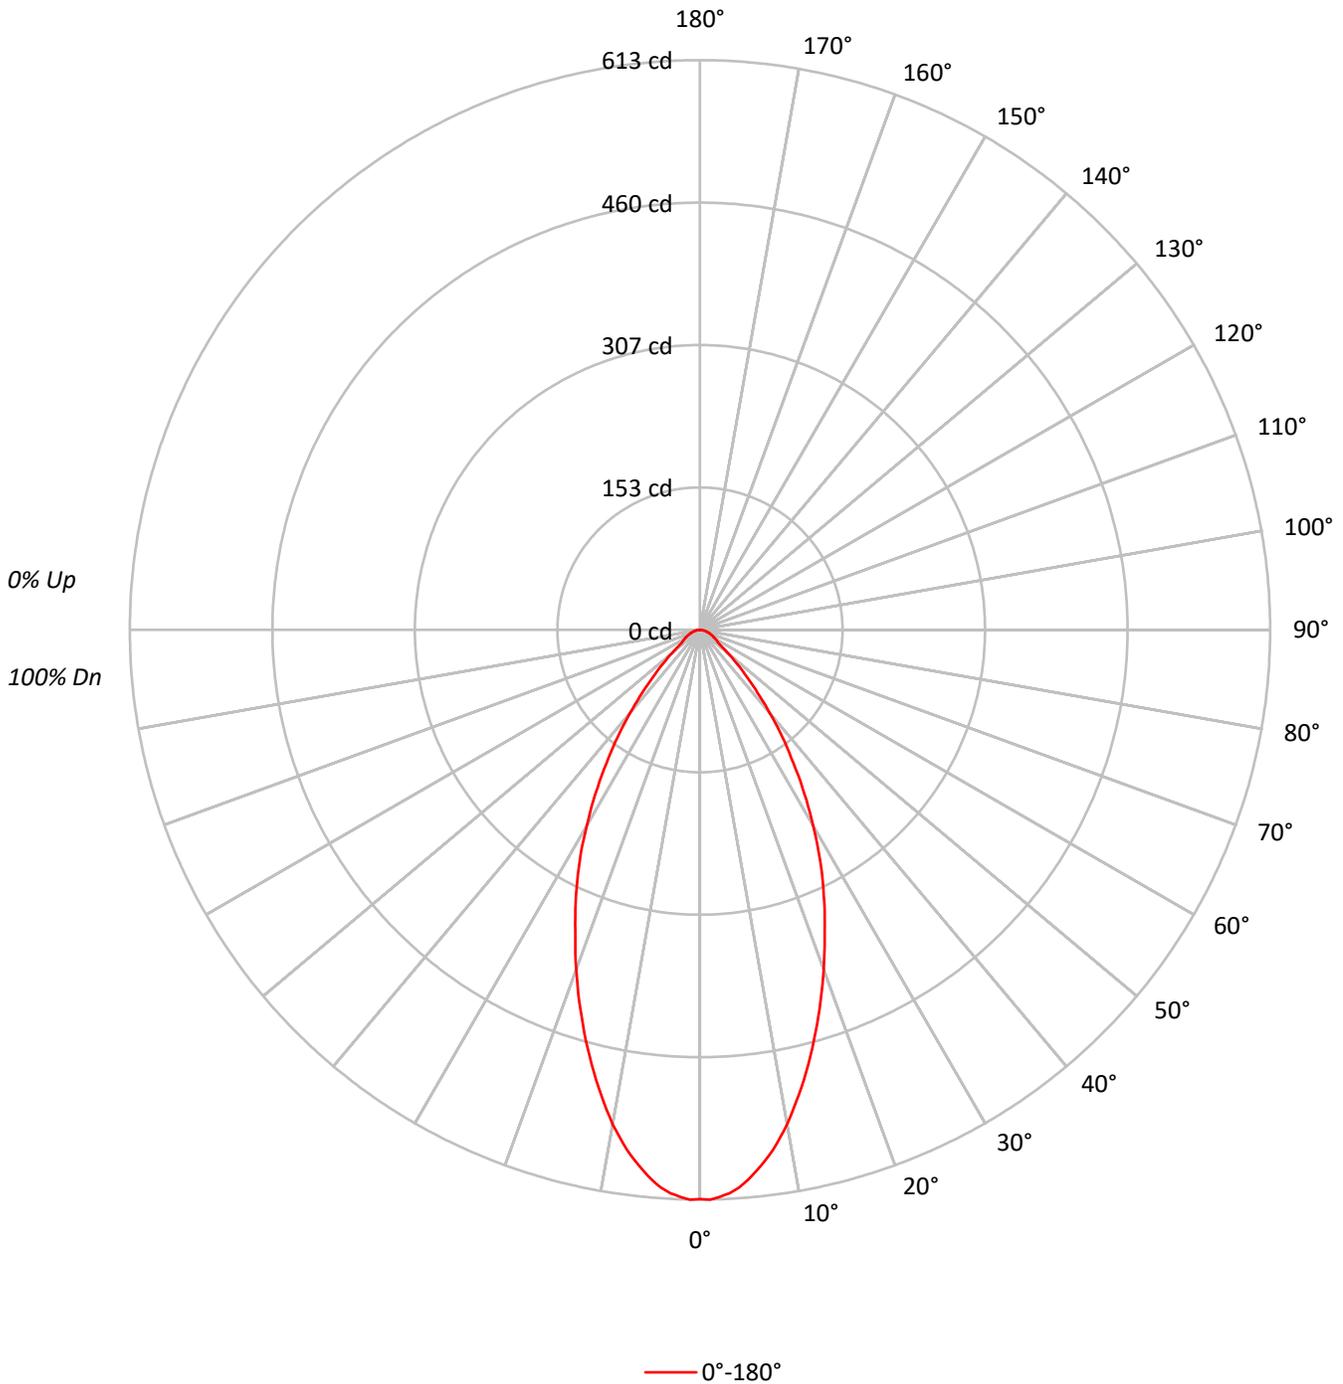



TEST NUMBER: P1260294  
 CATALOG NUMBER: P3AS17R209050DE010 E3DLD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83			83
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76			76
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70			70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65			65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60			60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55			55
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52			52
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48			48
10	68	58	51	47	67	57	51	47	56	51	47	56	51	47	55	50	47	45			45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	134309
5°	130728
10°	120261
15°	105858
20°	90775
25°	76262
30°	61655
35°	46900
40°	33377
45°	22018
50°	13646
55°	8984
60°	8157
65°	7524
70°	7052
75°	6439
80°	6061
85°	5284

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 22018 cd/sqm



TEST NUMBER: P1260294  
 CATALOG NUMBER: P3AS17R209050DE010 E3DLD1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	54.9	10.1
10°-20°	129.8	23.9
20°-30°	144.1	26.5
30°-40°	109.9	20.2
40°-50°	56.3	10.4
50°-60°	23.1	4.3
60°-70°	14.4	2.7
70°-80°	8.1	1.5
80°-90°	2.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	328.8	60.6
0°-40°	438.7	80.8
0°-60°	518.1	95.4
0°-90°	543.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	543.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	612	
5°	594	55
15°	466	130
25°	315	144
35°	175	110
45°	71	56
55°	24	23
65°	14	14
75°	8	8
85°	2	2
90°	0	



TEST NUMBER: P1260294  
CATALOG NUMBER: P3AS17R209050DE010 E3DLD1GPH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	612.5
1°	613.2
2°	610.4
3°	607.0
4°	601.5
5°	593.9
6°	584.9
7°	575.3
8°	564.9
9°	552.5
10°	540.1
12.5°	504.2
15°	466.3
17.5°	427.7
20°	389.0
22.5°	350.4
25°	315.2
27.5°	280.0
30°	243.5
32.5°	209.0
35°	175.2
37.5°	145.5
40°	116.6
42.5°	91.7
45°	71.0
47.5°	53.8
50°	40.0
52.5°	29.7
55°	23.5
57.5°	21.4
60°	18.6
62.5°	16.6
65°	14.5
67.5°	12.4
70°	11.0
72.5°	9.0
75°	7.6
77.5°	6.2
80°	4.8
82.5°	3.4
85°	2.1
87.5°	0.7
90°	0.0

(END OF REPORT)