

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260304

Luminaire Tested: P3AS17R259050DE010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260304
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R259050DE010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R25 optic, 5000K CCT AND, 90CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1790.0 lumens
Efficiency: N/A
Efficacy: 84.4 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260304

CATALOG NUMBER: P3AS17R259050DE010 E3CB1MB

Luminous Intensity Polar Plot

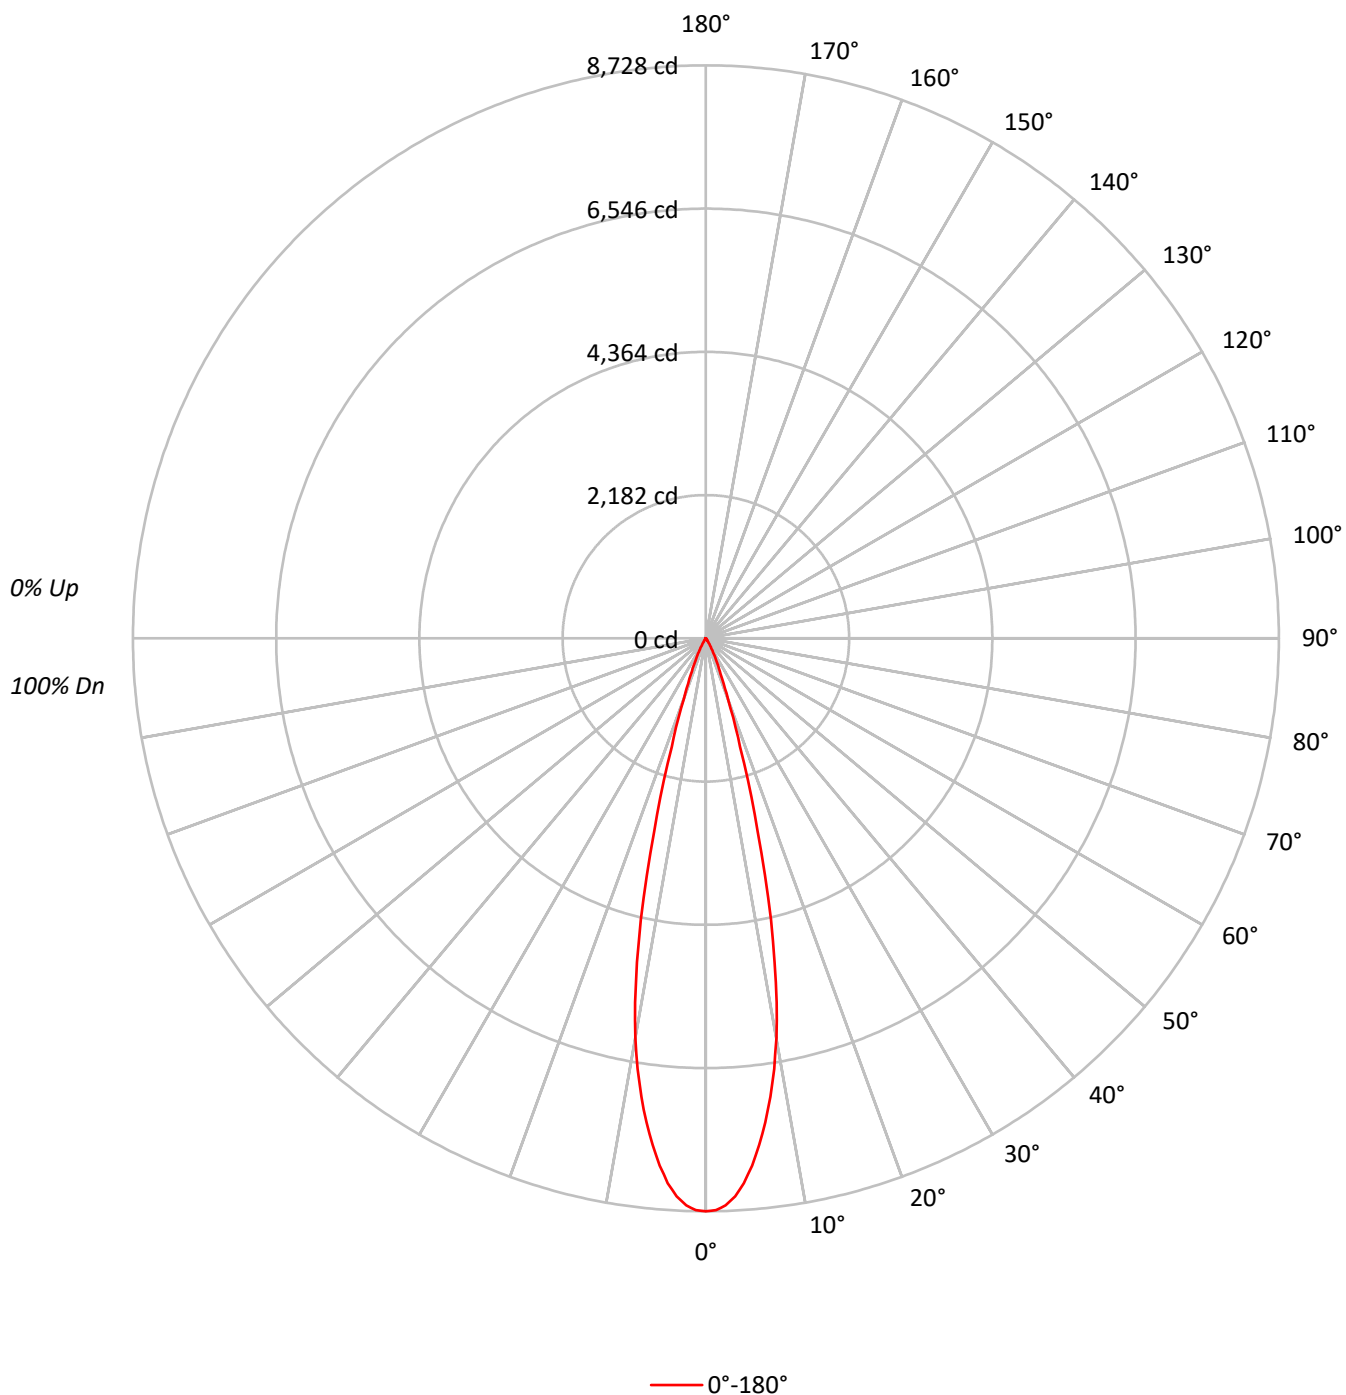

TEST NUMBER: P1260304

CATALOG NUMBER: P3AS17R259050DE010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	96	96
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	93	93
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	91	91
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	88	88
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	86	86
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	84	84
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	82	82
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	80	80
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	78	78
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1913772
5°	1774968
10°	1376528
15°	690220
20°	226773
25°	90175
30°	33828
35°	9798
40°	4437
45°	1737
50°	1433
55°	1070
60°	1228
65°	1453
70°	898
75°	1186
80°	1768
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 1768 cd/sqm

TEST NUMBER: P1260304

CATALOG NUMBER: P3AS17R259050DE010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	709.3	39.6
10°-20°	846.2	47.3
20°-30°	190.8	10.7
30°-40°	30.9	1.7
40°-50°	5.6	0.3
50°-60°	3.0	0.2
60°-70°	2.6	0.1
70°-80°	1.5	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1746.2	97.6
0°-40°	1777.1	99.3
0°-60°	1785.7	99.8
0°-90°	1790.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1790.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8728	
5°	8064	709
15°	3040	846
25°	373	191
35°	37	31
45°	6	6
55°	3	3
65°	3	3
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1260304

CATALOG NUMBER: P3AS17R259050DE010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	8727.5
1°	8713.4
2°	8643.1
3°	8513.7
4°	8318.3
5°	8063.7
6°	7760.0
7°	7430.9
8°	7054.0
9°	6641.9
10°	6182.1
11°	5651.9
12°	5041.6
13°	4403.1
14°	3718.3
15°	3040.4
17.5°	1732.6
20°	971.8
22.5°	586.4
25°	372.7
27.5°	229.2
30°	133.6
32.5°	70.3
35°	36.6
37.5°	23.9
40°	15.5
42.5°	9.8
45°	5.6
47.5°	4.2
50°	4.2
52.5°	4.2
55°	2.8
57.5°	2.8
60°	2.8
62.5°	2.8
65°	2.8
67.5°	2.8
70°	1.4
72.5°	1.4
75°	1.4
77.5°	1.4
80°	1.4
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1260304

CATALOG NUMBER: P3AS17R259050DE010 E3CB1MB

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)