

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260369

Luminaire Tested: P3AS17R359050DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260369
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R359050DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R35 optic, 5000K CCT AND, 90CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1785.9 lumens
Efficiency: N/A
Efficacy: 84.2 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260369

CATALOG NUMBER: P3AS17R359050DE010 E3CB1MMS

Luminous Intensity Polar Plot

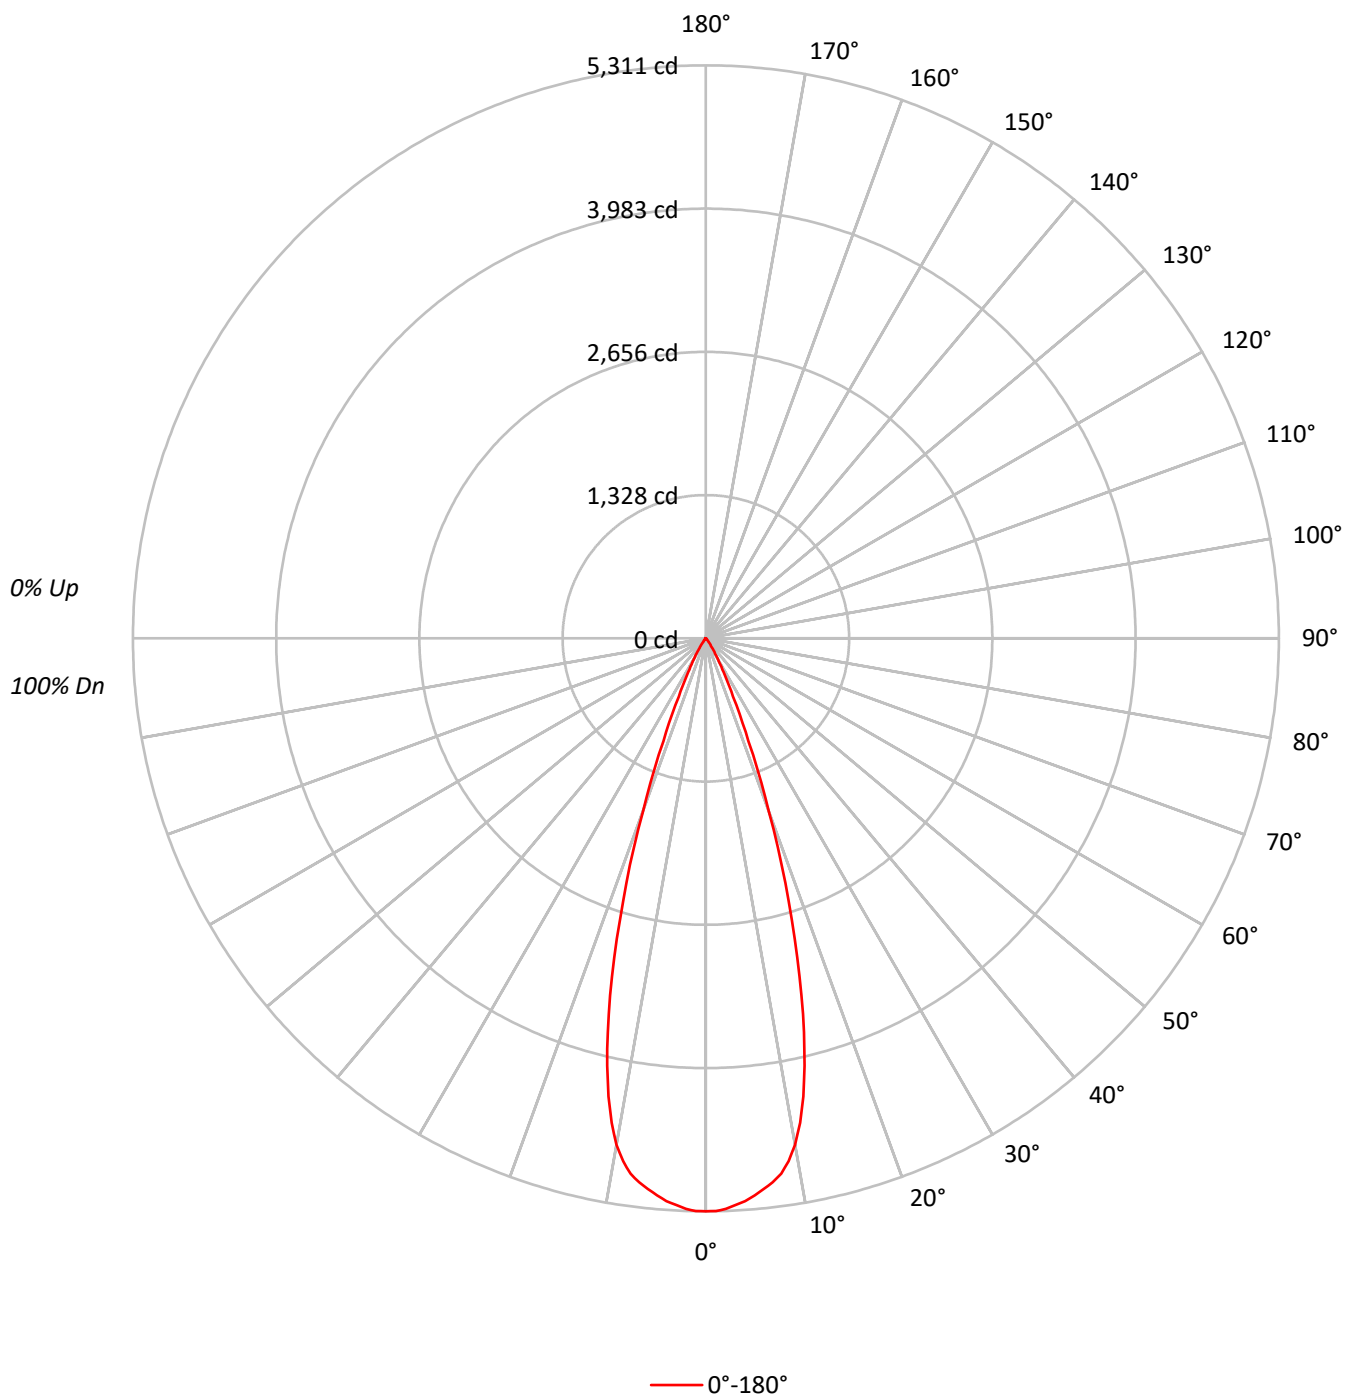

TEST NUMBER: P1260369

CATALOG NUMBER: P3AS17R359050DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	103	100	102	100	98		99	98	96		97
3	107	102	98	95	105	101	97	95	98	96	93		96	94	92		94
4	104	98	94	91	102	97	93	90	95	92	89		93	90	88		91
5	100	94	90	87	99	93	89	86	92	88	86		90	87	85		89
6	97	91	86	83	96	90	86	83	89	85	82		87	84	82		86
7	94	87	83	80	93	87	83	80	86	82	79		85	81	79		84
8	91	84	80	77	90	84	80	77	83	79	77		82	79	76		81
9	89	82	77	74	88	81	77	74	80	77	74		80	76	74		79
10	86	79	75	72	85	79	75	72	78	74	72		77	74	72		77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1164600
5°	1140873
10°	1061348
15°	778120
20°	398451
25°	143597
30°	55907
35°	19568
40°	8044
45°	2171
50°	1910
55°	2141
60°	1842
65°	1453
70°	1795
75°	2372
80°	1768
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 2372 cd/sqm

TEST NUMBER: P1260369

CATALOG NUMBER: P3AS17R359050DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	483.2	27.1
10°-20°	906.6	50.8
20°-30°	321.0	18.0
30°-40°	56.2	3.1
40°-50°	8.2	0.5
50°-60°	4.5	0.3
60°-70°	3.3	0.2
70°-80°	2.4	0.1
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1710.7	95.8
0°-40°	1766.9	98.9
0°-60°	1779.7	99.6
0°-90°	1785.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1785.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5311	
5°	5183	483
15°	3428	907
25°	594	321
35°	73	56
45°	7	8
55°	6	5
65°	3	3
75°	3	2
85°	0	1
90°	0	

TEST NUMBER: P1260369

CATALOG NUMBER: P3AS17R359050DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	5311.0
1°	5309.5
2°	5292.7
3°	5260.3
4°	5230.8
5°	5183.0
6°	5133.7
7°	5078.9
8°	5011.4
9°	4905.9
10°	4766.6
11°	4573.9
12°	4341.9
13°	4066.2
14°	3762.4
15°	3427.6
17.5°	2552.8
20°	1707.5
22.5°	1029.6
25°	593.5
27.5°	354.4
30°	220.8
32.5°	128.0
35°	73.1
37.5°	46.4
40°	28.1
42.5°	14.1
45°	7.0
47.5°	5.6
50°	5.6
52.5°	5.6
55°	5.6
57.5°	4.2
60°	4.2
62.5°	4.2
65°	2.8
67.5°	2.8
70°	2.8
72.5°	2.8
75°	2.8
77.5°	1.4
80°	1.4
82.5°	1.4
85°	0.0
87.5°	0.0



TEST NUMBER: P1260369

CATALOG NUMBER: P3AS17R359050DE010 E3CB1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)