

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260400

Luminaire Tested: P3AS17R409050DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260400
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-24)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R409050DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R40 optic, 5000K CCT AND, 90CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1975.9 lumens
Efficiency: N/A
Efficacy: 93.2 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.59
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260400

CATALOG NUMBER: P3AS17R409050DE010 E3CD1MMS

Luminous Intensity Polar Plot

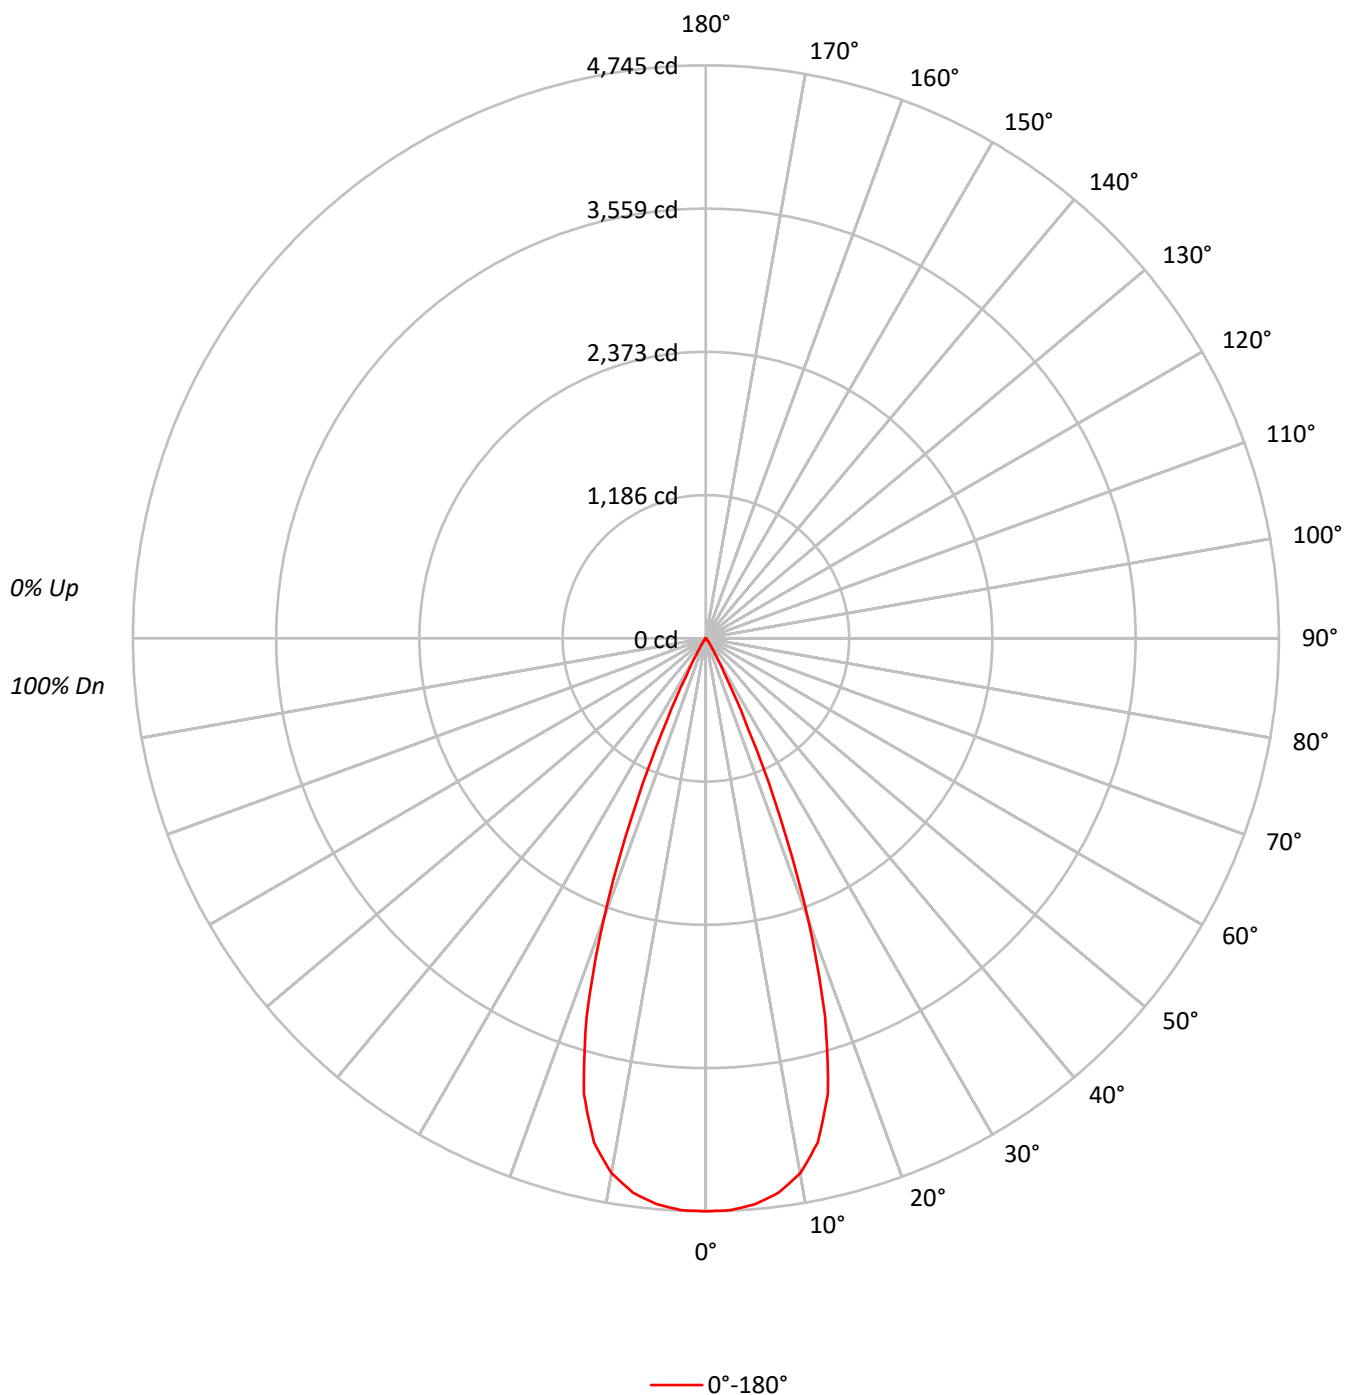

TEST NUMBER: P1260400

CATALOG NUMBER: P3AS17R409050DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		96
3	107	102	98	95	105	100	97	94	98	95	93		96	93	91		94
4	103	97	93	90	102	96	92	89	94	91	88		92	90	87		91
5	100	93	89	86	98	92	88	85	91	87	85		89	86	84		88
6	96	90	85	82	95	89	85	82	88	84	81		86	83	81		85
7	93	86	82	79	92	86	81	78	85	81	78		83	80	78		82
8	90	83	79	76	89	83	78	75	82	78	75		81	77	75		80
9	87	80	76	73	87	80	76	73	79	75	72		78	75	72		77
10	85	77	73	70	84	77	73	70	76	73	70		76	72	70		75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1040421
5°	1035414
10°	1001674
15°	886203
20°	578204
25°	204834
30°	43450
35°	14295
40°	5238
45°	1737
50°	1433
55°	1606
60°	1228
65°	1453
70°	898
75°	1186
80°	1768
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 82.5°

Luminance: 2352 cd/sqm

TEST NUMBER: P1260400

CATALOG NUMBER: P3AS17R409050DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	442.6	22.4
10°-20°	1030.7	52.2
20°-30°	447.3	22.6
30°-40°	41.2	2.1
40°-50°	5.8	0.3
50°-60°	3.6	0.2
60°-70°	2.6	0.1
70°-80°	1.5	0.1
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1920.6	97.2
0°-40°	1961.8	99.3
0°-60°	1971.3	99.8
0°-90°	1975.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1975.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4745	
5°	4704	443
15°	3904	1031
25°	847	447
35°	53	41
45°	6	6
55°	4	4
65°	3	3
75°	1	1
85°	0	1
90°	0	



TEST NUMBER: P1260400

CATALOG NUMBER: P3AS17R409050DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	4744.7
2.5°	4739.0
5°	4703.9
7.5°	4629.4
10°	4498.6
12.5°	4277.8
15°	3903.7
17.5°	3283.6
20°	2477.8
22.5°	1608.7
25°	846.6
27.5°	364.2
30°	171.6
32.5°	92.8
35°	53.4
37.5°	32.3
40°	18.3
42.5°	9.8
45°	5.6
47.5°	4.2
50°	4.2
52.5°	4.2
55°	4.2
57.5°	4.2
60°	2.8
62.5°	2.8
65°	2.8
67.5°	2.8
70°	1.4
72.5°	1.4
75°	1.4
77.5°	1.4
80°	1.4
82.5°	1.4
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)