

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260418

Luminaire Tested: P3AS17R409050DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260418
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R409050DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R40 optic, 5000K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1257.0 lumens
Efficiency: N/A
Efficacy: 59.3 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260418

CATALOG NUMBER: P3AS17R409050DE010 E3DLD1WMH

Luminous Intensity Polar Plot

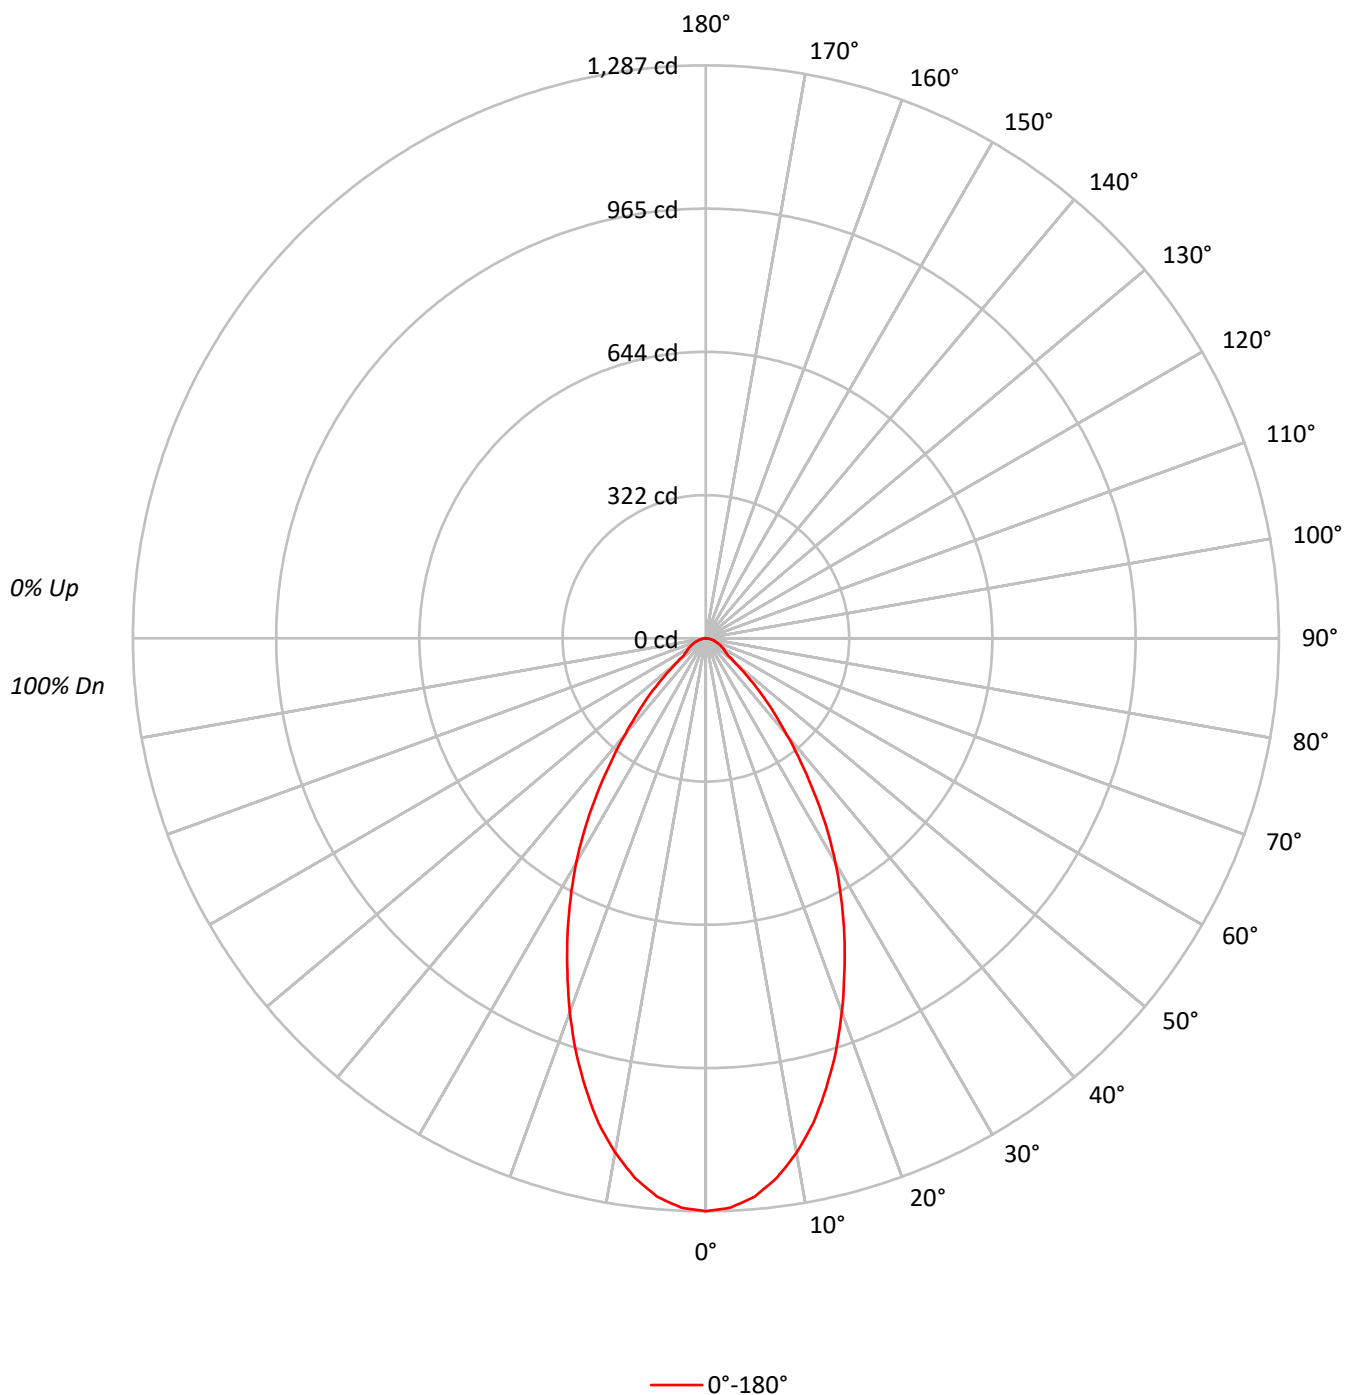

TEST NUMBER: P1260418

CATALOG NUMBER: P3AS17R409050DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	282170
5°	277063
10°	261162
15°	237209
20°	208385
25°	177954
30°	147415
35°	113689
40°	80923
45°	54517
50°	29747
55°	20950
60°	19735
65°	18264
70°	16221
75°	15504
80°	12375
85°	10567

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 54517 cd/sqm

TEST NUMBER: P1260418

CATALOG NUMBER: P3AS17R409050DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.4	9.3
10°-20°	291.1	23.2
20°-30°	336.5	26.8
30°-40°	265.2	21.1
40°-50°	136.1	10.8
50°-60°	52.0	4.1
60°-70°	34.4	2.7
70°-80°	18.7	1.5
80°-90°	5.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	744.9	59.3
0°-40°	1010.1	80.4
0°-60°	1198.3	95.3
0°-90°	1257.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1257.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1287	
5°	1259	117
15°	1045	291
25°	736	336
35°	425	265
45°	176	136
55°	55	52
65°	35	34
75°	18	19
85°	4	6
90°	0	

TEST NUMBER: P1260418

CATALOG NUMBER: P3AS17R409050DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1286.8
2.5°	1279.8
5°	1258.7
7.5°	1222.1
10°	1172.9
12.5°	1115.2
15°	1044.9
17.5°	971.8
20°	893.0
22.5°	812.9
25°	735.5
27.5°	658.2
30°	582.2
32.5°	504.9
35°	424.7
37.5°	350.2
40°	282.7
42.5°	225.0
45°	175.8
47.5°	128.0
50°	87.2
52.5°	63.3
55°	54.8
57.5°	49.2
60°	45.0
62.5°	39.4
65°	35.2
67.5°	29.5
70°	25.3
72.5°	21.1
75°	18.3
77.5°	14.1
80°	9.8
82.5°	8.4
85°	4.2
87.5°	2.8
90°	0.0

(END OF REPORT)