

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260546

Luminaire Tested: P3AS17R659050DE010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260546
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R659050DE010 E3D1WH
Description: 3in Adjustable LED luminaire with, R65 optic, 5000K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1678.0 lumens
Efficiency: N/A
Efficacy: 79.2 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260546

CATALOG NUMBER: P3AS17R659050DE010 E3D1WH

Luminous Intensity Polar Plot

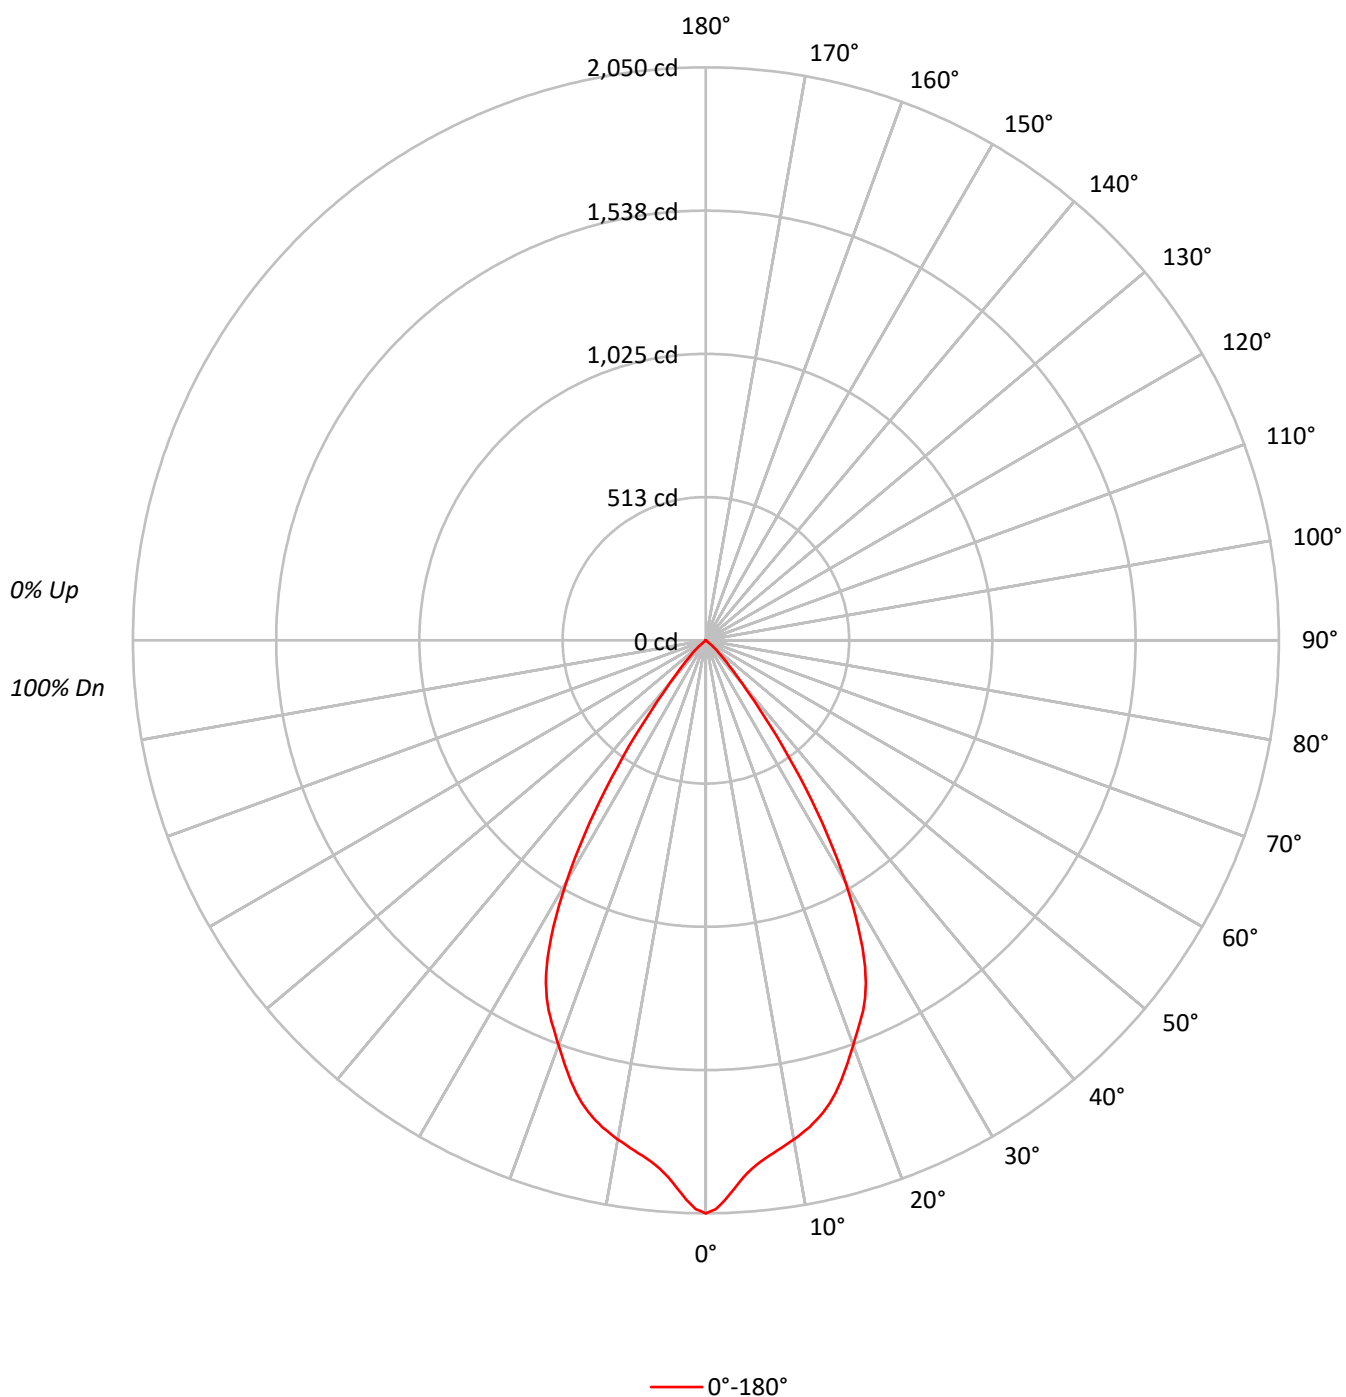

TEST NUMBER: P1260546

CATALOG NUMBER: P3AS17R659050DE010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	95	91	88	93	89	86		90	87	85		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75
7	84	75	70	65	83	75	69	65	73	69	65		72	68	65		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		67
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	449635
5°	417498
10°	403733
15°	389083
20°	359715
25°	327745
30°	253229
35°	146776
40°	58252
45°	24809
50°	5868
55°	803
60°	614
65°	363
70°	449
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24809 cd/sqm

TEST NUMBER: P1260546

CATALOG NUMBER: P3AS17R659050DE010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	178.9	10.7
10°-20°	477.6	28.5
20°-30°	604.4	36.0
30°-40°	344.2	20.5
40°-50°	68.4	4.1
50°-60°	3.5	0.2
60°-70°	0.9	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1260.9	75.1
0°-40°	1605.1	95.7
0°-60°	1677.0	99.9
0°-90°	1678.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1678.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2050	
5°	1897	179
15°	1714	478
25°	1355	604
35°	548	344
45°	80	68
55°	2	4
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1260546

CATALOG NUMBER: P3AS17R659050DE010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2050.5
1°	2035.3
2°	2002.2
3°	1963.6
4°	1925.6
5°	1896.7
6°	1875.3
7°	1858.1
8°	1842.9
9°	1827.7
10°	1813.2
11°	1797.4
12°	1780.8
13°	1760.8
14°	1739.4
15°	1713.9
16°	1683.6
17°	1650.5
18°	1614.6
19°	1576.7
20°	1541.5
21°	1505.6
22°	1473.2
23°	1439.4
24°	1400.1
25°	1354.6
26°	1300.1
27°	1234.6
28°	1160.8
29°	1082.1
30°	1000.1
31°	909.7
32°	820.1
32.5°	773.8
33°	729.0
34°	638.0
35°	548.3
36°	465.5
37°	383.5
37.5°	341.4
38°	307.6
39°	249.0
40°	203.5
42.5°	125.5
45°	80.0



TEST NUMBER: P1260546

CATALOG NUMBER: P3AS17R659050DE010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	46.9
50°	17.2
52.5°	3.4
55°	2.1
57.5°	1.4
60°	1.4
62.5°	1.4
65°	0.7
67.5°	0.7
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)