

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260570

Luminaire Tested: P3AS17R709050DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260570
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R709050DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R70 optic, 5000K CCT AND, 90CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1758.9 lumens
Efficiency: N/A
Efficacy: 83.0 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260570

CATALOG NUMBER: P3AS17R709050DE010 E3CD1MMS

Luminous Intensity Polar Plot

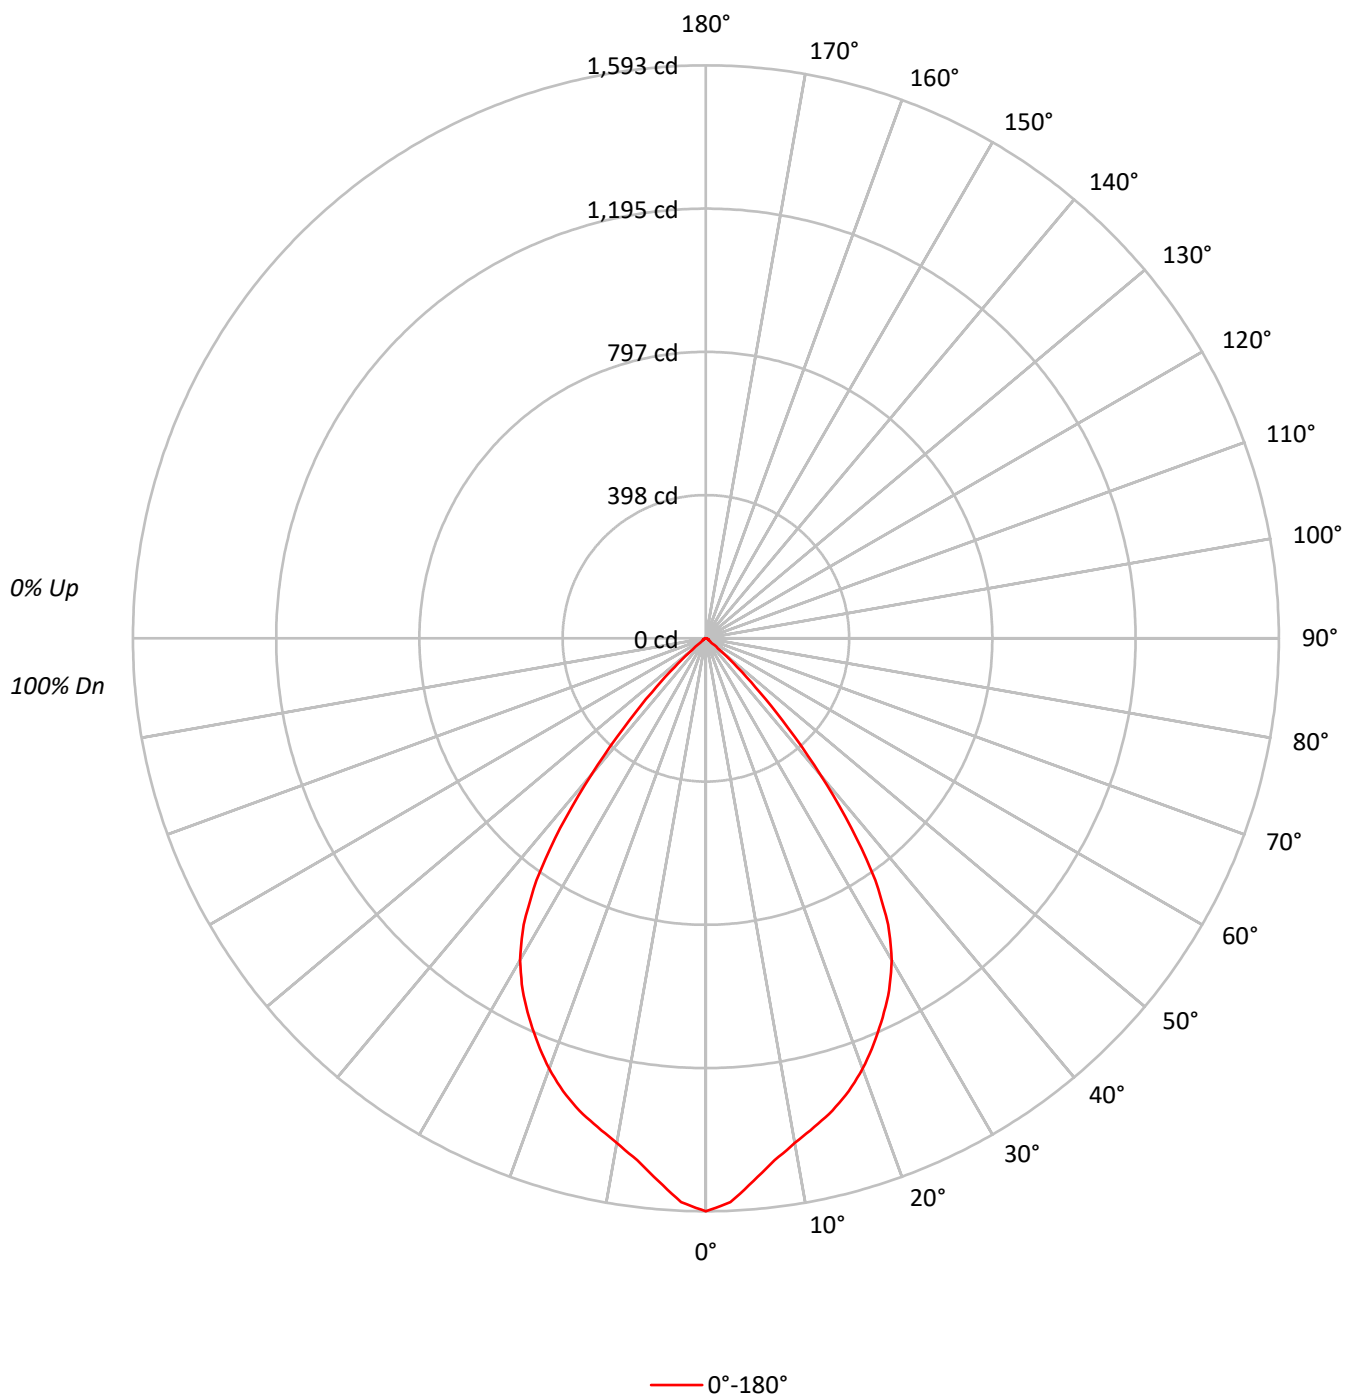

TEST NUMBER: P1260570

CATALOG NUMBER: P3AS17R709050DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	95	87	81	77	94	86	81	76	84	79	75		82	78	75		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	75	69	64	83	75	69	64	73	68	64		72	67	63		70
7	80	70	64	59	79	70	64	59	68	63	59		67	62	59		66
8	76	66	59	55	75	65	59	55	64	58	55		63	58	54		62
9	72	62	55	51	71	61	55	51	60	55	51		59	54	50		58
10	68	58	52	47	67	57	51	47	56	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	349292
5°	333303
10°	317117
15°	308628
20°	297223
25°	281315
30°	261635
35°	219775
40°	141665
45°	65836
50°	17262
55°	4282
60°	4298
65°	3632
70°	3590
75°	3558
80°	3536
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 65836 cd/sqm

TEST NUMBER: P1260570

CATALOG NUMBER: P3AS17R709050DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	141.7	8.1
10°-20°	382.0	21.7
20°-30°	533.7	30.3
30°-40°	494.9	28.1
40°-50°	177.4	10.1
50°-60°	15.0	0.9
60°-70°	7.4	0.4
70°-80°	4.8	0.3
80°-90°	1.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1057.4	60.1
0°-40°	1552.3	88.3
0°-60°	1744.7	99.2
0°-90°	1758.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1758.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1593	
5°	1514	142
15°	1360	382
25°	1163	534
35°	821	495
45°	212	177
55°	11	15
65°	7	7
75°	4	5
85°	1	2
90°	0	

TEST NUMBER: P1260570

CATALOG NUMBER: P3AS17R709050DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	1592.9
2.5°	1569.0
5°	1514.2
7.5°	1463.5
10°	1424.2
12.5°	1391.8
15°	1359.5
17.5°	1320.1
20°	1273.7
22.5°	1220.3
25°	1162.7
27.5°	1103.6
30°	1033.3
32.5°	943.4
35°	821.0
37.5°	665.0
40°	494.9
42.5°	337.4
45°	212.3
47.5°	118.1
50°	50.6
52.5°	16.9
55°	11.2
57.5°	9.8
60°	9.8
62.5°	8.4
65°	7.0
67.5°	7.0
70°	5.6
72.5°	5.6
75°	4.2
77.5°	4.2
80°	2.8
82.5°	2.8
85°	1.4
87.5°	1.4
90°	0.0

(END OF REPORT)