

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260581

Luminaire Tested: P3AS17R709050DE010 E3DL1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260581
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-45)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R709050DE010 E3DL1WH
Description: 3in Adjustable LED luminaire with, R70 optic, 5000K CCT AND, 90CRI , E3DL1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1011.0 lumens
Efficiency: N/A
Efficacy: 47.7 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260581

CATALOG NUMBER: P3AS17R709050DE010 E3DL1WH

Luminous Intensity Polar Plot

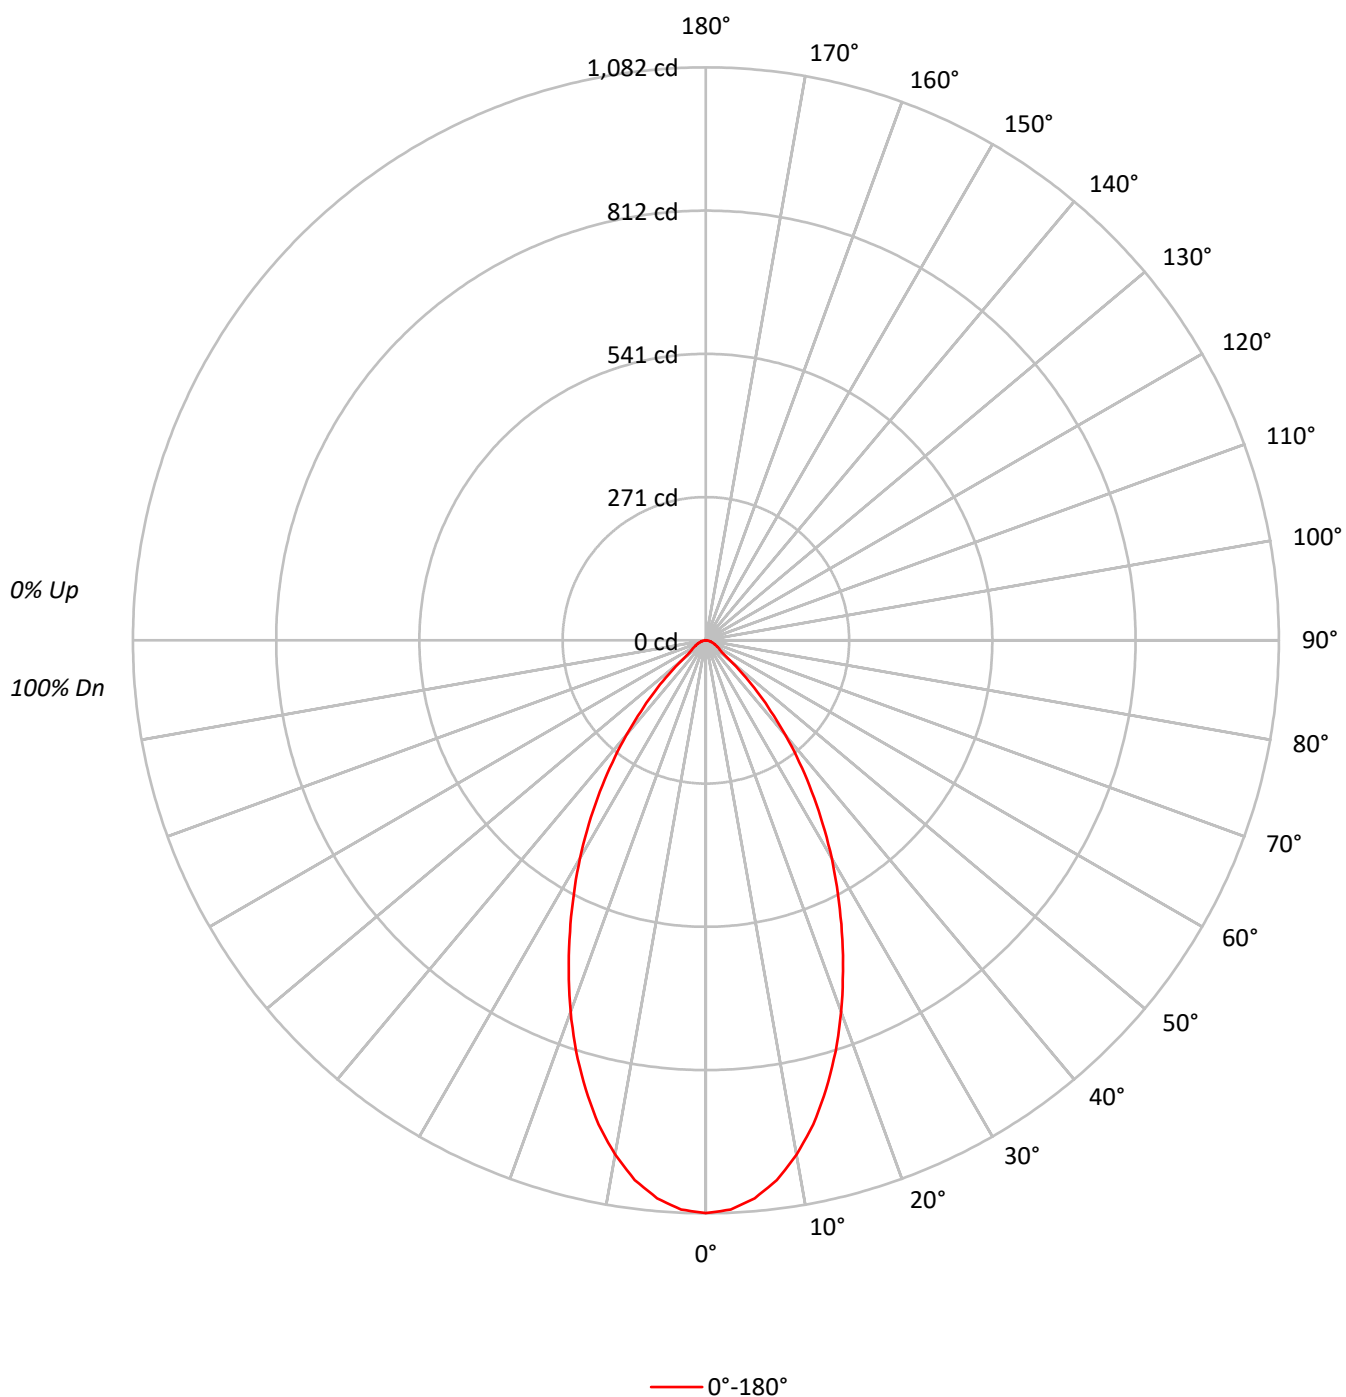

TEST NUMBER: P1260581

CATALOG NUMBER: P3AS17R709050DE010 E3DL1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	104	110	107	105	103	103	101	100		100	98	97		96
2	106	101	97	93	104	99	95	92	96	93	90		93	90	88		90
3	100	93	88	83	98	92	87	83	89	85	81		87	83	80		84
4	95	86	80	76	93	85	80	75	83	78	74		81	77	73		79
5	89	80	74	69	88	79	73	69	78	72	68		76	71	68		74
6	85	75	68	64	83	74	68	64	73	67	63		71	66	63		70
7	80	70	64	59	79	69	63	59	68	62	58		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	62	55	51	71	61	55	51	60	55	51		59	54	51		58
10	69	58	52	48	67	58	52	48	57	51	48		56	51	48		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	237152
5°	232775
10°	219502
15°	199207
20°	174245
25°	146984
30°	120348
35°	93371
40°	66811
45°	42299
50°	21117
55°	12922
60°	11096
65°	10222
70°	9040
75°	8303
80°	7072
85°	7045

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 42299 cd/sqm

TEST NUMBER: P1260581

CATALOG NUMBER: P3AS17R709050DE010 E3DL1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.7	9.8
10°-20°	244.2	24.2
20°-30°	278.1	27.5
30°-40°	217.5	21.5
40°-50°	106.8	10.6
50°-60°	32.9	3.3
60°-70°	19.5	1.9
70°-80°	10.4	1.0
80°-90°	3.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	620.9	61.4
0°-40°	838.4	82.9
0°-60°	978.1	96.7
0°-90°	1011.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1011.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1082	
5°	1058	99
15°	878	244
25°	608	278
35°	349	217
45°	136	107
55°	34	33
65°	20	19
75°	10	10
85°	3	3
90°	0	

TEST NUMBER: P1260581

CATALOG NUMBER: P3AS17R709050DE010 E3DL1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1081.5
2.5°	1075.8
5°	1057.5
7.5°	1028.0
10°	985.8
12.5°	936.6
15°	877.5
17.5°	814.3
20°	746.7
22.5°	676.4
25°	607.5
27.5°	540.0
30°	475.3
32.5°	410.6
35°	348.8
37.5°	289.7
40°	233.4
42.5°	181.4
45°	136.4
47.5°	95.6
50°	61.9
52.5°	40.8
55°	33.8
57.5°	29.5
60°	25.3
62.5°	22.5
65°	19.7
67.5°	16.9
70°	14.1
72.5°	11.3
75°	9.8
77.5°	8.4
80°	5.6
82.5°	4.2
85°	2.8
87.5°	1.4
90°	0.0

(END OF REPORT)