

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260650

Luminaire Tested: P3AS20R259050D010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260650
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R259050D010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 5000K CCT AND, 90CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2349.9 lumens
Efficiency: N/A
Efficacy: 81.6 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260650

CATALOG NUMBER: P3AS20R259050D010 E3CB1MMS

Luminous Intensity Polar Plot

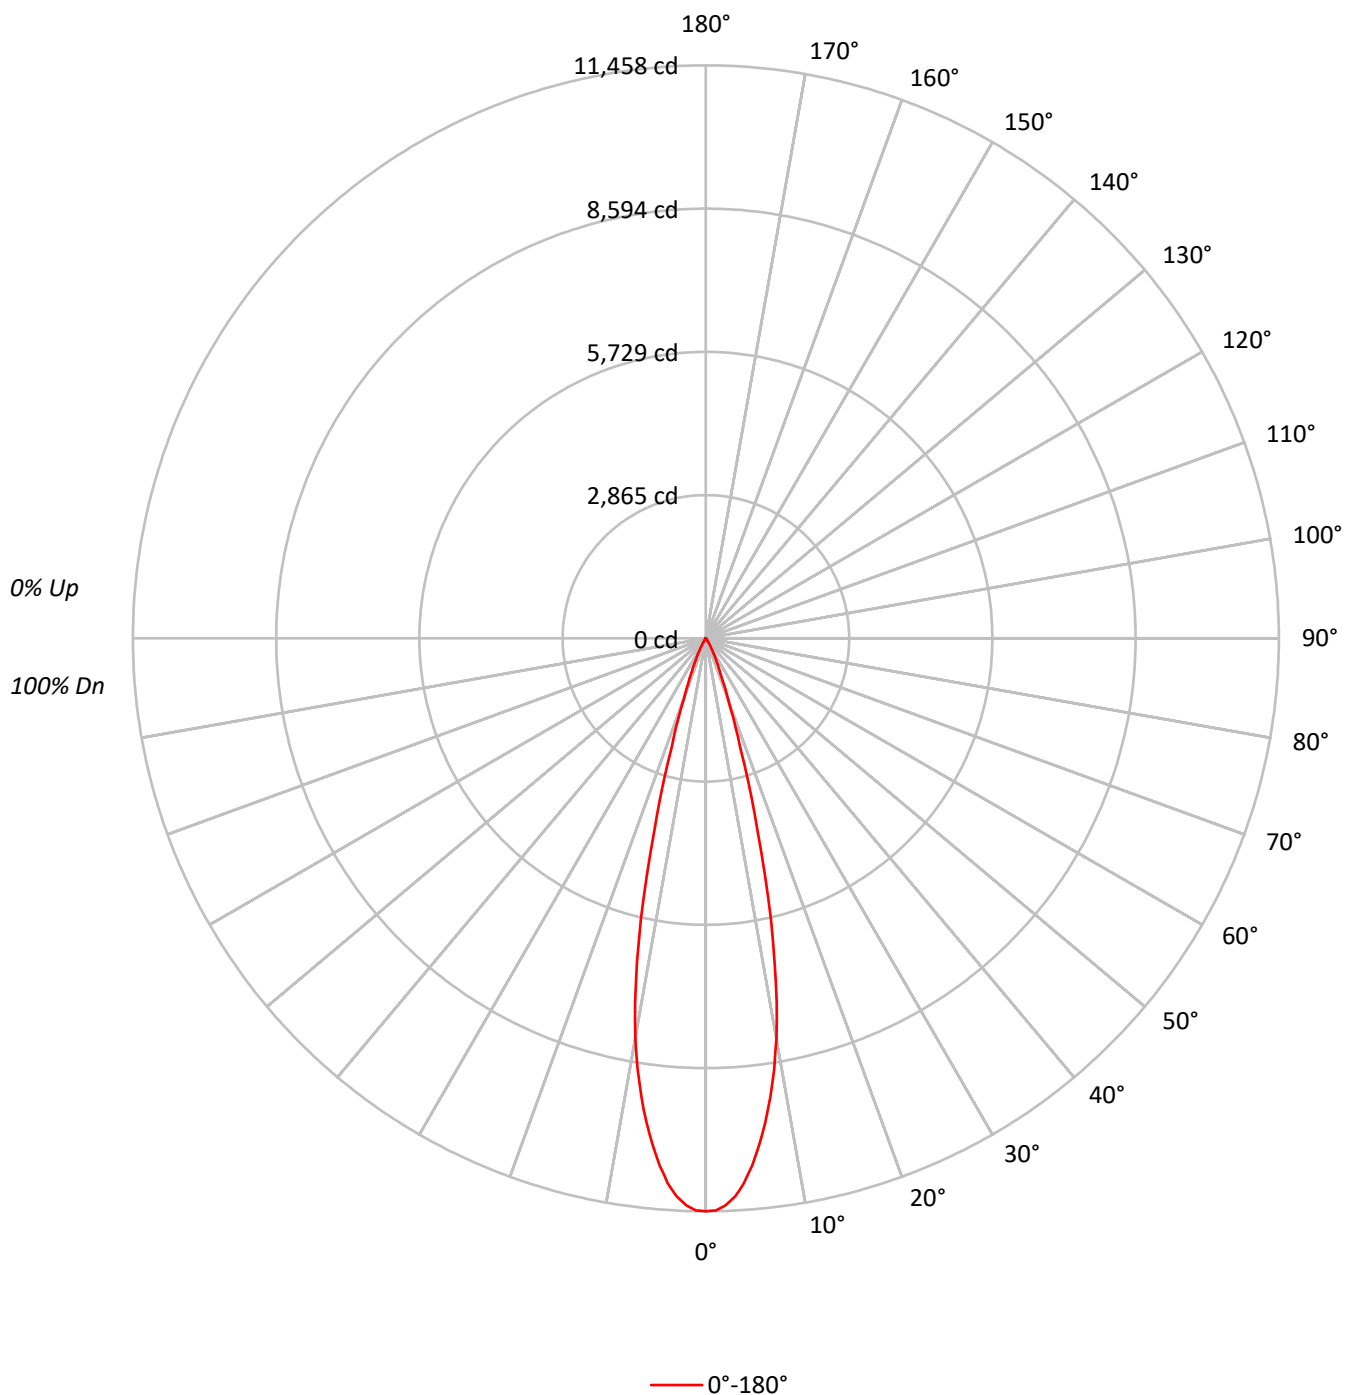

TEST NUMBER: P1260650

CATALOG NUMBER: P3AS20R259050D010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	102	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	95	92		96	93	91		94
5	103	97	93	90	101	96	93	90	95	92	89		93	91	89		92
6	100	94	90	87	99	93	90	87	92	89	87		91	88	86		90
7	97	91	88	85	96	91	87	85	90	87	84		89	86	84		88
8	95	89	85	83	94	89	85	82	88	84	82		87	84	82		86
9	93	87	83	80	92	86	83	80	86	82	80		85	82	80		84
10	91	85	81	78	90	84	81	78	84	80	78		83	80	78		82

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2512496
5°	2330260
10°	1807159
15°	906157
20°	297713
25°	118386
30°	44412
35°	12849
40°	5811
45°	2295
50°	1876
55°	1415
60°	1623
65°	1920
70°	1154
75°	1525
80°	2273
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2295 cd/sqm

TEST NUMBER: P1260650

CATALOG NUMBER: P3AS20R259050D010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	931.2	39.6
10°-20°	1110.9	47.3
20°-30°	250.4	10.7
30°-40°	40.6	1.7
40°-50°	7.3	0.3
50°-60°	3.9	0.2
60°-70°	3.4	0.1
70°-80°	1.9	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2292.5	97.6
0°-40°	2333.1	99.3
0°-60°	2344.3	99.8
0°-90°	2349.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2349.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11458	
5°	10586	931
15°	3992	1111
25°	489	250
35°	48	41
45°	7	7
55°	4	4
65°	4	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1260650

CATALOG NUMBER: P3AS20R259050D010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	11457.9
1°	11439.4
2°	11347.1
3°	11177.2
4°	10920.6
5°	10586.4
6°	10187.6
7°	9755.6
8°	9260.8
9°	8719.9
10°	8116.1
11°	7420.1
12°	6618.8
13°	5780.6
14°	4881.5
15°	3991.6
17.5°	2274.6
20°	1275.8
22.5°	769.9
25°	489.3
27.5°	300.9
30°	175.4
32.5°	92.3
35°	48.0
37.5°	31.4
40°	20.3
42.5°	12.9
45°	7.4
47.5°	5.5
50°	5.5
52.5°	5.5
55°	3.7
57.5°	3.7
60°	3.7
62.5°	3.7
65°	3.7
67.5°	3.7
70°	1.8
72.5°	1.8
75°	1.8
77.5°	1.8
80°	1.8
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1260650

CATALOG NUMBER: P3AS20R259050D010 E3CB1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)