

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260723

Luminaire Tested: P3AS20R359050D010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260723
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R359050D010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 5000K CCT AND, 90CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1940.0 lumens
Efficiency: N/A
Efficacy: 67.4 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260723

CATALOG NUMBER: P3AS20R359050D010 E3DL1MW

Luminous Intensity Polar Plot

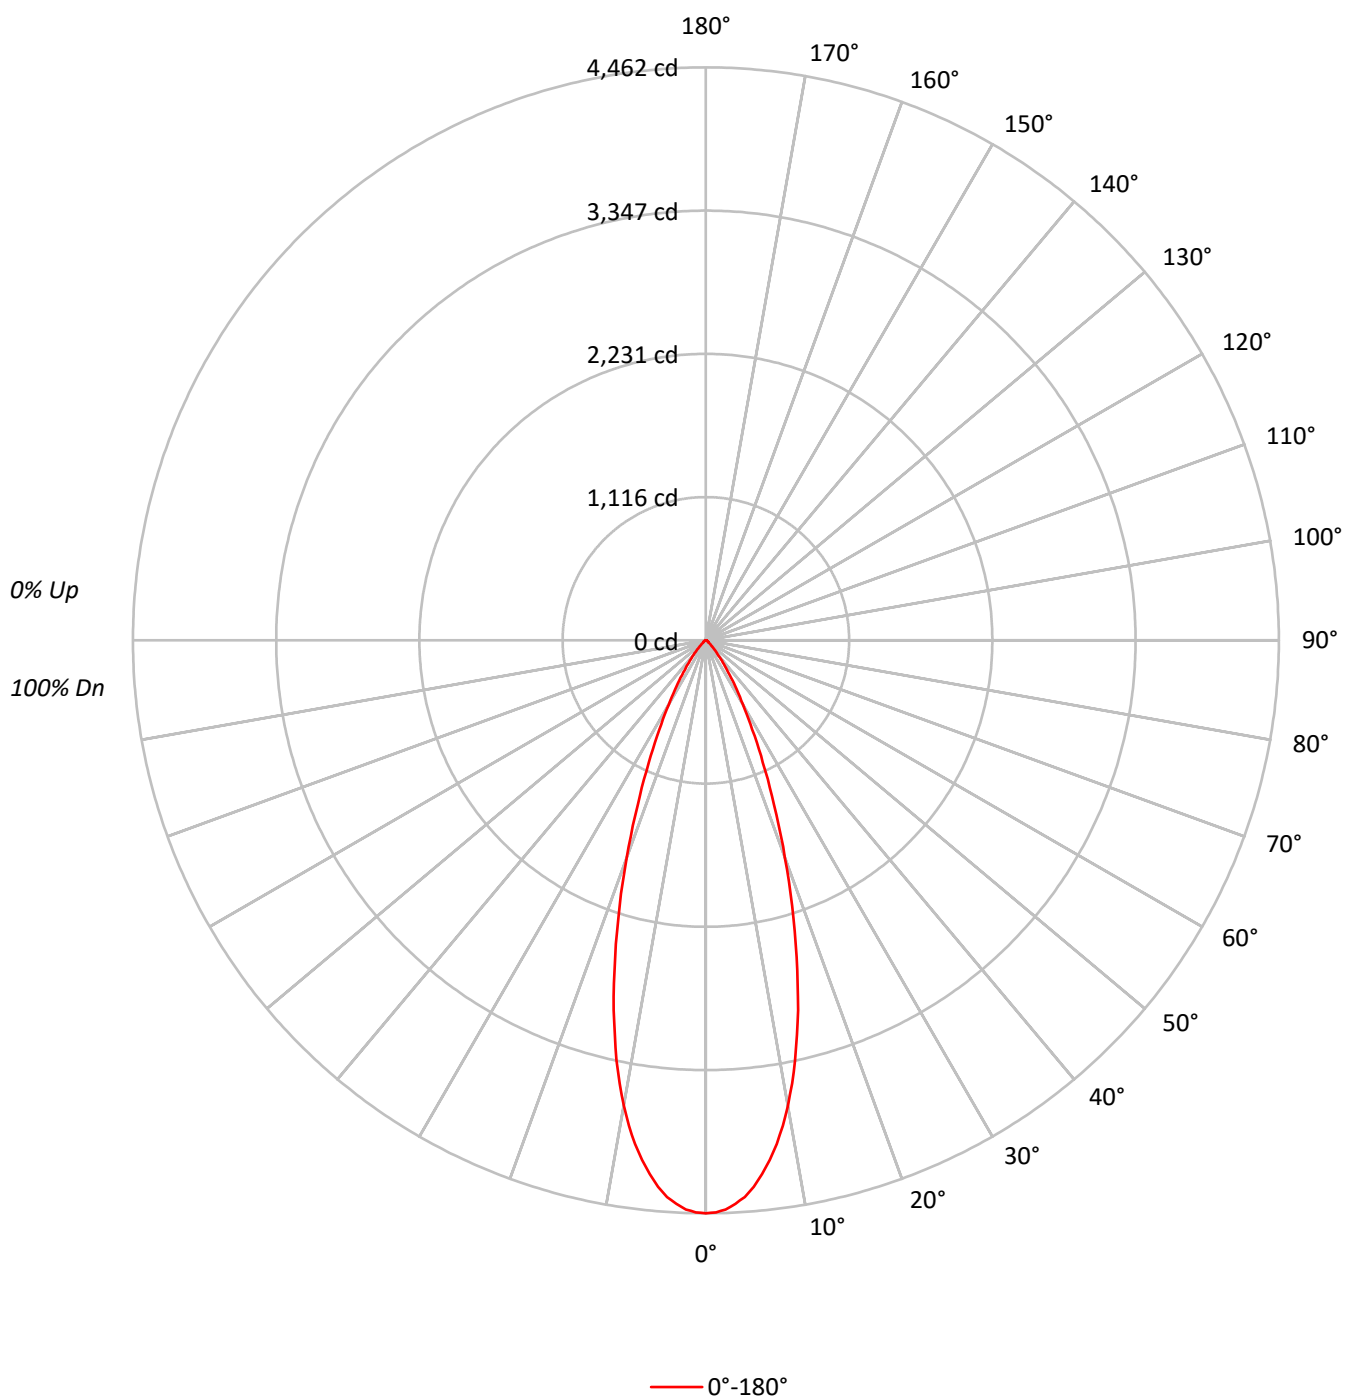

TEST NUMBER: P1260723

CATALOG NUMBER: P3AS20R359050D010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	85	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	78		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	69	84	77	72	68	76	71	68		75	71	68		74
9	82	74	69	66	81	74	69	65	73	68	65		72	68	65		71
10	79	71	66	63	78	71	66	63	70	66	63		69	65	62		69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	978452
5°	940345
10°	819335
15°	627563
20°	419850
25°	254047
30°	145795
35°	81512
40°	43310
45°	22328
50°	10712
55°	8449
60°	8113
65°	6693
70°	7117
75°	6270
80°	6945
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 22328 cd/sqm

TEST NUMBER: P1260723

CATALOG NUMBER: P3AS20R359050D010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	388.7	20.0
10°-20°	753.2	38.8
20°-30°	493.1	25.4
30°-40°	200.0	10.3
40°-50°	60.0	3.1
50°-60°	20.4	1.1
60°-70°	13.7	0.7
70°-80°	8.0	0.4
80°-90°	2.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1635.1	84.3
0°-40°	1835.1	94.6
0°-60°	1915.5	98.7
0°-90°	1940.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1940.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4462	
5°	4272	389
15°	2764	753
25°	1050	493
35°	304	200
45°	72	60
55°	22	20
65°	13	14
75°	7	8
85°	2	3
90°	0	

TEST NUMBER: P1260723

CATALOG NUMBER: P3AS20R359050D010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	4462.1
1°	4454.7
2°	4434.4
3°	4393.8
4°	4345.8
5°	4272.0
6°	4179.8
7°	4076.4
8°	3960.2
9°	3827.3
10°	3679.7
11°	3515.4
12°	3343.8
13°	3151.9
14°	2969.2
15°	2764.4
17.5°	2268.0
20°	1799.2
22.5°	1384.0
25°	1050.0
27.5°	782.4
30°	575.8
32.5°	422.6
35°	304.5
37.5°	215.9
40°	151.3
42.5°	105.2
45°	72.0
47.5°	48.0
50°	31.4
52.5°	24.0
55°	22.1
57.5°	20.3
60°	18.5
62.5°	16.6
65°	12.9
67.5°	11.1
70°	11.1
72.5°	9.2
75°	7.4
77.5°	5.5
80°	5.5
82.5°	3.7
85°	1.8
87.5°	1.8



TEST NUMBER: P1260723

CATALOG NUMBER: P3AS20R359050D010 E3DL1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)