

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260762

Luminaire Tested: P3AS20R409050D010 E3DLD1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260762
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R409050D010 E3DLD1WH
Description: 3in Adjustable LED luminaire with, R40 optic, 5000K CCT AND, 90CRI , E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1649.0 lumens
Efficiency: N/A
Efficacy: 57.3 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260762

CATALOG NUMBER: P3AS20R409050D010 E3DLD1WH

Luminous Intensity Polar Plot

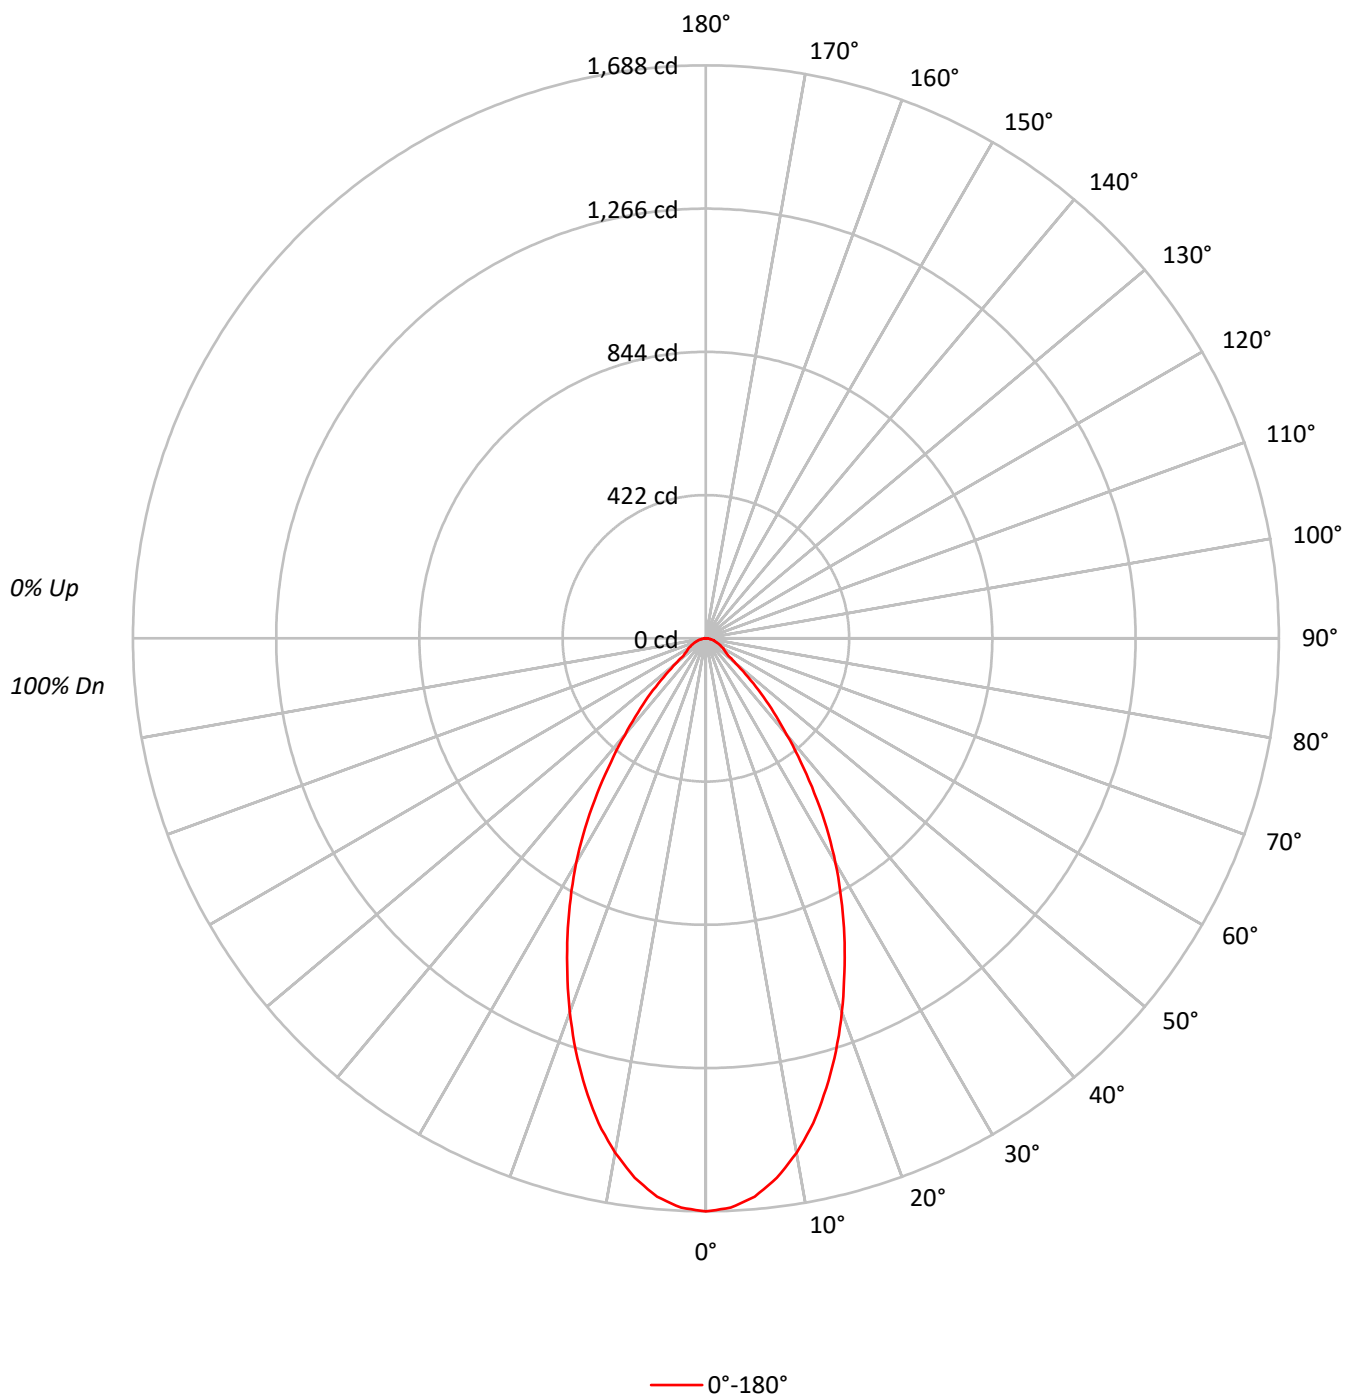

TEST NUMBER: P1260762

CATALOG NUMBER: P3AS20R409050D010 E3DLD1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	370168
5°	363459
10°	342612
15°	311194
20°	273374
25°	233457
30°	193397
35°	149158
40°	106142
45°	71511
50°	39026
55°	27526
60°	25875
65°	23920
70°	21286
75°	20334
80°	16290
85°	13838

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 71511 cd/sqm

TEST NUMBER: P1260762

CATALOG NUMBER: P3AS20R409050D010 E3DLD1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.0	9.3
10°-20°	381.8	23.2
20°-30°	441.4	26.8
30°-40°	347.9	21.1
40°-50°	178.6	10.8
50°-60°	68.3	4.1
60°-70°	45.1	2.7
70°-80°	24.6	1.5
80°-90°	7.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	977.3	59.3
0°-40°	1325.2	80.4
0°-60°	1572.0	95.3
0°-90°	1649.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1649.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1688	
5°	1651	154
15°	1371	382
25°	965	441
35°	557	348
45°	231	179
55°	72	68
65°	46	45
75°	24	25
85°	6	7
90°	0	

TEST NUMBER: P1260762

CATALOG NUMBER: P3AS20R409050D010 E3DLD1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1688.1
2.5°	1678.9
5°	1651.2
7.5°	1603.2
10°	1538.7
12.5°	1463.0
15°	1370.8
17.5°	1274.8
20°	1171.5
22.5°	1066.4
25°	964.9
27.5°	863.4
30°	763.8
32.5°	662.3
35°	557.2
37.5°	459.4
40°	370.8
42.5°	295.2
45°	230.6
47.5°	167.9
50°	114.4
52.5°	83.0
55°	72.0
57.5°	64.6
60°	59.0
62.5°	51.7
65°	46.1
67.5°	38.7
70°	33.2
72.5°	27.7
75°	24.0
77.5°	18.4
80°	12.9
82.5°	11.1
85°	5.5
87.5°	3.7
90°	0.0

(END OF REPORT)