

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260841

Luminaire Tested: P3AS20R559050D010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1260841
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R559050D010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R55 optic, 5000K CCT AND, 90CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 766.0 lumens
Efficiency: N/A
Efficacy: 26.6 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1260841

CATALOG NUMBER: P3AS20R559050D010 E3DLD1GPH

Luminous Intensity Polar Plot

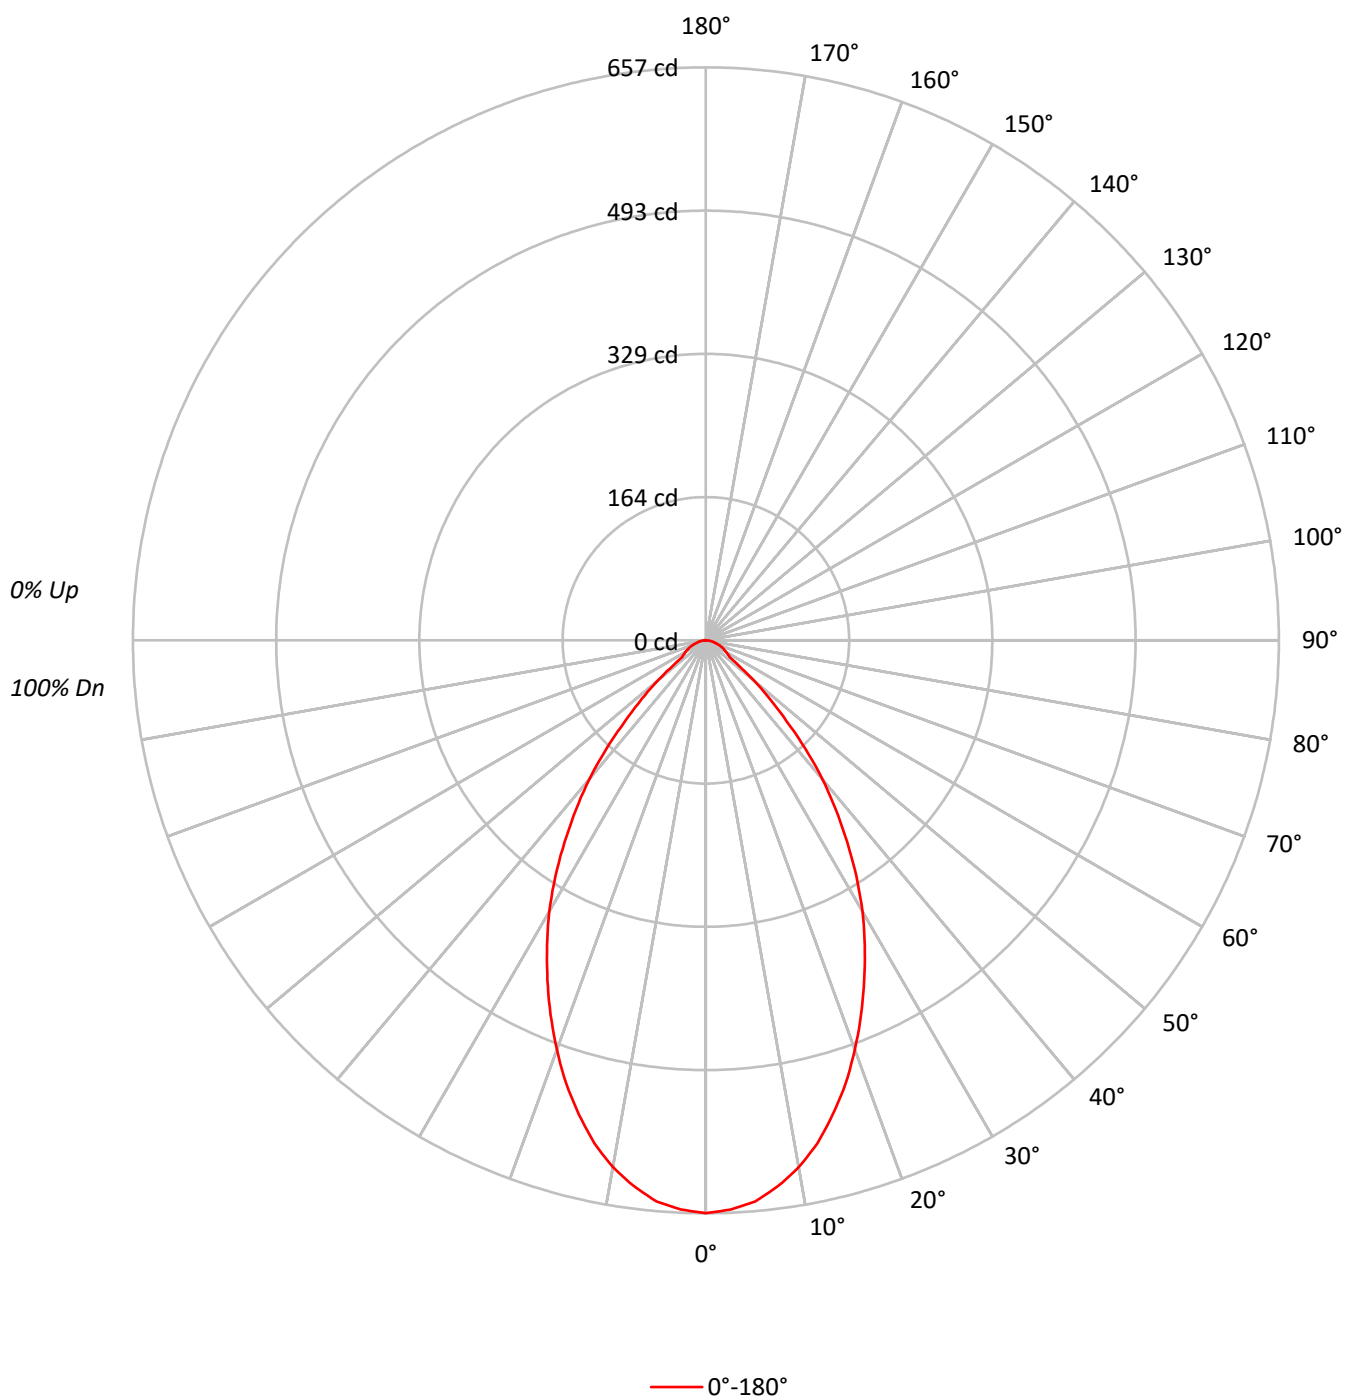

TEST NUMBER: P1260841

CATALOG NUMBER: P3AS20R559050D010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	102	103	100	98		99	97	96		95
2	105	100	95	91	103	98	93	90	94	91	88		91	88	86		89
3	99	91	85	81	97	90	84	80	87	82	79		85	81	77		82
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76
5	87	77	71	66	85	76	70	65	75	69	65		73	68	64		71
6	82	72	65	60	80	71	64	60	69	64	59		68	63	59		66
7	77	67	60	55	76	66	59	55	65	59	54		63	58	54		62
8	73	62	55	51	72	62	55	51	60	55	50		59	54	50		58
9	69	58	51	47	68	58	51	47	57	51	47		56	50	46		55
10	65	55	48	44	64	54	48	44	53	47	43		52	47	43		52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	144024
5°	142196
10°	136582
15°	127742
20°	116537
25°	103966
30°	90951
35°	75570
40°	59569
45°	40407
50°	24699
55°	12807
60°	11885
65°	11259
70°	10450
75°	9235
80°	9092
85°	6793

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 40407 cd/sqm

TEST NUMBER: P1260841

CATALOG NUMBER: P3AS20R559050D010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.6	7.9
10°-20°	157.3	20.5
20°-30°	197.0	25.7
30°-40°	175.8	23.0
40°-50°	103.0	13.4
50°-60°	35.6	4.6
60°-70°	21.5	2.8
70°-80°	11.9	1.6
80°-90°	3.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	414.8	54.2
0°-40°	590.7	77.1
0°-60°	729.2	95.2
0°-90°	766.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	766.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	657	
5°	646	61
15°	563	157
25°	430	197
35°	282	176
45°	130	103
55°	34	36
65°	22	21
75°	11	12
85°	3	3
90°	0	

TEST NUMBER: P1260841

CATALOG NUMBER: P3AS20R559050D010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	656.8
2.5°	653.2
5°	646.0
7.5°	631.5
10°	613.4
12.5°	590.8
15°	562.7
17.5°	532.9
20°	499.4
22.5°	465.0
25°	429.7
27.5°	394.5
30°	359.2
32.5°	321.2
35°	282.3
37.5°	244.3
40°	208.1
42.5°	169.2
45°	130.3
47.5°	99.5
50°	72.4
52.5°	47.0
55°	33.5
57.5°	29.9
60°	27.1
62.5°	24.4
65°	21.7
67.5°	19.0
70°	16.3
72.5°	13.6
75°	10.9
77.5°	9.0
80°	7.2
82.5°	4.5
85°	2.7
87.5°	1.8
90°	0.0

(END OF REPORT)