

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260929

Luminaire Tested: P3AS20R709050D010 E3DLP1H

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1260929  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-45)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS20R709050D010 E3DLP1H  
Description: 3in Adjustable LED luminaire with, R70 optic, 5000K CCT AND, 90CRI , E3DLP1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1327.0 lumens  
Efficiency: N/A  
Efficacy: 46.1 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1260929  
CATALOG NUMBER: P3AS20R709050D010 E3DLP1H

### Luminous Intensity Polar Plot

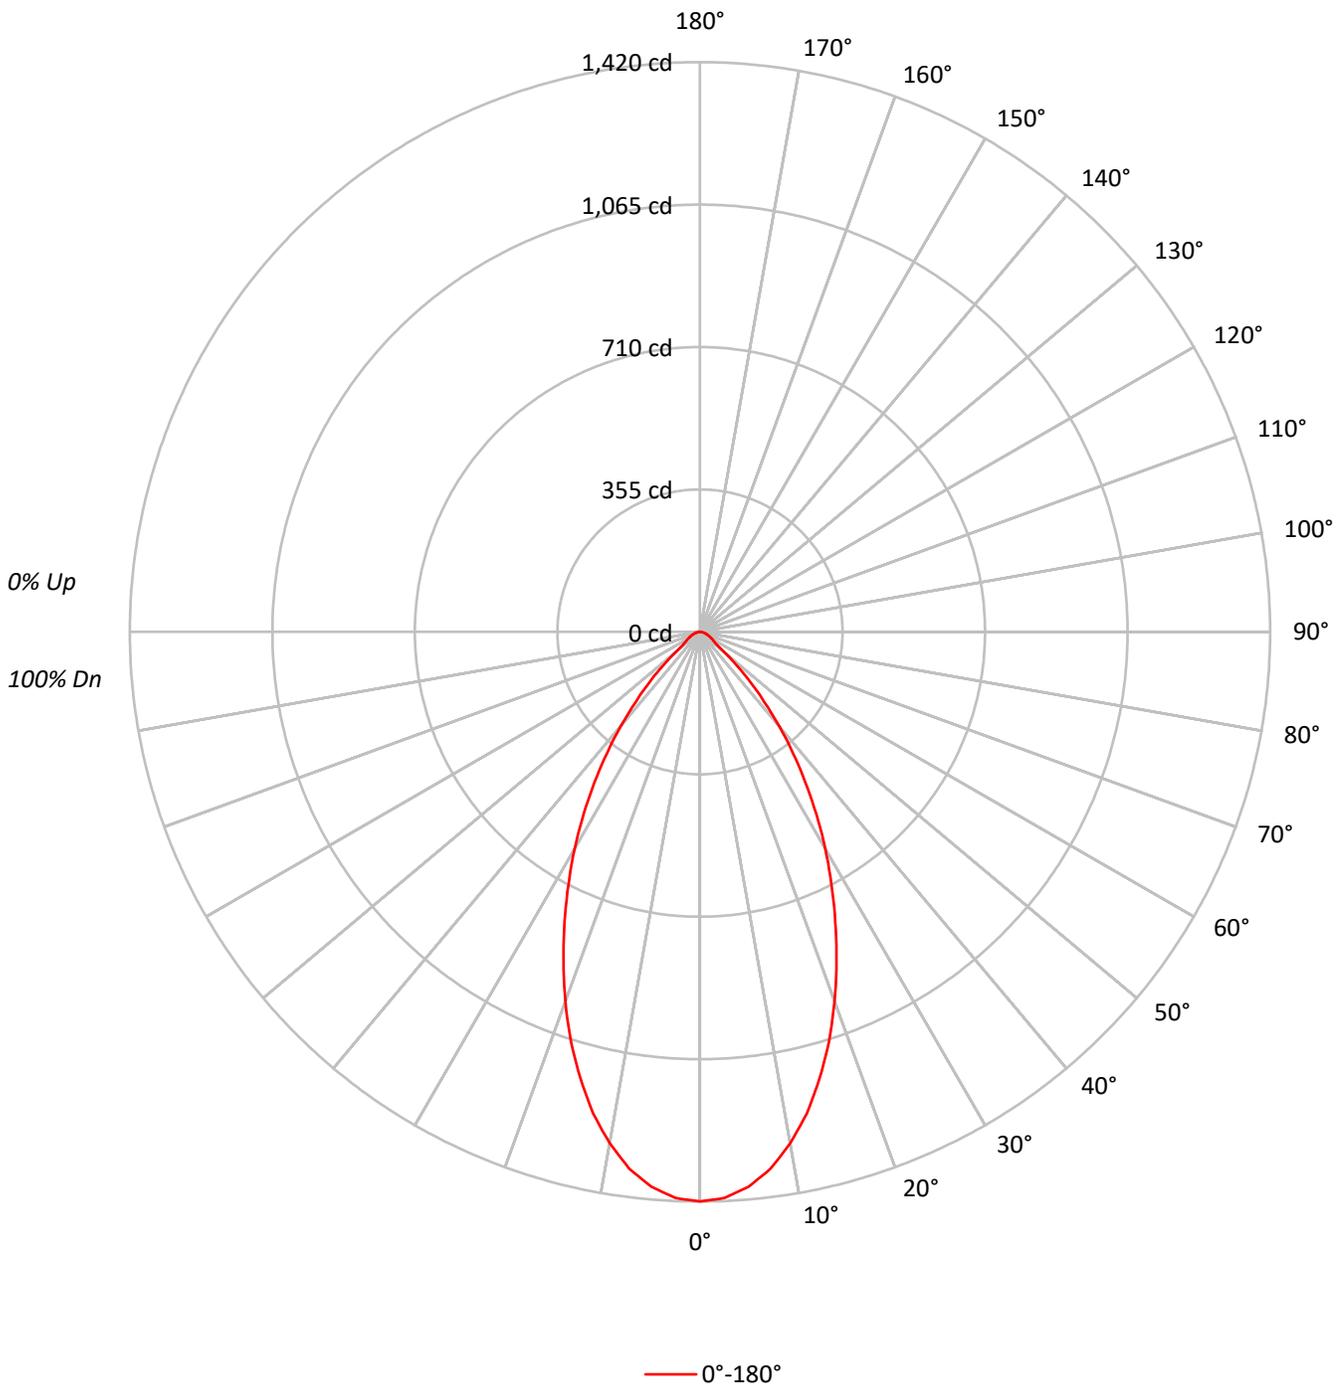



TEST NUMBER: P1260929  
 CATALOG NUMBER: P3AS20R709050D010 E3DLP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92			
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84			
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77			
4	95	86	80	76	93	85	80	75	83	78	74	81	77	73	79	76	73	71			
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	65	62	61			
7	80	70	64	59	79	69	63	59	68	62	58	67	62	58	66	61	58	56			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49			
10	69	58	52	48	67	58	52	48	57	51	48	56	51	48	55	51	47	46			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	311269
5°	305546
10°	288126
15°	261477
20°	228733
25°	192930
30°	157974
35°	122550
40°	87707
45°	55510
50°	27701
55°	16936
60°	14560
65°	13387
70°	11861
75°	10929
80°	9345
85°	9309

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 55510 cd/sqm



TEST NUMBER: P1260929  
 CATALOG NUMBER: P3AS20R709050D010 E3DLP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	129.5	9.8
10°-20°	320.5	24.2
20°-30°	365.0	27.5
30°-40°	285.4	21.5
40°-50°	140.2	10.6
50°-60°	43.1	3.2
60°-70°	25.6	1.9
70°-80°	13.6	1.0
80°-90°	4.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	815.0	61.4
0°-40°	1100.5	82.9
0°-60°	1283.8	96.7
0°-90°	1327.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1327.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1420	
5°	1388	130
15°	1152	320
25°	797	365
35°	458	285
45°	179	140
55°	44	43
65°	26	26
75°	13	14
85°	4	4
90°	0	



TEST NUMBER: P1260929  
CATALOG NUMBER: P3AS20R709050D010 E3DLP1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1419.5
2.5°	1412.1
5°	1388.1
7.5°	1349.3
10°	1294.0
12.5°	1229.3
15°	1151.8
17.5°	1068.8
20°	980.2
22.5°	887.9
25°	797.4
27.5°	708.8
30°	623.9
32.5°	539.0
35°	457.8
37.5°	380.2
40°	306.4
42.5°	238.1
45°	179.0
47.5°	125.5
50°	81.2
52.5°	53.5
55°	44.3
57.5°	38.8
60°	33.2
62.5°	29.5
65°	25.8
67.5°	22.2
70°	18.5
72.5°	14.8
75°	12.9
77.5°	11.1
80°	7.4
82.5°	5.5
85°	3.7
87.5°	1.8
90°	0.0

(END OF REPORT)