

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1260990

Luminaire Tested: P3AS24R209050D010 E3DLP1WH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1260990  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS24R209050D010 E3DLP1WH  
Description: 3in Adjustable LED luminaire with, R20 optic, 5000K CCT AND, 90CRI , E3DLP1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2136.0 lumens  
Efficiency: N/A  
Efficacy: 74.2 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1260990

CATALOG NUMBER: P3AS24R209050D010 E3DLP1WH

### Luminous Intensity Polar Plot

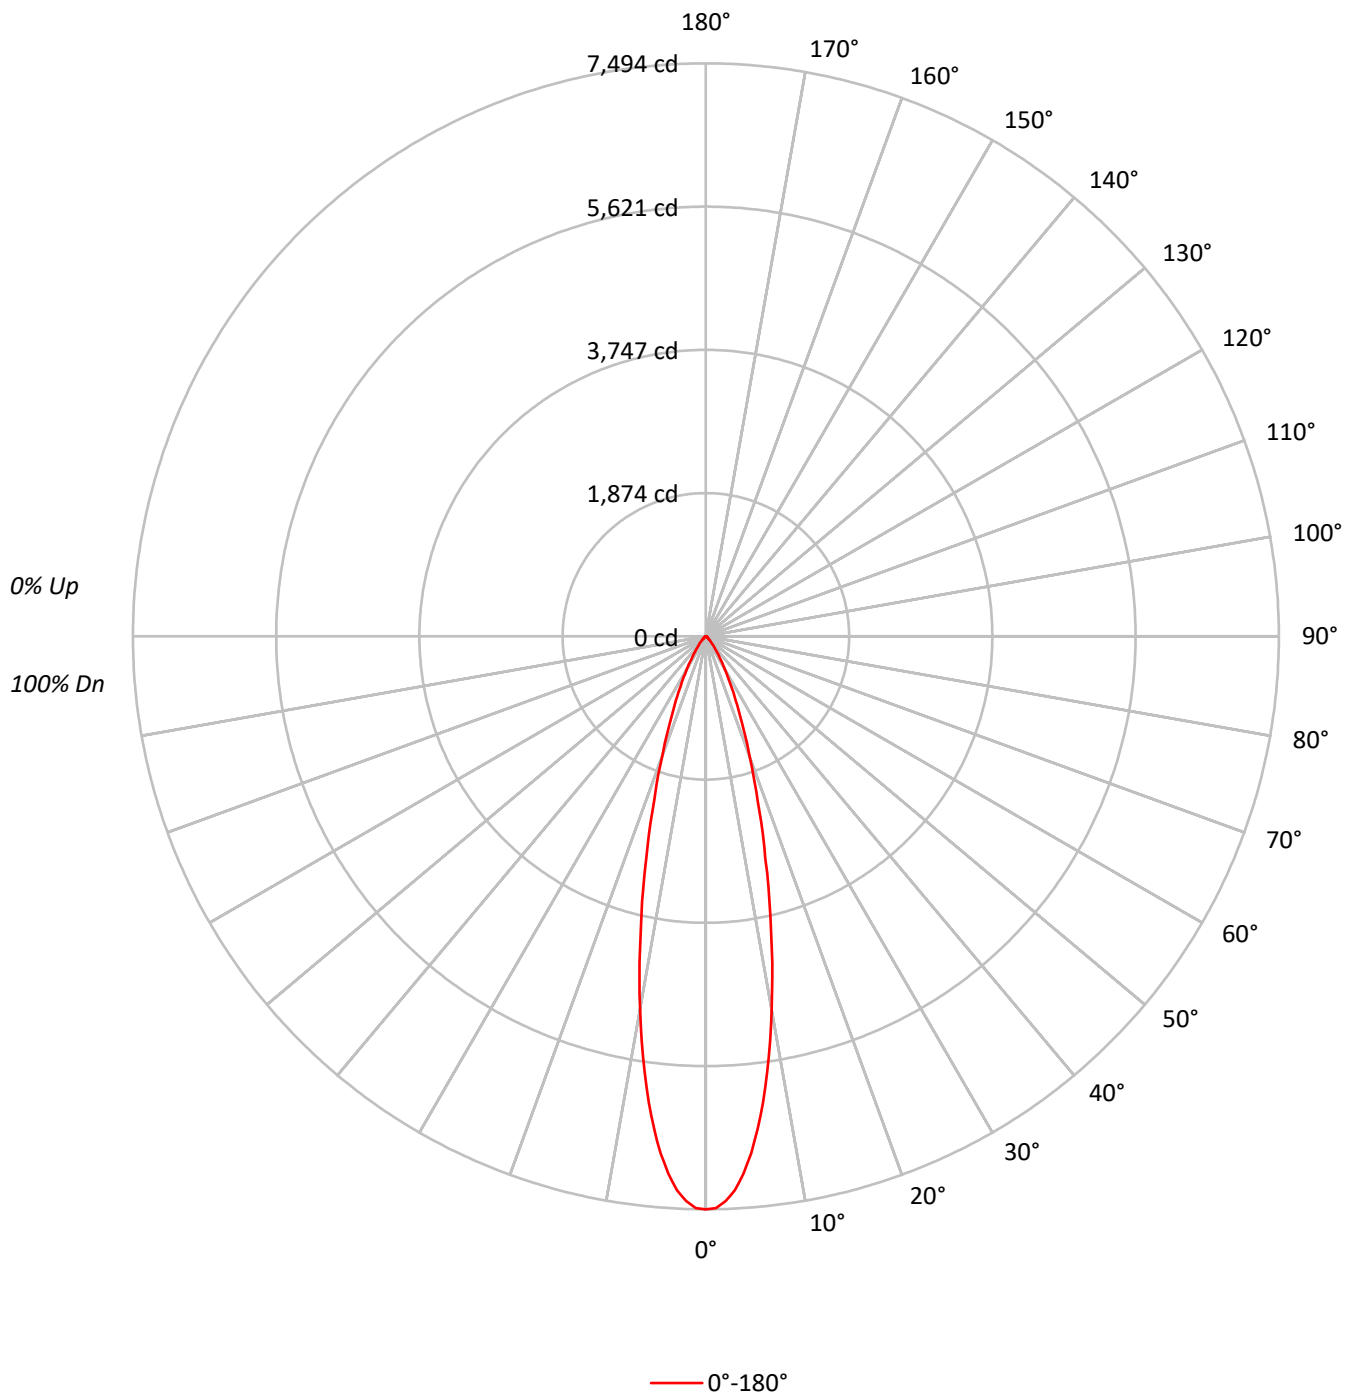

TEST NUMBER: P1260990

CATALOG NUMBER: P3AS24R209050D010 E3DLP1WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 |  | 102 | 101 | 100 |  | 99  |
| 2   | 110 | 106 | 102 | 100 | 108 | 104 | 101 | 98  | 101 | 98  | 96  |  | 98  | 96  | 94  |  | 95  |
| 3   | 106 | 100 | 96  | 93  | 104 | 99  | 95  | 92  | 97  | 93  | 91  |  | 94  | 92  | 89  |  | 92  |
| 4   | 102 | 96  | 91  | 88  | 100 | 95  | 90  | 87  | 92  | 89  | 86  |  | 91  | 88  | 85  |  | 89  |
| 5   | 98  | 91  | 87  | 83  | 97  | 90  | 86  | 83  | 89  | 85  | 82  |  | 87  | 84  | 81  |  | 86  |
| 6   | 95  | 87  | 83  | 79  | 93  | 87  | 82  | 79  | 85  | 81  | 78  |  | 84  | 81  | 78  |  | 83  |
| 7   | 91  | 84  | 79  | 76  | 90  | 83  | 79  | 76  | 82  | 78  | 75  |  | 81  | 78  | 75  |  | 80  |
| 8   | 88  | 81  | 76  | 73  | 87  | 80  | 76  | 73  | 79  | 75  | 72  |  | 78  | 75  | 72  |  | 78  |
| 9   | 85  | 78  | 73  | 70  | 85  | 77  | 73  | 70  | 77  | 73  | 70  |  | 76  | 72  | 69  |  | 75  |
| 10  | 83  | 75  | 71  | 68  | 82  | 75  | 70  | 67  | 74  | 70  | 67  |  | 73  | 70  | 67  |  | 73  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1643399 |
| 5°  | 1493899 |
| 10° | 1104077 |
| 15° | 682978  |
| 20° | 390027  |
| 25° | 222666  |
| 30° | 124880  |
| 35° | 67940   |
| 40° | 37213   |
| 45° | 20467   |
| 50° | 11974   |
| 55° | 8678    |
| 60° | 8157    |
| 65° | 7472    |
| 70° | 6604    |
| 75° | 7032    |
| 80° | 5177    |
| 85° | 5284    |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 20467 cd/sqm

TEST NUMBER: P1260990

CATALOG NUMBER: P3AS24R209050D010 E3DLP1WH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 587.7  | 27.5      |
| 10°-20°   | 839.0  | 39.3      |
| 20°-30°   | 437.9  | 20.5      |
| 30°-40°   | 169.3  | 7.9       |
| 40°-50°   | 55.0   | 2.6       |
| 50°-60°   | 21.6   | 1.0       |
| 60°-70°   | 14.3   | 0.7       |
| 70°-80°   | 8.4    | 0.4       |
| 80°-90°   | 2.8    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1864.6 | 87.3      |
| 0°-40°    | 2033.9 | 95.2      |
| 0°-60°    | 2110.5 | 98.8      |
| 0°-90°    | 2136.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2136.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 7494 |      |
| 5°  | 6787 | 588  |
| 15° | 3008 | 839  |
| 25° | 920  | 438  |
| 35° | 254  | 169  |
| 45° | 66   | 55   |
| 55° | 23   | 22   |
| 65° | 14   | 14   |
| 75° | 8    | 8    |
| 85° | 2    | 3    |
| 90° | 0    |      |

TEST NUMBER: P1260990

CATALOG NUMBER: P3AS24R209050D010 E3DLP1WH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 7494.5 |
| 1°    | 7480.1 |
| 2°    | 7391.4 |
| 3°    | 7255.2 |
| 4°    | 7044.7 |
| 5°    | 6786.8 |
| 6°    | 6481.4 |
| 7°    | 6143.0 |
| 8°    | 5750.9 |
| 9°    | 5369.2 |
| 10°   | 4958.5 |
| 12.5° | 3941.2 |
| 15°   | 3008.5 |
| 17.5° | 2251.3 |
| 20°   | 1671.4 |
| 22.5° | 1238.1 |
| 25°   | 920.3  |
| 27.5° | 678.9  |
| 30°   | 493.2  |
| 32.5° | 357.0  |
| 35°   | 253.8  |
| 37.5° | 183.6  |
| 40°   | 130.0  |
| 42.5° | 92.9   |
| 45°   | 66.0   |
| 47.5° | 47.5   |
| 50°   | 35.1   |
| 52.5° | 26.8   |
| 55°   | 22.7   |
| 57.5° | 20.6   |
| 60°   | 18.6   |
| 62.5° | 16.5   |
| 65°   | 14.4   |
| 67.5° | 12.4   |
| 70°   | 10.3   |
| 72.5° | 10.3   |
| 75°   | 8.3    |
| 77.5° | 6.2    |
| 80°   | 4.1    |
| 82.5° | 4.1    |
| 85°   | 2.1    |
| 87.5° | 2.1    |
| 90°   | 0.0    |

(END OF REPORT)