

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261011

Luminaire Tested: P3AS24R259050D010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261011
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R259050D010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R25 optic, 5000K CCT AND, 90CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 812.0 lumens
Efficiency: N/A
Efficacy: 28.2 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261011

CATALOG NUMBER: P3AS24R259050D010 E3DLD1GPH

Luminous Intensity Polar Plot

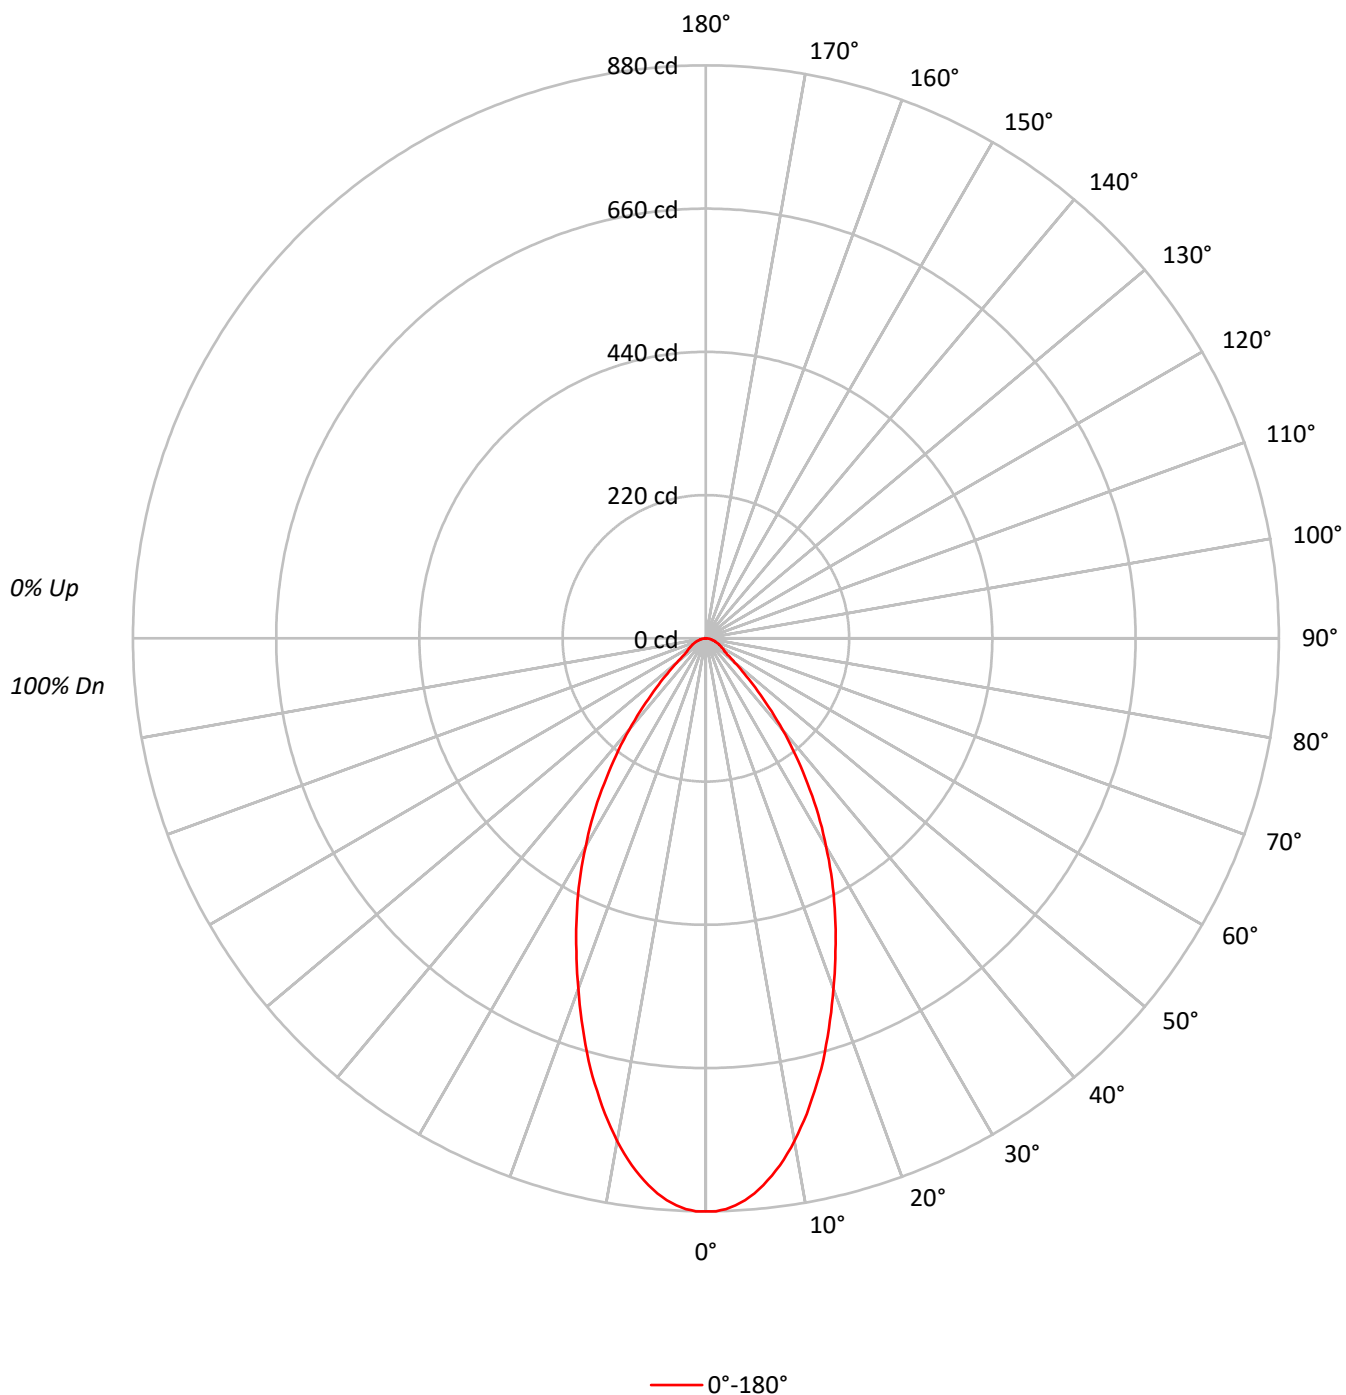

TEST NUMBER: P1261011

CATALOG NUMBER: P3AS24R259050D010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	192989
5°	188377
10°	174568
15°	155461
20°	133618
25°	113571
30°	93483
35°	72839
40°	52412
45°	33244
50°	19684
55°	13534
60°	12411
65°	11571
70°	10386
75°	9404
80°	8966
85°	7548

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 33244 cd/sqm

TEST NUMBER: P1261011

CATALOG NUMBER: P3AS24R259050D010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.4	9.8
10°-20°	190.1	23.4
20°-30°	214.8	26.5
30°-40°	169.9	20.9
40°-50°	85.8	10.6
50°-60°	34.4	4.2
60°-70°	22.0	2.7
70°-80°	12.1	1.5
80°-90°	3.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	484.3	59.6
0°-40°	654.2	80.6
0°-60°	774.4	95.4
0°-90°	812.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	812.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	880	
5°	856	79
15°	685	190
25°	469	215
35°	272	170
45°	107	86
55°	35	34
65°	22	22
75°	11	12
85°	3	3
90°	0	

TEST NUMBER: P1261011

CATALOG NUMBER: P3AS24R259050D010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	880.1
1°	880.1
2°	877.0
3°	872.0
4°	864.9
5°	855.8
6°	844.7
7°	831.5
8°	817.4
9°	801.2
10°	784.0
11°	764.8
12°	746.5
13°	725.3
14°	705.1
15°	684.8
17.5°	628.2
20°	572.6
22.5°	520.0
25°	469.4
27.5°	419.8
30°	369.2
32.5°	321.7
35°	272.1
37.5°	226.6
40°	183.1
42.5°	142.6
45°	107.2
47.5°	79.9
50°	57.7
52.5°	43.5
55°	35.4
57.5°	32.4
60°	28.3
62.5°	25.3
65°	22.3
67.5°	19.2
70°	16.2
72.5°	14.2
75°	11.1
77.5°	9.1
80°	7.1
82.5°	5.1
85°	3.0
87.5°	1.0



TEST NUMBER: P1261011

CATALOG NUMBER: P3AS24R259050D010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)